
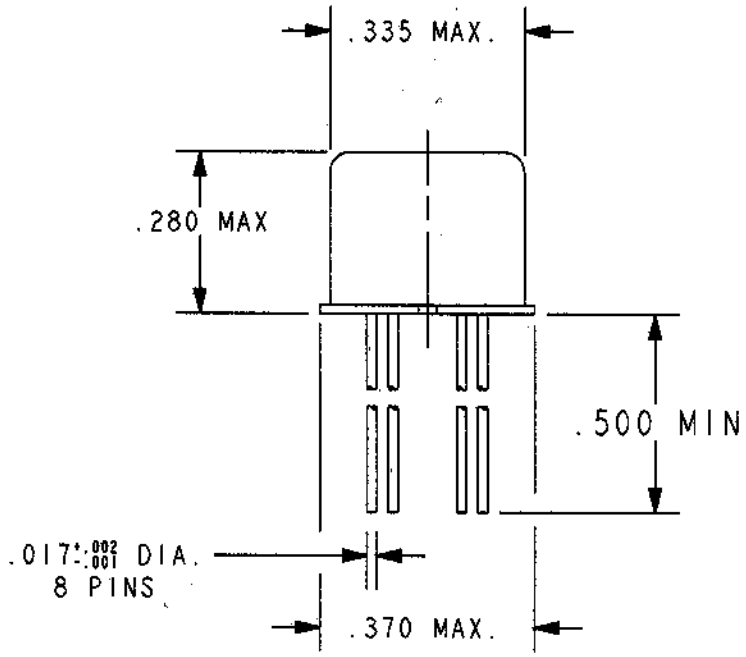


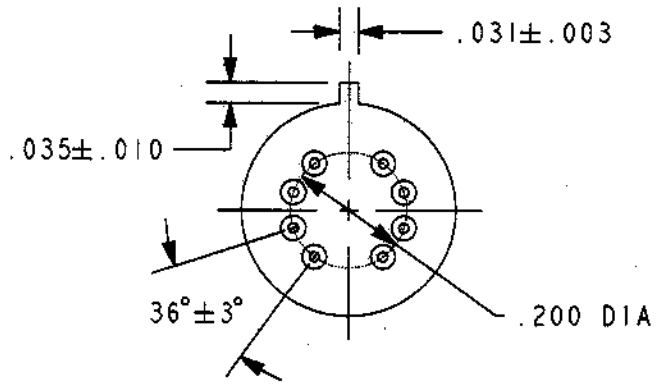

REV. 0
DCO 143490

COIL: @ 25°C

RESISTANCE	880 OHMS ±10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	10.5 VDC
MUST RELEASE	6.0 VDC MAX, 0.91 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 1.5 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 14MAR02 CK 15MAR02

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/9-061P REV.

"JMA" RELAY

JMAC-18XP

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1743455-2 175977-2 2310537-1 936348-1 TE50BR39J U5254-000005-030PA 1-962915-1 1393431-1 MPT100C18RF RH73H2A40MKTN ROX05SJ18R SBCHE64R7K 1903112-2 3-1393225-0 CRGCQ2010J3K3 SBCHE154R7K 917696-1 1-794222-0 1969656-1 2005330-1 2834055-1 141991-2 2-292161-3 2377783-2 2380312-2 3430B2F51RTDF 650075-000 CPF0402B37K4E1 SMW73R0JT 3631B101LL