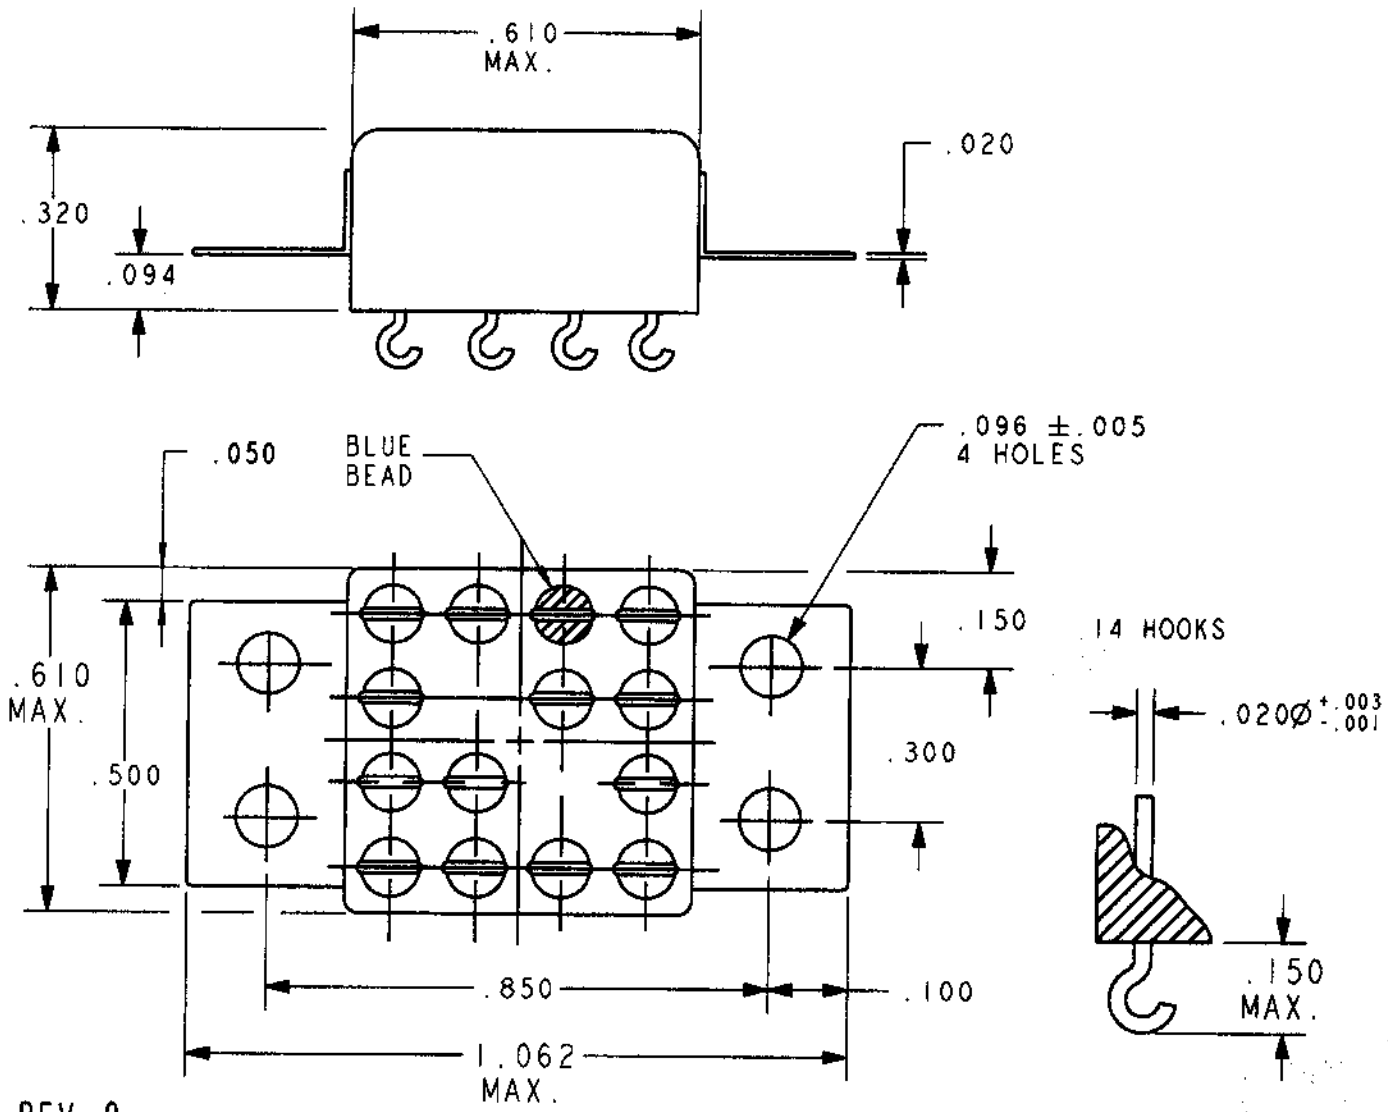


REV. 0

DCO 142925

TOL. = .010

COIL: @ 25°C

RESISTANCE 720 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C


NOTES: OPERATE 4 MS MAX.
RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUST. QPL

CUST. NO. M39016/14-001L REV.

"3SBH" RELAY

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 4/10/01 | CK. TLG 05-10-01

CII Technologies
advanced control electronic solutions

3SBH114 1A2

F-718 REV. 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

CPF0402B37K4E1 MPT100C18RF 1393431-1 2377783-2 3631B101LL TE50BR39J 2834055-1 1-962915-1 175977-2 1969656-1 917696-1 CRGCQ2010J3K3 ROX05SJ18R 1-794222-0 RH73H2A40MKTN SBCHE154R7K 2380312-2 1903112-2 2310537-1 SBCHE64R7K SMW73R0JT U5254-000005-030PA 3-1393225-0 2005330-1 2-292161-3 650075-000 936348-1 141991-2 1743455-2 3430B2F51RTDF