RIDERSERIES
RCM570T30

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



Standard relays in the RIDERSERIES RCM
- 4 CO contacts
- Optionally AC or DC coils
- with test button
- Comes optionally with integrated status display and/or free-wheel diode

General ordering data

Order No.	8690160000
Type	RCM570T30
Version	RIDERSERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 230 V AC, Continuous current: 6 A, Plug-in connection
GTIN (EAN)	4032248360819
Qty.	10 pc(s).

Creation date March 11, 2013 5:55:39 PM CET

Weidmüller

RIDERSERIES
RCM570T30

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Ratings

Conductor connection system	Plug-in connection	Humidity	40 °C / 93 % rel. humidity, no condensation
UL 94 flammability rating	V-0		

Dimensions and weights

Width	22.5 mm	Height	28 mm
Depth	29 mm	Net weight	28.2 g

Temperatures

Operating temperature	-40 °C...+70 °C	Storage temperature	-40 °C...+85 °C

Input

Rated control voltage	230 V AC	Rated current AC	4.3 mA
Coil resistance	19,465 Ω ±15 %	Power rating	1.0 VA
Response / drop-out voltage AC coil	184 V / 69 V	Status indicator	red LED

Output

Rated switching voltage	240 V AC	Max. switching voltage, AC	240 V
Continuous current	6 A	making current	12 A / 20 ms
Max. switching power	1500 VA	Response time	15 ms / 10 ms
Min. switching power	100 mA / 5 V, 10 V / 10 mA, 24 V / 1 mA	Max. switching frequency at rated load	0.1 Hz

Contact specifications

No. of contacts	4	Contact design	CO contact with test button
Contact material	AgNi 90/10	Mechanical service life	AC coil 20 x 10^6 Switching cycles, DC coil 30 x 10^6 Switching cycles

Insulation coordination

Rated voltage	250 V	Clearance and creepage distances for control side - load side	≥ 4 mm
Dielectric strength for control side - load side	2.5 KV_{eff} / 1 min.	Impulse withstand voltage	5 kV (1.2/50 µs)
Protection degree	IP 20	Insulating material group	IIIa

Other technical data

Version	with LED	Status indicator	red LED

Further details of approvals / standards

Standards	IEC 61810-1, UL508

RIDERSERIES
RCM570T30

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Classifications

ETIM 2.0	EC001437	ETIM 3.0	EC001437
UNSPSC	30-21-19-17	eClass 4.1	40-02-06-14
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01
eClass 7.0	27-37-16-01		

Approvals

Approvals

Downloads


Declaration of Conformity	K295_12_10.pdf


RIDERSERIES
RCM570T30


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com


Drawings

Electric symbol

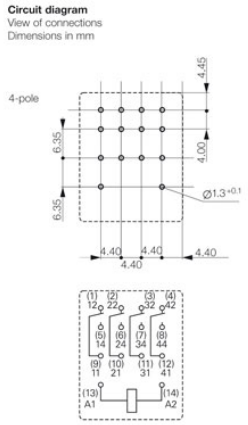

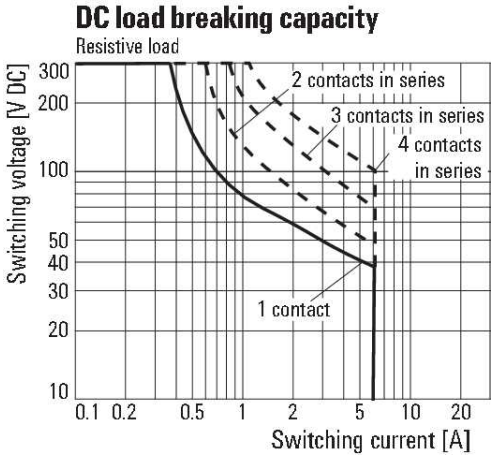

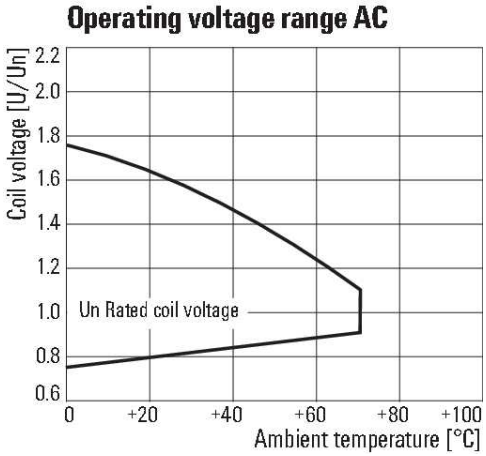

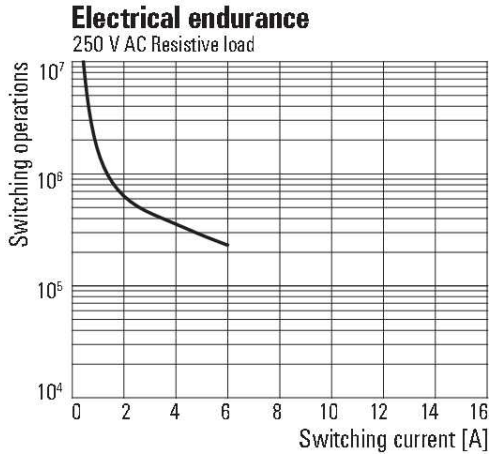

RIDERSERIES
RCM570T30

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Type code RCM ☐ ☐ ☐ ☐ ☐

Type RIDER Control Multiple

Contacts
- 2 2 CO contacts
- 3 3 CO contacts
- 5 4 CO contacts

Contact material
- 7 AgNi 90/10, with test button
- 8 AgNi 90/10 hgp, with test button

Type of construction
- 0 Standard, 2.8 mm Faston

		with LED	with LED + diode
DC coil			
006	6 V DC	L06	
012	12 V DC	L12	AB2
024	24 V DC	L24	AC4
048	48 V DC	L48	AE8
060	60 V DC	L60	
110	110 V DC	M10	BB0
220	220 V DC	N20	
AC coil			
506	6 V AC	R06	
512	12 V AC	R12	
524	24 V AC	R24	
548	48 V AC	R48	
615	115 V AC	S15	
730	230 V AC	T30	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

WeidmÃ¼ller:

1031470000 1121990000 1784180000 8690200000 8951460000 1609820000 1818090500 1890260000
1906650000 1950200000 9456650000 1013450000 1607520000 1608570000 1649300000 1779950000
1127570000 1221360000 2642470000 1124150000 1786450000 2535780000 024892 SAKS3 1289470000
1622940000 9037380000 1608830000 0303620000 1760040000 1804580000