
Materials
1. Insulator: PBT + 15% GF, black
2. Shell: C3604 brass, 2 µm nickel plated
3. Pin: C2680 brass, 2 µm nickel plated
4 Nut: C3604 brass, 2 µm nickel plated

Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 30 mΩ or less

Mechanical Requirements
Insertion force: 0.3-3 kgf
Withdrawal force: 0.3-3 kgf
Life cycle: 5000 mating cycles while maintaining 0.3-2 kgf min. insertion force, 0.2-1.5 kgf min. withdrawal force and less than 100 mΩ contact resistance.

Environmental Requirements
Heat test: 70 °C, relative humidity 70-85% for 96 hours without deformation while maintaining contact resitance after test 100 mohms or less, and insulation resistance 50 Mohms/500 Vdc minimum
Humidity test: 40 °C, relative humidity 90-100% for 96 hours without deformation while maintaining dielectric strength 500 Vac/1 minute, insulation resistance 50 Mohms/500 Vdc minimum, and contact resistance 100 mohms or less
Salt spray test: 35±2 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 80 mΩ.



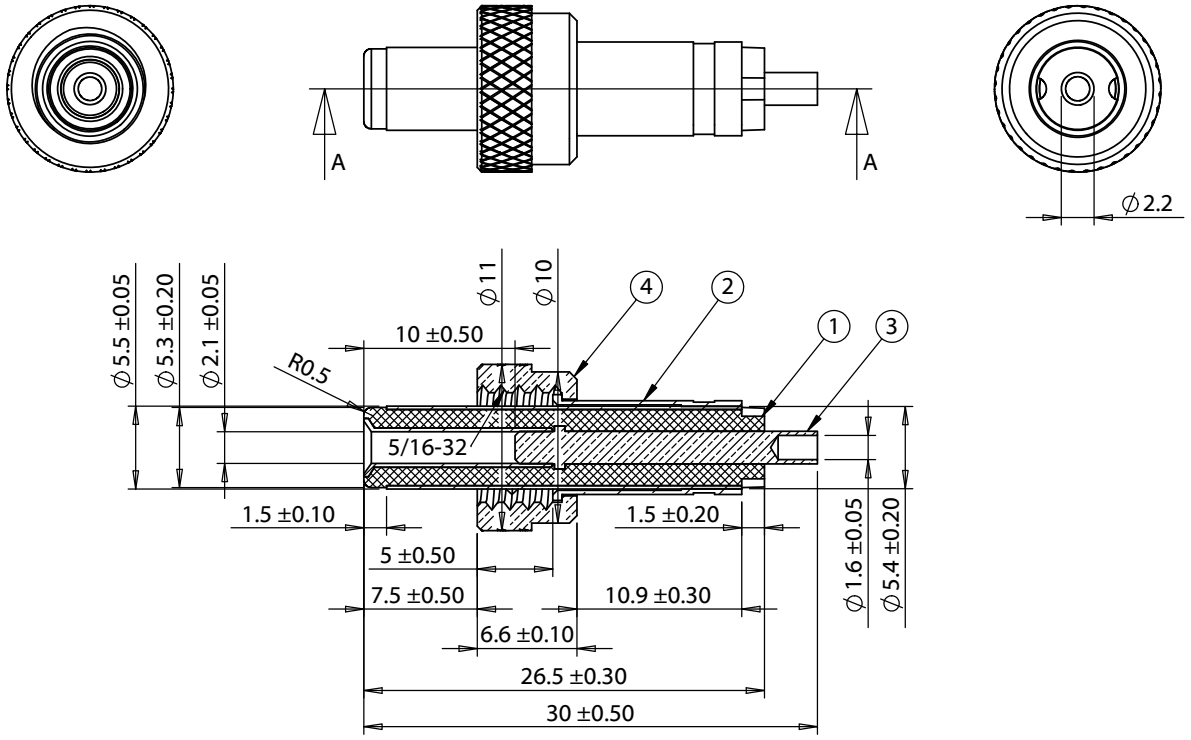

SECTION A-A

Revision:	Date:	Description:
A	5/19/2009	Initial release
A1	11/11/2015	Modified insulator material
A2	11/20/2017	Updated specifications

Prepared:
AG
Digitally signed by AG
Date: 2020.03.20 11:35:10 -07'00'

Verified:
AW
Digitally signed by AW
Date: 2020.09.21 11:44:16 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32


TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A
Part number: 50-00010
Scale: 2:1
Sheet 1 of 2

5 4 3 2 1

Ratings
Maximum Operating Voltage: 48 V
Maximum Operating Current: 8.0 A

Operating Temperature Range
-25~70 °C, relative humidity of 85% or less

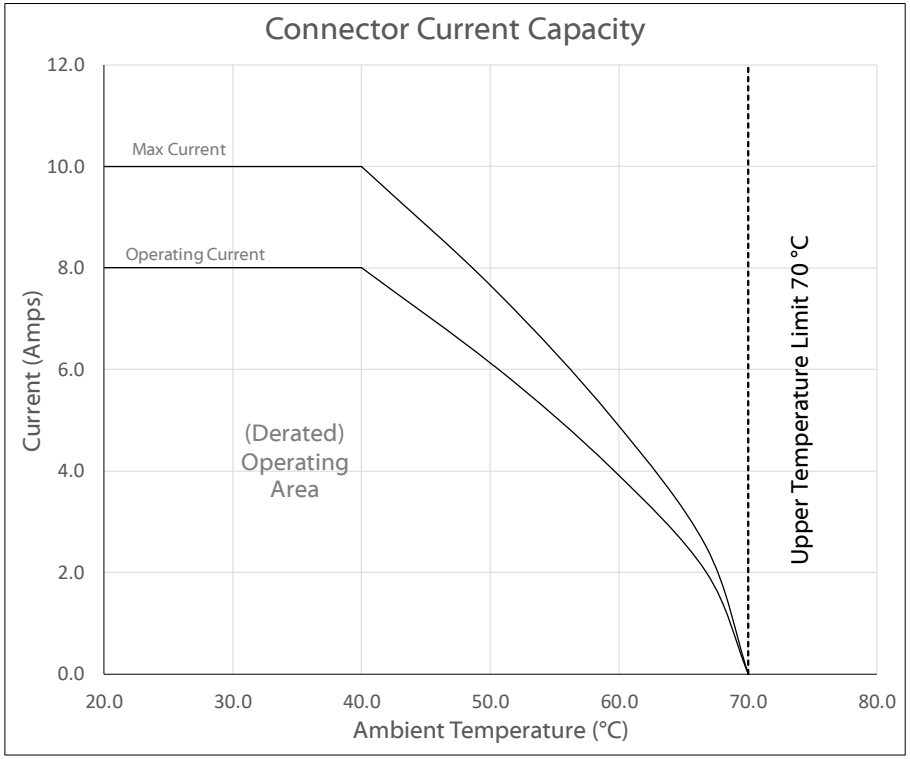

Testing based on IEC 60512-5-2. Max current curve generated with isolated test article under controlled environmental conditions, and does not take into account external factors such as housings,mating cables, or other circuitry. Operating current curve (derated by 20% of maximum values) accounts for external factors, and manufacturing variation.

Revision:	Date:	Description:
A	05/19/2009	Initial release
A1	11/11/2015	Modified insulator material
A2	11/20/2017	Updated specifications

Prepared:
AG
Digitally signed by AG
Date: 2020.03.20 11:35:39 -07'00'

Verified:
AW
Digitally signed by AW
Date: 2020.09.21 11:44:27 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.3 mm
X.X: ± 0.1 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32

TENSILITY
tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A
Part number: 50-00010
Scale: 2:1
Sheet 2 of 2

5 4 3 2 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Tensility International:

50-00534 10-02329 10-02224 30-00949 30-01568 30-01460 30-01031 30-01029 30-01943 30-01739
30-01776 30-02589 30-02557 30-00873 30-01657 30-02978 30-01520 10-02399 30-01991 30-01570
30-01727 053-0382R CA-2208 10-02380 10-01936 10-02385 30-01734 053-0276R 30-00656 10-02381