

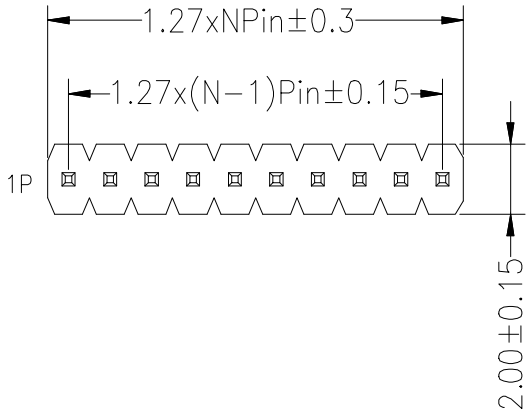



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

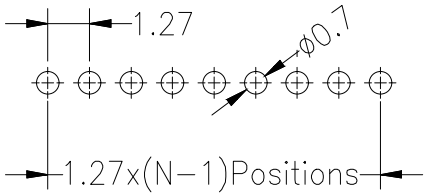

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

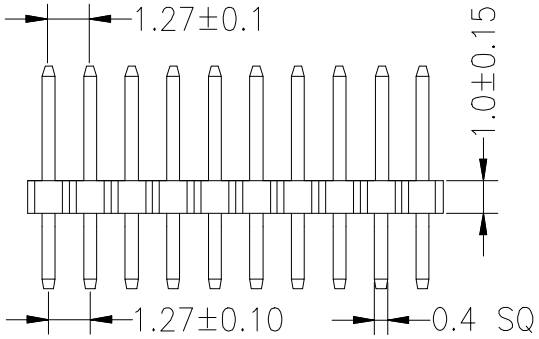

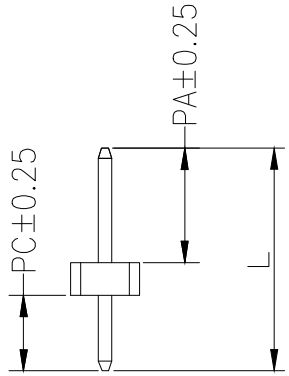

Dimension antitheses list			
ITEM	PA	PC	L
Standard	3.90	2.30	7.20
Alternate			

Ordering Information

PZ 127 - * - N - Z - * - **

- No.of Rows: 1=Single Row, 2=Dual Row
- No.of Pins: 2-40Pin
- Type: Z=直针, W=弯针, S=立贴, WS=卧贴
- Length (塑高)
- Contact Plating: G0:Gold Flash, G1:1u" Gold, G2:3u" Gold, G3:5u" Gold, G4:10u" Gold, G5:15u" Gold, G6:30u" Gold, S0:Gold Flash/Tin, S1:Tin

			GENERL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	1.27 单排 直排针(塑高1.0)	版 本 REV.	A
			X.XX ±0.20	比 例 SCALE					
1	初版发行		X.XXX ±0.10	投 影 Projection		产品料号 PART NO.	PZ127-1-N-Z-1.0-XX(L7.2)	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°			材 料 MATERIAL		页 次 SHEET	1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HCTL:

HC-PH-T PM254-2-02-Z-8.5 TC-0513D-4.5-260G PZ200-2-17-Z-C PZ254-2-03-W-8.5
HC-CZ254-3-16-Z-11.5-G0-F HC-MX3.0-4AW HC-RJ45-5JA-2-2 HC621601A-M890-A PH-6A PZ200-1-09-Z
PZ254-2-19-Z-8.5 HC-5264-3A HC-SPH-2*10A PZ200-2-06-W HC-PA-3AWD HC-AA0B010-093 HC-PA-4A
HC-ST-003-03-Z PH-4A PZ200-2-06-S HC-PH-2AWT PH-2AW PM254-1-12-W-8.5 XH-12A
PZ254-2-16-Z-8.5 HC-5264-3AW HC-PH-6AW-M HC-PHD-2*2AW PZ200-1-06-W