60x60x25 mm


29.0~40.0 CFM




Specifications

Model	Bearing	Rating Voltage	Power Current	Power Consumption	Speed	Air Flow	Static Pressure	Noise	Weight	Curve
	◓ 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(Inch-H_2O)	(dB(A))	(g)	
PE60251BX-000U-A99	◓	12	370	4.44	7600	40.0	0.64	46.0	71.0	1
PE60251B1-000U-A99	◓	12	297	3.57	6900	36.0	0.54	44.0	71.0	2
PE60251B2-000U-A99	◓	12	232	2.79	6100	31.5	0.42	42.0	71.0	3
PE60251B3-000U-A99	◓	12	197	2.37	5600	29.0	0.36	38.0	71.0	4
PE60252BX-000U-A99	◓	24	190	4.56	7600	40.0	0.64	46.0	75.0	1
PE60252B1-000U-A99	◓	24	155	3.72	6900	36.0	0.54	44.0	75.0	2
PE60252B2-000U-A99	◓	24	121	2.91	6100	31.5	0.42	42.0	75.0	3
PE60252B3-000U-A99	◓	24	104	2.50	5600	29.0	0.36	38.0	75.0	4

Air Flow-Static Pressure Characteristics

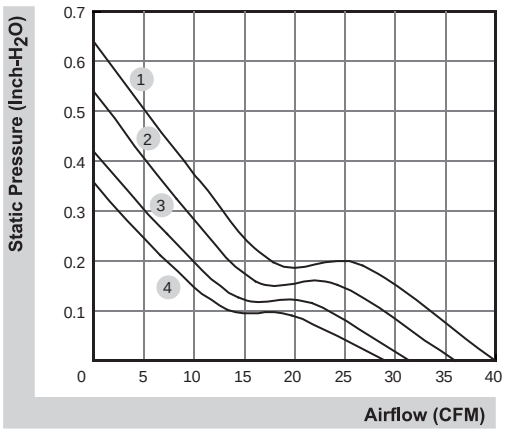

External dimensions(mm)

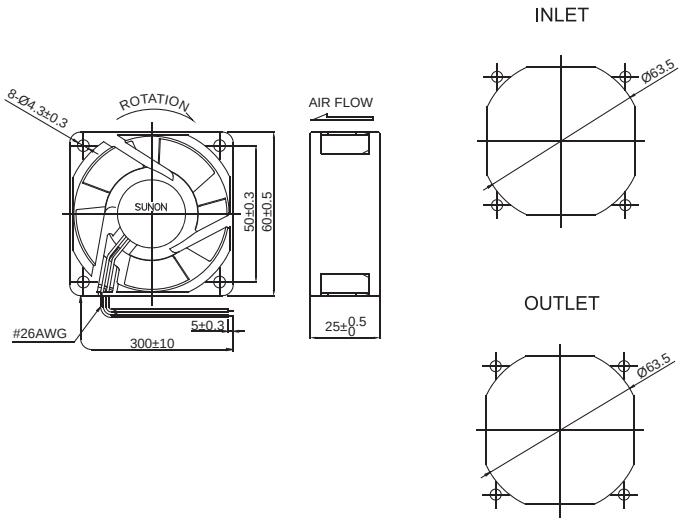

*All model could be customized. Please contact with Sunon Sales.
*Specifications are subject to change without notice. Please Visit SUNON website at http://www.sunon.com for update information.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Sunonwealth Electric:

EF80251S3-1000U-A99 MF50201V1-1B00U-A99 PE60252BX-000U-A99 PMD1207PTB1-A (2).GN CF4113LBT-1000U-SB9 EE40201S1-1000U-999 MF25060V1-1000U-A99 SF1212AD SL.GN SP101A 1123HBL.GN DP201A-2123HBL.GN MF30060V1-1000U-A99 MF80252V3-1000U-A99 MF92251V3-1000U-A99 MF25101V2-1000U-A99 MF40201VX-1000U-A99 MF60252V3-1000U-A99 UF3F3-500TC EF60251B2-1000U-A99 MF60251V1-1000U-A99 MEC0382V1-000U-A99 MF40060V2-1000U-A99 MF92251V1-1000U-A99 A2123-HBL.GN A2123-HSL.GN FG-5 MF30060V2-1000U-A99 MF35101V1-1000U-A99 CF4113LBL-1000U-SB9 EE80251S3-1000U-999 EEC0382B3-000C-A99