MATERIALS AND FINISHES:


BODY: BERYLLIUM COPPER
PLATED: GOLD (30μ-in) MIN
OVER NICKEL (100μ-in) MIN


CONTACT: BERYLLIUM COPPER
PLATED: GOLD (30μ-in) MIN
OVER NICKEL (100μ-in) MIN


INSULATOR: PTFE


EMI RING: BRASS
PLATED: GOLD (30μ-in) MIN
OVER NICKEL (100μ-in) MIN


VSWR: 1.20 MAX DC - 15.0 GHz
1.50 MAX 15.0 GHz - 26.5 GHz




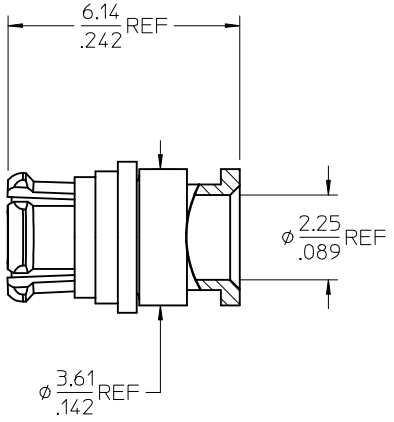






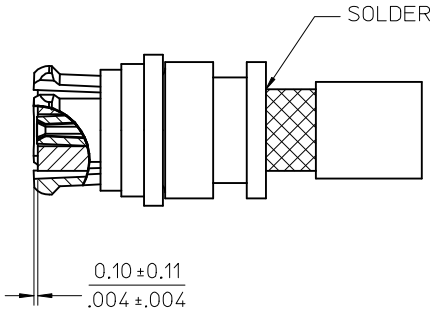

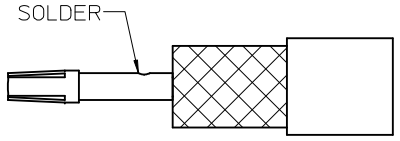

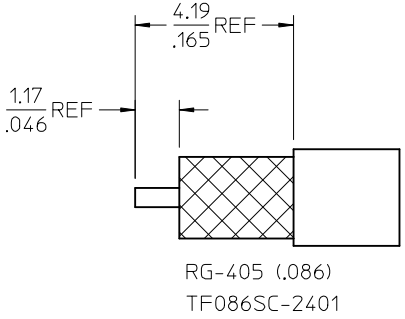

RECOMMENDED STRIP DIMENSIONS

73415-3741	ONE PER BAG
73415-3740	TRAY
PART NO.	PACKAGING

PS-89675-3320	ELEC/MECH PERFORMANCE
MIL-STD-348B, FIG. 326.1	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: VSWR WAS 1.30 MAX DC - 26.5 GHz. EC NO: URF2016-0283 2015/10/19
DRWN:BSHAH 2015/10/19
CHKD:SSS
APPR:AROBERTSON 2015/10/22
DESCRIPTION
C1
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± 0.010
2 PLACES	± 0.25	± ---
1 PLACE	± ---	± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE:
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: AROBERTSON DATE: 2010/09/29
CHECKED BY: SSS DATE: 2010/09/29
APPROVED BY: JWIENER DATE: 2010/09/30

TITLE: SMP JACK STRAIGHT 50 OHM TF086SC-2401 CABLE SMP-JC EWR-1350

molex MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-73415-374
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

528061110 0194360214 464373005 0351510214 194270031 355240920 528523070 34708-2028
348268126 349672001 502585-0370 197054301 459850483 194290039 351820290 503988100
0477256010 194290026 347928042 502380-0800 5023860371 197134001 347072012 357470310
528520870 348242245 0464363133 347910140 502584-0870 502584-1060