POLES	MATERIAL NO.	ENG. NO.	LENGTH
3	1300630003	C03000A48M020	2M +89-0MM (6'7"+3.50-0)
4	1300630089	C04000A48M020	2M +89-0MM (6'7"+3.50-0)

FACE VIEW-FEMALE INSERT

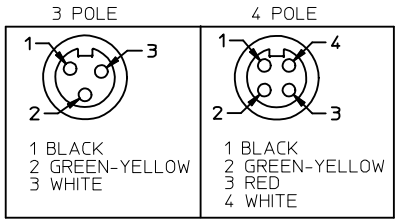

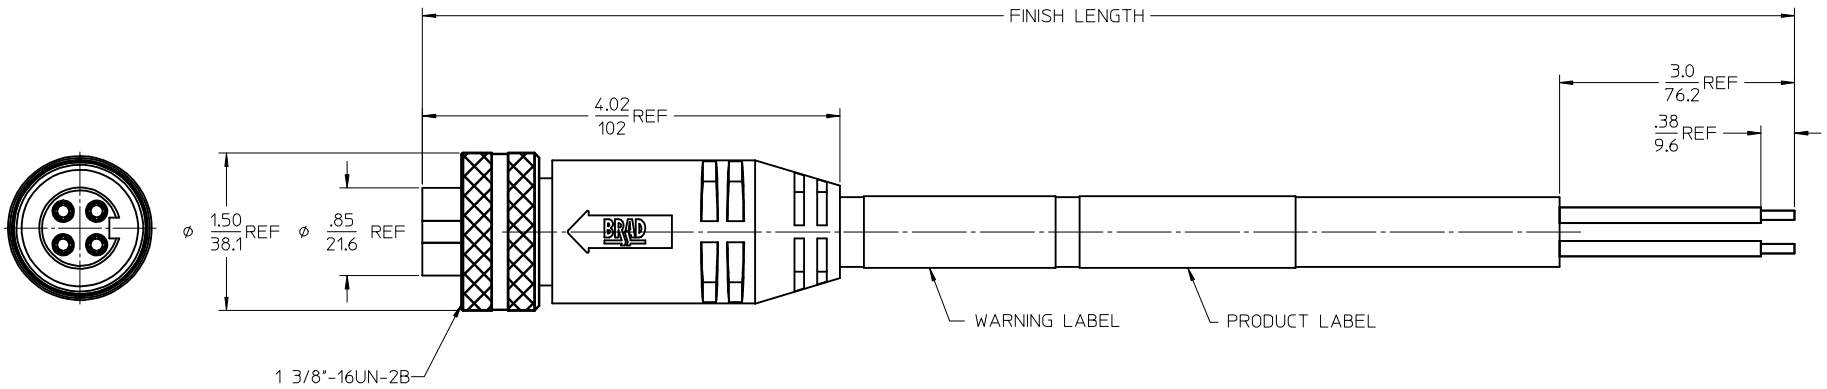

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & STOOW
ELECTRICAL: 600V AC/DC 32 AMPS

UPDATED DRAWING
EC NO: IPG2014-1095 2015/09/01
DRWN:GGUSTAFSON 2015/11/12
CH'KD:VOU
APPR: JFMURPHY 2015/09/16
DESCRIPTION
REV B

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 1:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY	B.RUPERT	DATE 01/12/10
CHECKED BY	B.WOODMAN	DATE 01/12/10
APPROVED BY	JFMURPHY	DATE 2010/01/15

TITLE: QUICK CHANGE FEMALE STRAIGHT 3 & 4 POLE AS PORTABLES

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-130063-089
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

0194360214 348268126 503988100 502584-0870 502584-1060 194270031 194290039 34708-2028
351820290 528523070 197134001 347928042 349672001 0351510214 347072012 357470310
5023860371 502585-0370 528061110 194290026 197054301 459850483 0477256010 347910140
348242245 464373005 502380-0800 528520870 0464363133 355240920