POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300640065	CC3030A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300640187	CC4030A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300640245	CC4030A48M100	32	10M +318-0MM (32'10" +12.5"-0")

©

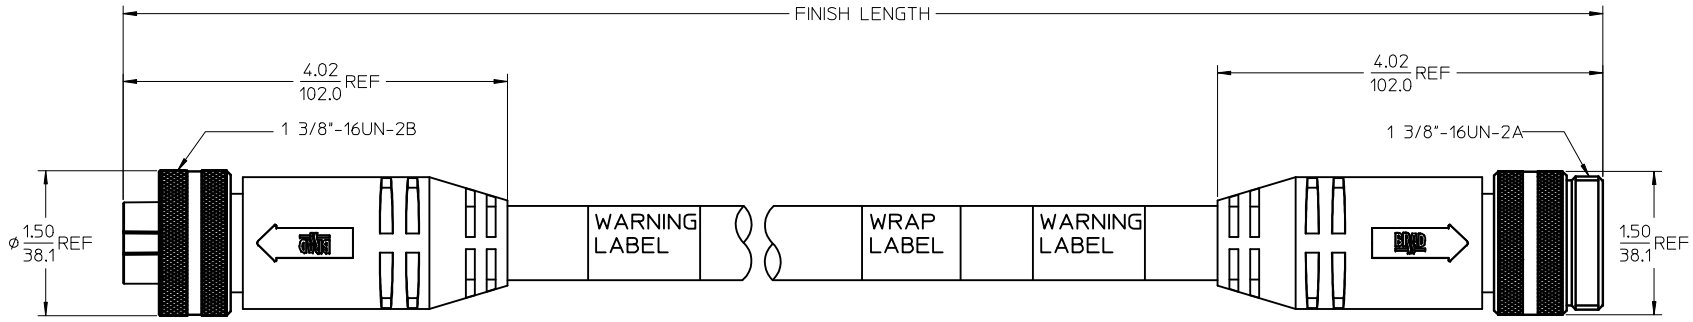

FACE VIEW-FEMALE INSERT

3 POLE	4 POLE
	
1 BLACK 2 GREEN-YELLOW 3 WHITE	1 BLACK 2 GREEN-YELLOW 3 RED 4 WHITE

FACE VIEW-MALE INSERT

3 POLE	4 POLE
	
1 BLACK 2 GREEN-YELLOW 3 WHITE	1 BLACK 2 GREEN-YELLOW 3 RED 4 WHITE

WIRING DIAGRAM
3 POLE



WIRING DIAGRAM
4 POLE



SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & STOOW
ELECTRICAL: 600V AC/DC

ADDED PART NUMBER
EC NO: IPG2016-1155
DRWN:GGUSTAFSON 2016/02/23
CH'KD:MZIELINSKI 2016/03/15
APPR:BWOODMAN 2016/02/23
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± ---	± .010
1 PLACE	± ---	± .020

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 1:2
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: B.RUPERT DATE: 01/12/10
CHECKED BY: B.WOODMAN DATE: 01/12/10
APPROVED BY: JFMURPHY DATE: 2010/01/15
MATERIAL NO.: SEE CHART

TITLE: QUICK CHANGE FEMALE/MALE STRAIGHT 3 & 4 POLE AS PORTABLES
MOLEX INCORPORATED
DOCUMENT NO.: SD-130064-065
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

197054301 355240920 0194360214 0351510214 34708-2028 357470310 464373005 194290039 347928042 5023860371 502585-0370 528520870 0477256010 349672001 351820290 503988100 0464363133 197134001 502380-0800 502584-0870 502584-1060 194270031 347910140 348268126 194290026 347072012 348242245 459850483 528523070 528061110