



ROHS

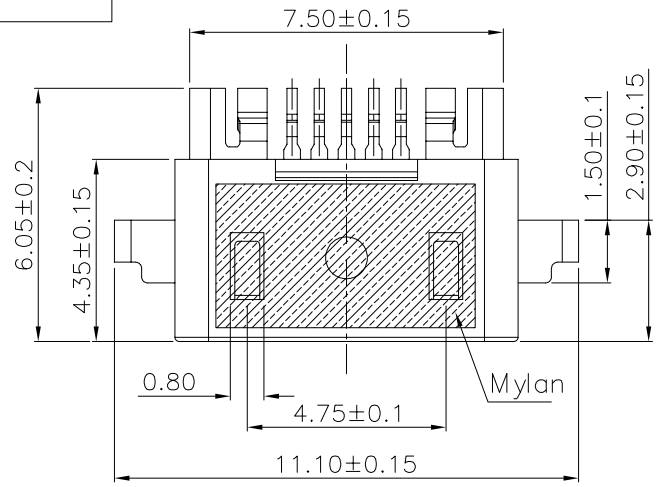


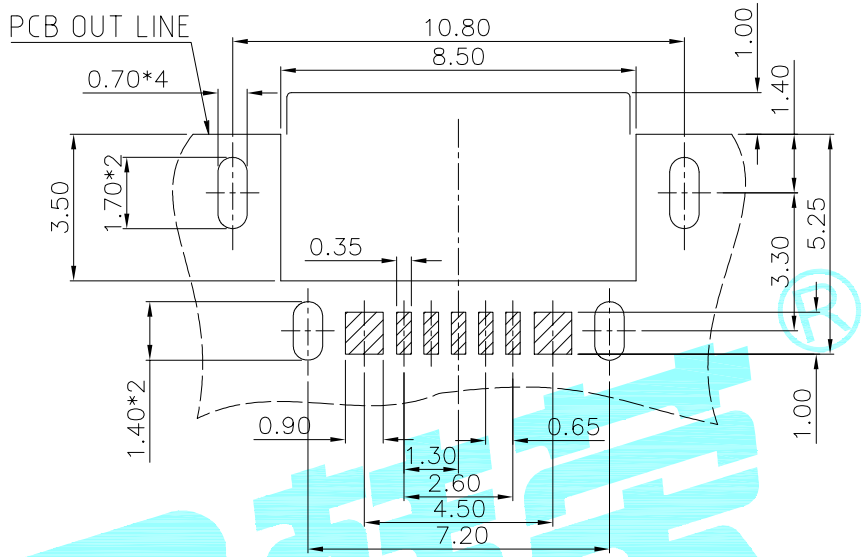

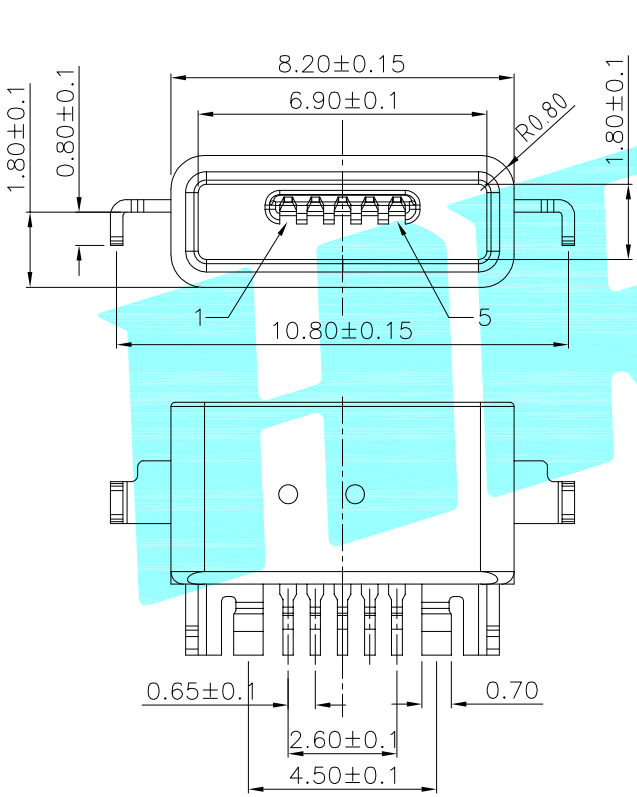

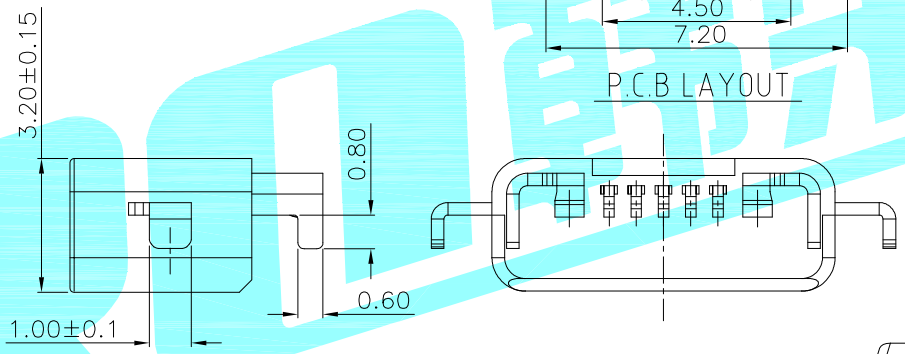

P.C.B LAYOUT

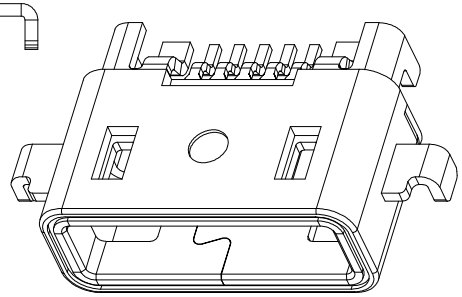

Specifications
1. Rating : AC\DC 30V 1.0A
2. Dielectric withstanding: 250V(AC) for 1min
3. Contact Resistance : 30mΩMax
4. Lnsulation Resistance: 500MΩ Min
5. Operating Temperature Range: −20℃+60℃
6. Operating Life : 5,000Cycles
7. IP Rating: IP64

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	Brass	Ni Plated	——
②	Contact	——	5	Phosphor Bronze	Au Plated	——
①	Housing	——	1	Nylon	Black	——

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD	
DRAWN	JKUN.LU	2014/9/29		
CHECKED			TITLE:	USB CONNECTOR
APPROVALS			PART NO.	U−E−M5DD−W−1
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~5 ±0.15; ANGLE ±2°			UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO. ——	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

DA-10RP K2-1102BG-I4CW-01 K2-1102DP-G4SW-04 K8-5851D-L1 SIM-08A U-C-M5DW-W-1 DS-01BP K2-1101DF-A4DW-01 K2-1102AT-A4CW-01 PJ-399B-6A U-F-M5DD-Y-L U-F-M5SS-W-5 K2-1818DP-A3SW-01 K3-1346S-F1 U-C-M5SS-Y-1 DC-031A-10A SS-22D03-G4 K2-1102DP-S3SW-04 K2-1102SP-A5SC-04 TYPE-C-31-M-04 U-F-M5DD-W-L U-F-M5DS-Y-1 K5-1617SA-01 DQ-03BP ES-07KP K2-1102SP-K4SC-04 K3-2258S-E1 PJ-3250-5A U-M-M5DD-W-2 U-F-M5DD-Y-L1