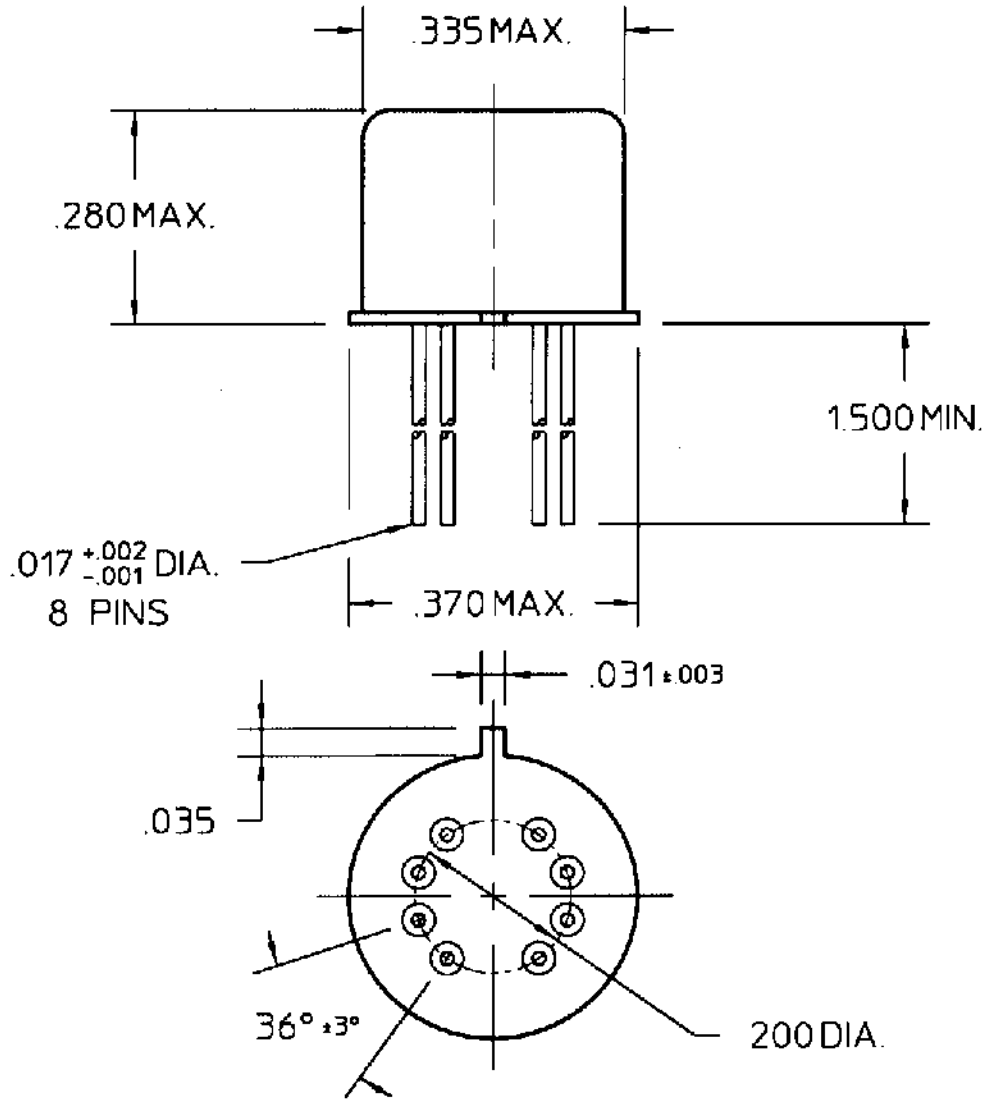



COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 1560 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 14.2 VDC |
| MUST RELEASE | 8.0 VDC MAX, 1.37 VDC MIN |

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 1.5 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUST. QPL
CUST. NO. M39016/9-018M

TYPE JMA RELAY

# CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/17/97 CK. [signature] 4/18/97

COMMUNICATIONS INSTRUMENTS, INC.

# JMAW-26XM

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## TE Connectivity:

936348-1 U5254-000005-030PA 650075-000 SBCHE154R7K 1743455-2 175977-2 1393431-1 141991-2 3631B101LL ROX05SJ18R 2005330-1 3430B2F51RTDF SBCHE64R7K 1969656-1 2-292161-3 2310537-1 2834055-1 CPF0402B37K4E1 CRGCQ2010J3K3 RH73H2A40MKTN 2377783-2 2380312-2 3-1393225-0 MPT100C18RF TE50BR39J 1-962915-1 1903112-2 917696-1 SMW73R0JT 1-794222-0