


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2017
© COPYRIGHT 2017 BY - TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER PCN E-17-013222	06JUN2017	CM	DM

4 SEAL TYPE	CONTACT SIZE	MIN. INSUL. OD [mm]	MAX. INSUL. OD [mm]	WIRE RANGE [mm^2] REF ONLY
NORMAL	16	.100 [2.540]	.134 [3.404]	14-20 AWG [2.0-.50]
E	16	.053 [1.346]	.120 [3.048]	14-20 AWG [2.0-.50]

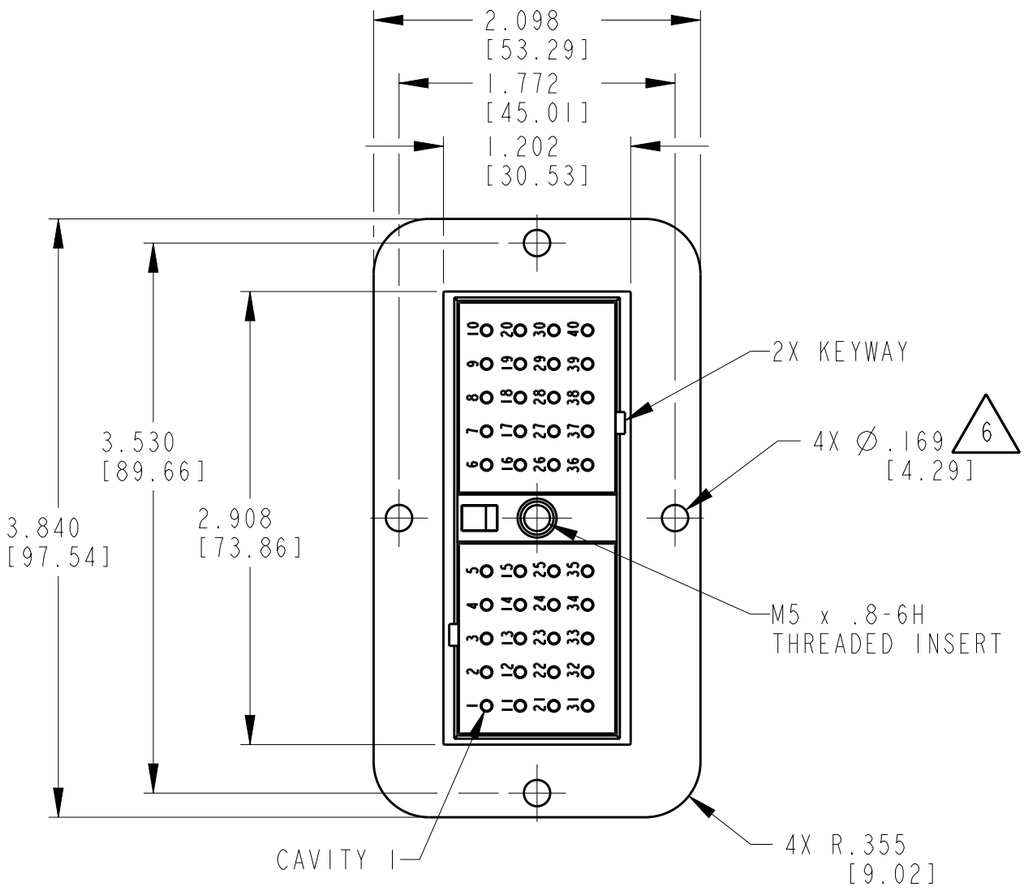

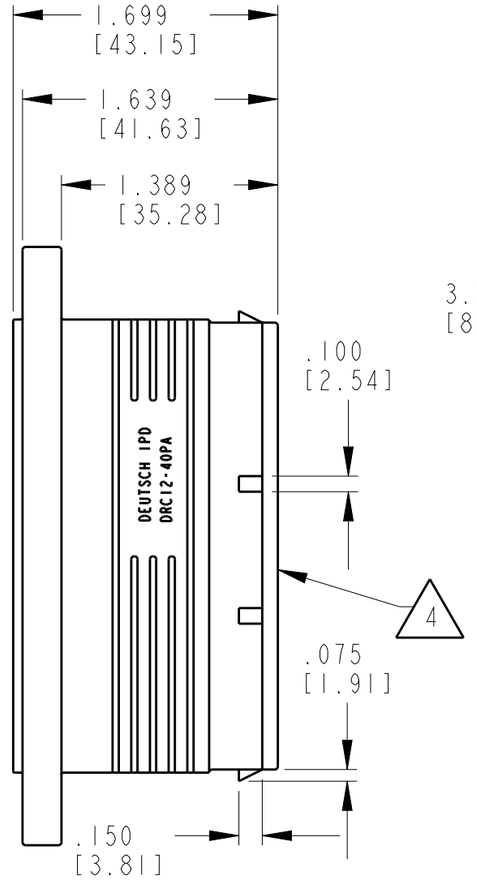

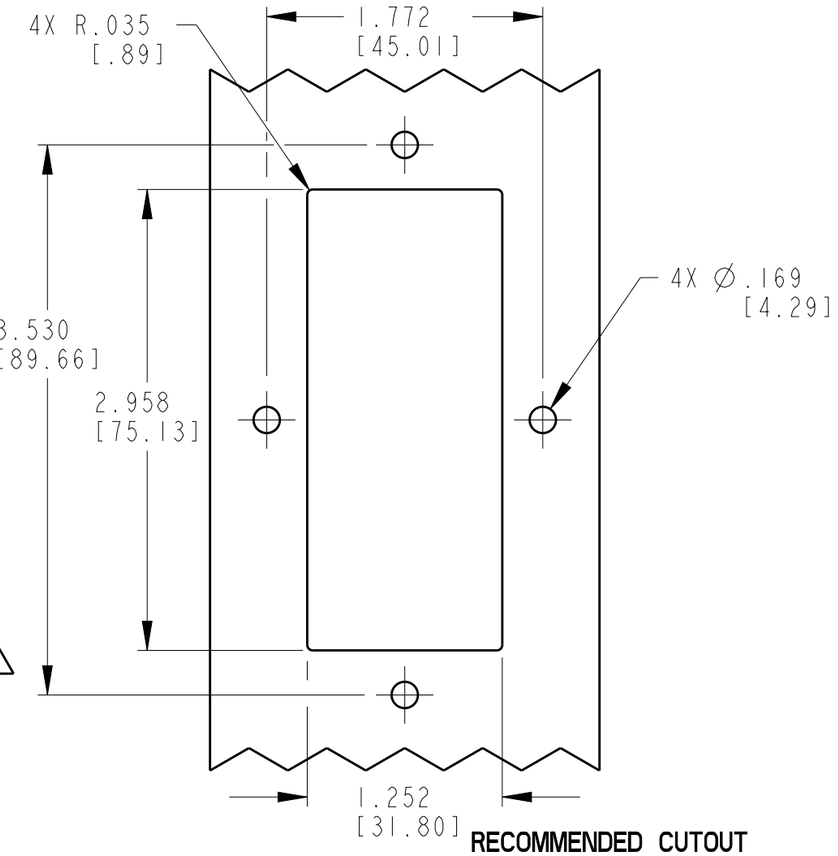

RECOMMENDED CUTOUT

TE INTERNAL PN	DEUTSCH PN
DRC12-40PA	DRC12-40PA
DRC12-40PAE	DRC12-40PAE

4. WHEN X = E: MARK LETTER "E" ON WELD CAP IDENTIFIES "E" WIRE SEAL.

3. THIS RECEPTACLE MATES WITH DRC16-40S-XXXX; DRC18-40SA-XXXX PLUGS. (XXXX= ALL MODIFICATIONS) CONSULT FACTORY FOR MODS.

2. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE DRAWING 0425-015-0000.

1. RECEPTACLE IS SUPPLIED WITH DUST CAP (NOT SHOWN).

NOTES:

6 RECOMMENDED SCREW: 8-32 [M4]. TORQUE: 20-25 IN-LB [2.26-2.82 Nm].

5 MATERIAL: HOUSING: PLASTIC; GROMMET: RUBBER; INSERT: STEEL.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [.635]
4 PLC ±
ANGLES ±0°30'0"

MATERIAL 5

FINISH - -

DWN D. MEYER 09AUG1999
CHK D. HASIBUAN 26SEP2011
APVD D. MEYER 27OCT2011
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME RECEPTACLE, FLANGED 40 SIZE 16 DRC SERIES KEY ARRANGEMENT -A- -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-DRC12-40PAX	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV E

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2310537-1 ROX05SJ18R TE50BR39J 1-962915-1 CPF0402B37K4E1 MPT100C18RF SMW73R0JT U5254-000005-030PA 1393431-1 141991-2 650075-000 RH73H2A40MKTN 1903112-2 936348-1 1743455-2 175977-2 2005330-1 3430B2F51RTDF 2-292161-3 2380312-2 2834055-1 3631B101LL 917696-1 2377783-2 3-1393225-0 SBCHE154R7K 1-794222-0 1969656-1 CRGCQ2010J3K3 SBCHE64R7K