
SERIES TL3313 SWITCHES

SUB-MINIATURE TACTILE

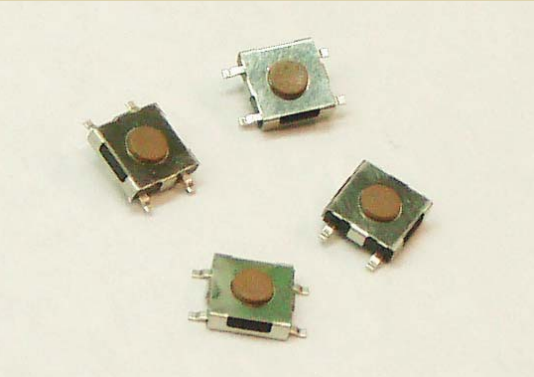

MECHANICAL SPECIFICATIONS

Mechanical Life:	100,000 cycles
Force:	100 +/- 50 gf; 160 +/- 50 gf; 250 +/- 50 gf
Travel:	0.25 mm +0.2 /-0.1mm

ELECTRICAL SPECIFICATIONS

Electrical Life:	100,000 cycles
Contact Rating:	50mA @ 12VDC
Contact Resistance:	50mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	250VAC (1 minute)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-20ºC to +70ºC
Storage Temperature:	-30ºC to +80ºC

FEATURES & BENEFITS

Sub-miniature

APPLICATIONS / MARKETS


Computer Servers/peripherals
Performance Audio
Instrumentation
Telecommunications/networking


HOW TO ORDER:

SERIES	MODEL	ACTUATOR	OPERATING FORCE	CONTACT	TERMINATION
TL	3313	A = 1.5mm	F100 = 100 gf F160 = 160 gf F250 = 250 gf	Q = Silver	G = Gull Wing


Example Ordering Code: TL-3313-A-F100-Q-G


Specifications subject to change without notification.






SCHEMATIC

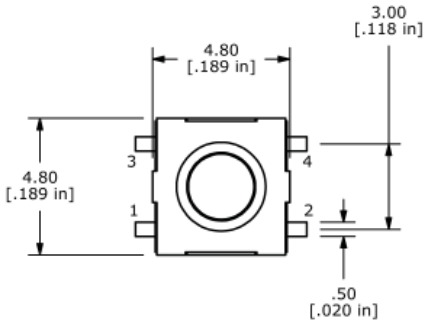

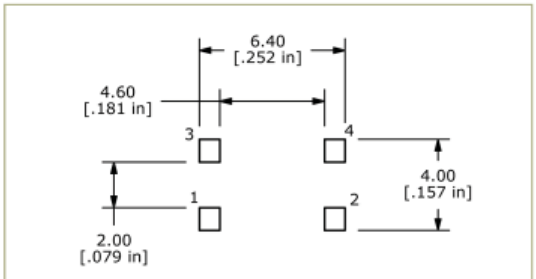

MOUNTING

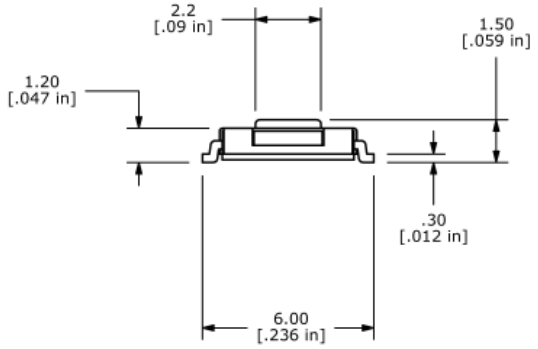

www.e-switch.com
email: info@e-switch.com

7153 NORTHLAND DRIVE NORTH
MINNEAPOLIS, MN 55428

PHONE: 800-867-2717
FAX: 763-531-8235

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

E-SWITCH:

WBL4UEEGBQR05CLR TL1240GQ2JBLK 6JBLK EG1270 EG1271 PV4F2Y0SS-315 R5ABLKBLKFF0 RT1105AF260Q ULV4FMGSS341 100DP1T1B1M1QEH PBH6UEENAGX TL3342F450QG PVS7F2HSS331 R1966ABLKBLKFF TL9100AF350Q KAE01SGGT TD1150AF100Q TL1105SPF100Q TL59FF260Q 200USP9T1A1M2RE TL1100CF160Q MS0850506F075P1A PS1023ABLK TL-3315-N-F100-Q TL1105VF100Q TL3253BRNBRN160Q EG1213 LB22F2GQ1111 PS1024ALRED TL3312NF160Q