

STRAIGHT PLUG SOLDER TYPE


CABLE .085

R123.054.000

Series : **QMA**

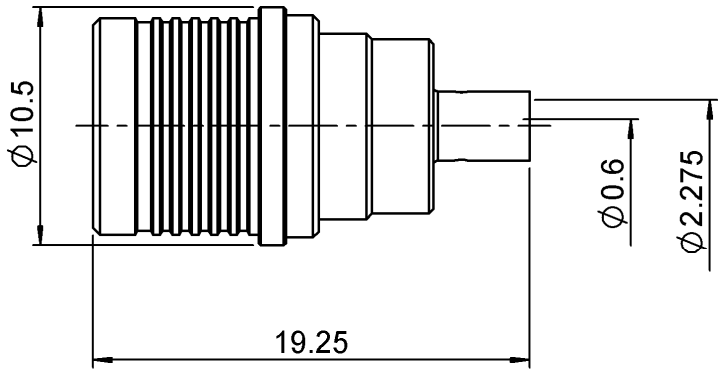



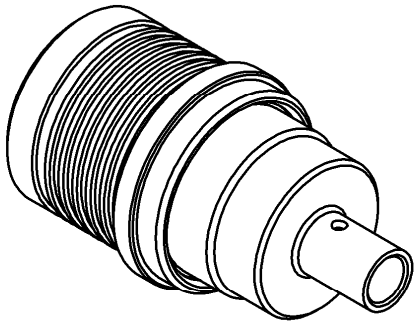

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**BBR 2**
CENTER CONTACT	**BRASS**	**NPGR**
OUTER CONTACT	**BRASS**	**BBR 2**
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	**BRASS**	**BBR 2**
-	-	-
-	-	-

Issue : 0923 E

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

STRAIGHT PLUG SOLDER TYPE

CABLE .085

R123.054.000

Series : **QMA**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-6**	GHz
VSWR	**1.05** +	**0,0150**	x F(GHz) Maxi
Insertion loss		**.05**	√F(GHz) dB Maxi
RF leakage	- (	**80**	- F(GHz)) dB Maxi
Voltage rating		**335**	Veff Maxi
Dielectric withstanding voltage		**750**	Veff mini
Insulation resistance		**5000**	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention

Axial force – Mating end	**NA**	N mini
Axial force – Opposite end	**NA**	N mini
Torque	**NA**	N.cm mini

Recommended torque

Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Clamp nut	**NA**	N.cm
A/F clamp nut	**0,0000**	mm

Mating life	**100**	Cycles mini
Weight	**4,9480**	g

ENVIRONMENTAL

Operating temperature	**-40/+105**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	3,17	0,00	0,00	0,00	0,00	0,00

Assembly instruction :

Recommended cable(s)
KS 1
RG 405

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	**130**	N mini
- torque	**NA**	N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.051.000	STRIPPING TOOL	
R282.063.000	POINTER GAUGE	
R282.740.000	SOLDERING MOUNTING	
R282.744.220	SOLDERING POSITIONER (CENTER CONTACT)	
R282.862.090	CONTROL GAUGE	

OTHERS CHARACTERISTICS

: 3 < F < 6GHz :> 70db
Intermodulation:-120dBc at 1.8GHz(2x20W)

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®


STRAIGHT PLUG SOLDER TYPE

CABLE .085


R123.054.000

Series : **QMA**

COMPONENTS

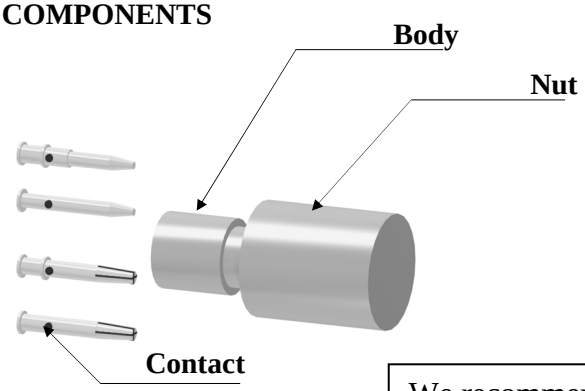


STRIPPING DIMENSIONS



We recommend a thermal preconditionning cable


1

Insert the cable into the clamp element.
Present the pointer in front of the clamp element.
Push the cable until it stops, while holding the clamp element pushed on the hollow part of the pointer.
Turn the clamp element until the release of the pointer.

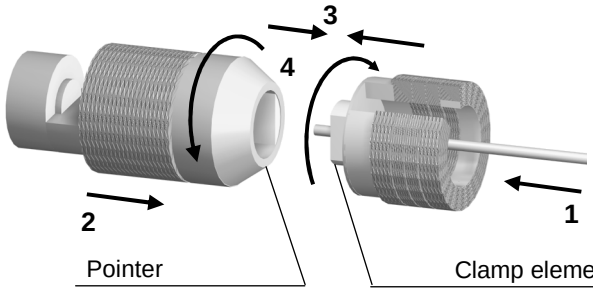

2


Present the cutting element in front of the clamp element.
Push and turn both elements , back part opposite to the front part.Once they reach the stop, pull without revolving.

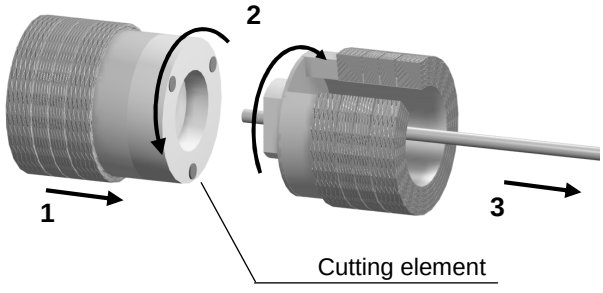

3


Mount the positioner A.
Slide the centre contact into the positioner A.
Insert the solder gauge between the centre contact and the cable.
Tighten
Solder the contact.

1 - Positioner A

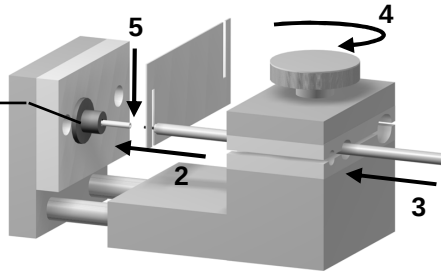

4

After cooling, remove the assembly from the jig.
Positioning the connector onto the Assembly jig.
Slide the cable into the connector until It bottoms against the insulator
Tighten.
Put three rings of solder around The able and solder.
After cooling, remove the assembly From the jig.

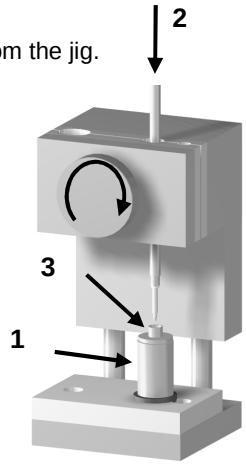

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

R114554000W R141557000W R143012000 R180300007W R929101/C290001-10CM R284C0351050 R284C0351054 R316553000 R124510000W R141407000W R223424000 EPXBE13P1SB R125326000 R191329000 R284C0351015 R284C0351026 R929104/C290004-20CM R125403001 R114165000W R142076161 R161325000W R180160007 R191303000 R112186000 R142703000 R191405000 R284C0351003 EPXBE28SA R112553000 R125078000W