


TRADE MARK
-MADE IN JAPAN: MXJ
-MADE IN MALAYSIA: MXL

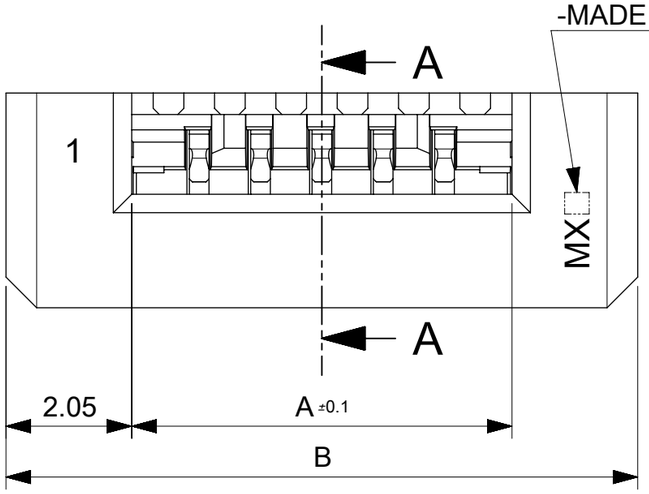

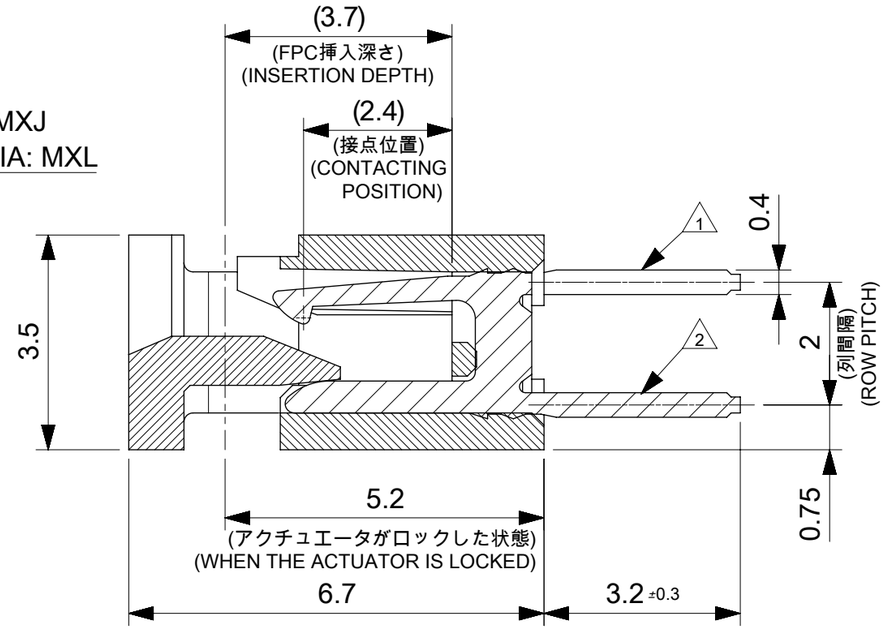

SECTION A-A

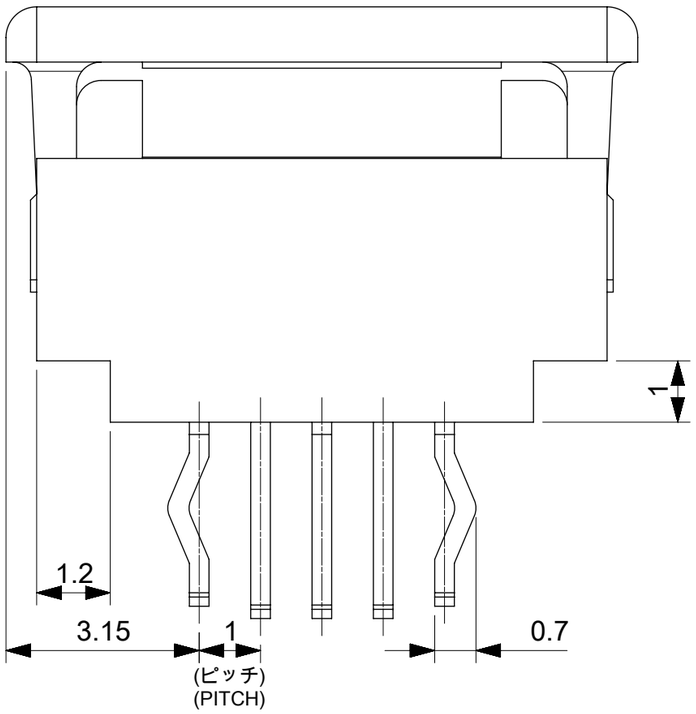

注記
NOTES

△1 CKT.NO.1を基準に偶数番目のソルダーテール。
EVEN NO. SOLDER TAIL.

△2 CKT.NO.1を基準に奇数番目のソルダーテール。
ODD NO. SOLDER TAIL.

3. 材料
MATERIAL
ターミナル:リン青銅、ニッケル下地、錫ビスマスめっき(t=0.32)
TERMINAL:PHOSPHOR BRONZE, TIN-BISMUTH OVER NICKEL PLATING.
ハウジング:66ナイロン、UL94V-0
HOUSING:66NYLON, UL94V-0
アクチュエータ:ポリエステル、UL94V-0
ACTUATOR:POLYESTER, UL94V-0

4. 本製品は、52030-**10の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52030-**10.

B	A	オーダー番号 ORDER NO.	極数 CKT.
35.3	31.2	52030-3029	30
34.3	30.2	52030-2929	29
33.3	29.2	52030-2829	28
32.3	28.2	52030-2729	27
31.3	27.2	52030-2629	26
30.3	26.2	52030-2529	25
29.3	25.2	52030-2429	24
28.3	24.2	52030-2329	23
27.3	23.2	52030-2229	22
26.3	22.2	52030-2129	21
25.3	21.2	52030-2029	20
24.3	20.2	52030-1929	19
23.3	19.2	52030-1829	18
22.3	18.2	52030-1729	17
21.3	17.2	52030-1629	16
20.3	16.2	52030-1529	15
19.3	15.2	52030-1429	14
18.3	14.2	52030-1329	13
17.3	13.2	52030-1229	12
16.3	12.2	52030-1129	11
15.3	11.2	52030-1029	10
14.3	10.2	52030-0929	9
13.3	9.2	52030-0829	8
12.3	8.2	52030-0729	7
11.3	7.2	52030-0629	6
10.3	6.2	52030-0529	5
9.3	5.2	52030-0429	4
8.3	4.2	52030-0329	3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

QUALITY SYMBOLS
EA = 0
EC = 0
ED = 0
▼ = 0
C = 0
☒ = 0
■ = 0
V = 0

EC NO: 102046
DRWN: JASANUMA 2015/12/01
CHK'D: YNOGAWA 2015/12/09
APPR: YNOGAWA 2015/12/09
A REV

GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± 3.0 °
4 PLACES ± 0.2
3 PLACES ± 0.2
2 PLACES ± 0.2
1 PLACE ± 0.25
0 PLACES ± 0.3
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: mm
SCALE: 10:1
DRWN BY: JASANUMA DATE: 2015/12/01
CHK'D BY: KTAKAHASHI DATE:
APPR BY: YNOGAWA DATE: 2015/12/09
DRAWING SIZE: A3
THIRD ANGLE PROJECTION

molex

1.0 FPC CONN ZIF (ST)


PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
52030	SEE CHART	GENERAL

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
520301000	PSD	000	1 OF 2


RELEASE STATUS	P1	RELEASE DATE	2015/12/09 09:03:44

FORMAT: tb-prod-A3
REVISION: F
DATE: 2015/11/16

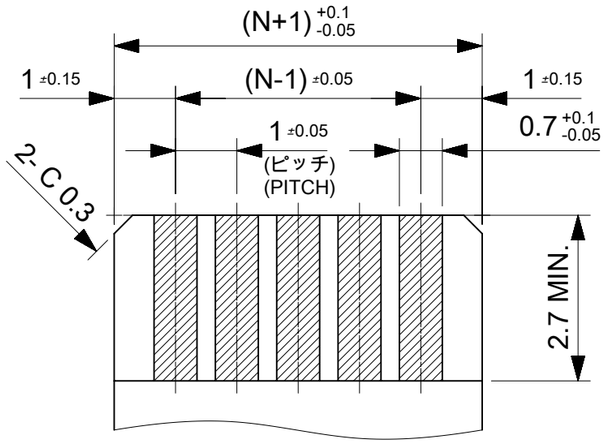

(仕上がり厚さ:0.3±0.05)
(THICKNESS:0.3±0.05)

適合FPC推奨寸法
APPLICABLE FPC RECOMMENDED DIM.

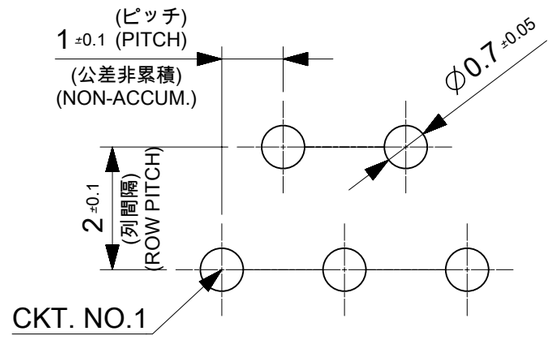

基板取付穴推奨寸法(t=1.6)
RECOMMENDED P.C.BOARD HOLE DIM.(t=1.6)
(マウント面)
(MOUNT SURFACE)

FPCについて:
打ち抜き方向は、導体側から補強板側を推奨致します。
補強フィルム材質は、ポリイミドを推奨致します。
接着剤は、熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL:
STIFFENER FILM: POLYIMIDE
BONDING AGENT: THEROSETTING BONDING AGENT

QUALITY SYMBOLS
EA = 0
EC = 0
ED = 0
▼ = 0
C = 0
☒ = 0
■ = 0
V = 0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 102046
DRWN: JASANUMA 2015/12/01
CHK'D: YNOGAWA 2015/12/09
APPR: YNOGAWA 2015/12/09

REV: A

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 3.0 °	
4 PLACES	± 0.2
3 PLACES	± 0.2
2 PLACES	± 0.2
1 PLACE	± 0.25
0 PLACES	± 0.3

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: mm
SCALE: 1:1
DRWN BY: JASANUMA DATE: 2015/12/01
CHK'D BY: KTAKAHASHI DATE:
APPR BY: YNOGAWA DATE: 2015/12/09
DRAWING SIZE: A3
THIRD ANGLE PROJECTION

molex

1.0 FPC CONN ZIF (ST)

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
52030	SEE CHART	GENERAL

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
520301000	PSD	000	2 OF 2

RELEASE STATUS	P1	RELEASE DATE	2015/12/09 09:03:44

FORMAT: master-tb-prod-A3
REVISION: F
DATE: 2015/11/16

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

0150200051 151670248 2178431123 0982670423 217471-1221 2181021034 2183231061 1300970327
2138642633 2147561082 2153482125 2174712111 559320830 151660751 2163012123 1451300703
2147632113 2174911213 2175202124 2153252062 2153261101 936012539 150200083 151660051
2162721083 216288-1063 1200878703 2174902123 2174911202 2175101122