


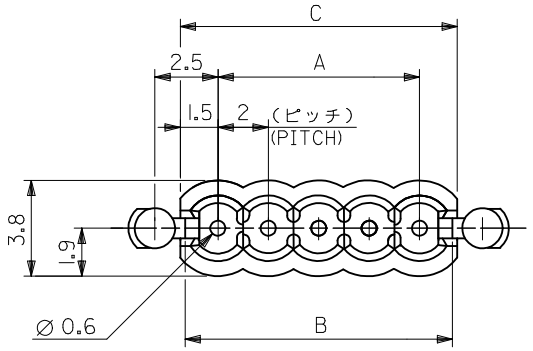





電線挿入図
SECT.(CABLE ASS'Y)

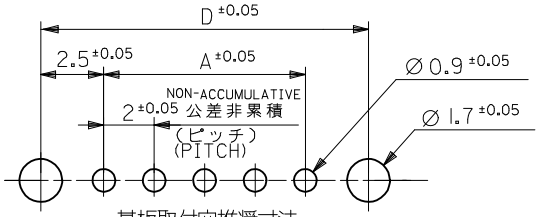


基板取付穴推奨寸法
RECOMMENDED P.C.BOARD HOLE DIM.
(t=1.6±0.05)

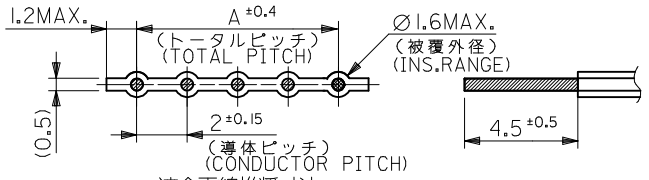

適合電線推奨寸法
RECOMMENDED WIRE DIM.

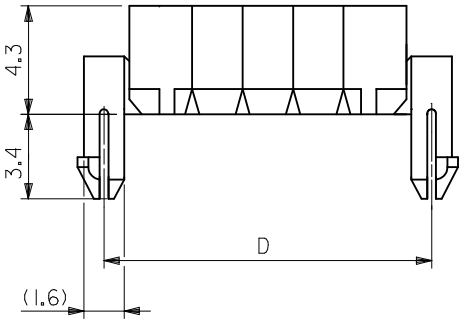



D	C	B	A	ENG. NO.	極数 CKTS.
37	35	34.6	32	51048-1700	17
35	33	32.6	30	-1600	16
33	31	30.6	28	-1500	15
31	29	28.6	26	-1400	14
29	27	26.6	24	-1300	13
27	25	24.6	22	-1200	12
25	23	22.6	20	-1100	11
23	21	20.6	18	-1000	10
21	19	18.6	16	-0900	9
19	17	16.6	14	-0800	8
17	15	14.6	12	-0700	7
15	13	12.6	10	-0600	6
13	11	10.6	8	-0500	5
11	9	8.6	6	-0400	4
9	7	6.6	4	-0300	3
7	5	4.6	2	51048-0200	2

注記
NOTES

1. 材料：ナイロン66、UL94V-2
   MATERIAL : NYLON66 , UL94V-2
2. 適合電線：2mmピッチリボンケーブル
   AWG#26錫コート平行線
   APPLICABLE WIRE : 2mm PITCH
   RIBBON CABLE WIRE
   AWG#26,TOP COATED WIRE

REVISED
EC NO: J2014-0350 2013/08/26
DRWN:SSATO02 2013/08/26
CH'KD:KASAKAWA 2013/08/26
APPR:NUKITA 2013/08/26
DESCRIPTION
REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 5:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: T.ITOH DATE:
CHECKED BY: M.FUKUSHIMA DATE: '92/02/27
APPROVED BY: M.ENOMOTO DATE: '92/02/27
MATERIAL NO.: SEE TABLE

TITLE: 2.0 CABLE HOLDER (FOR 4.5 STRIP LENGTH)

molex

DOCUMENT NO.: SD-51048-001
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

349672001 459850483 528523070 194290039 0351510214 0464363133 502584-1060 503988100
528061110 194290026 502380-0800 528520870 5023860371 502584-0870 0194360214 355240920
348242245 464373005 194270031 197054301 357470310 502585-0370 197134001 34708-2028
347928042 351820290 0477256010 347072012 347910140 348268126