

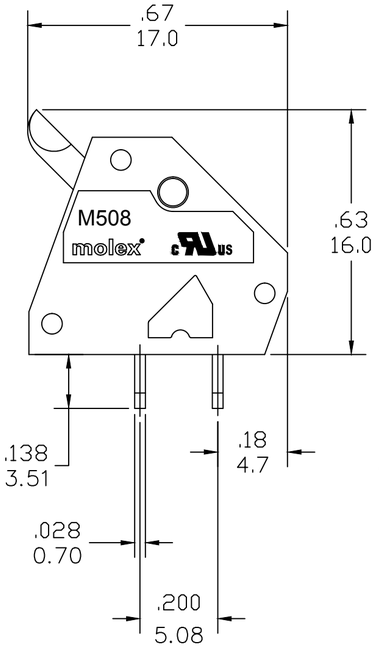


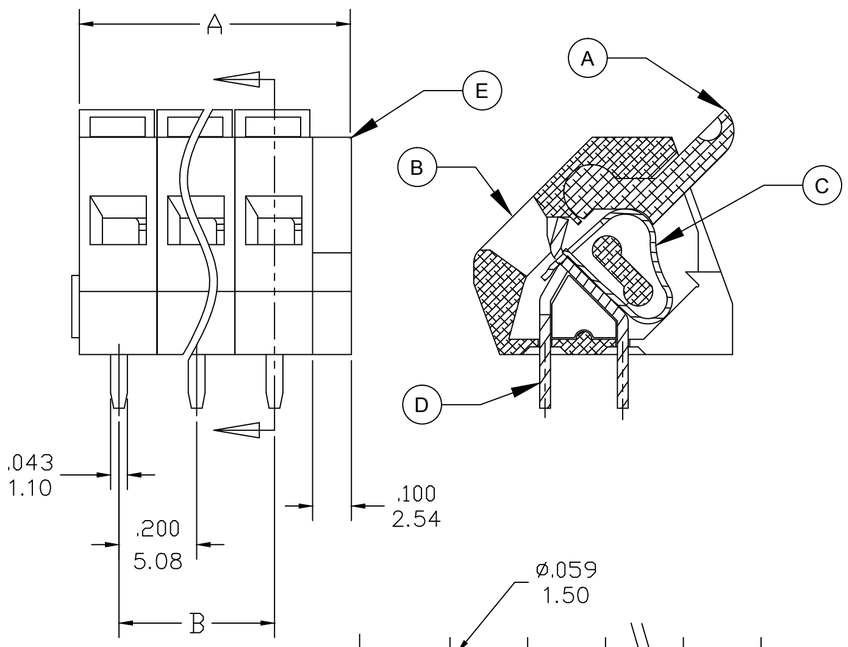

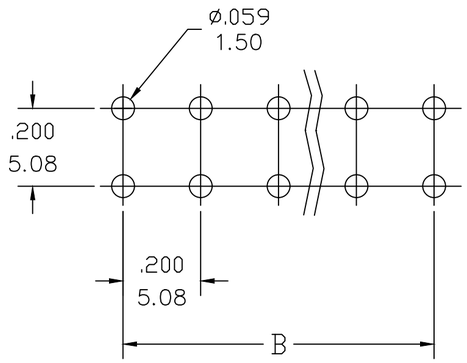

PCB LAYOUT


PART NUMBER DATA							
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN	mm	B IN	mm
2	397000102	M508-00-2-02-3	GREEN	.50	12.7	.200	5.08
3	397000103	M508-00-2-03-3	GREEN	.70	17.8	.400	10.15
4	397000104	M508-00-2-04-3	GREEN	.90	22.9	.600	15.23
5	397000105	M508-00-2-05-3	GREEN	1.10	27.9	.800	20.31
6	397000106	M508-00-2-06-3	GREEN	1.30	33.0	1.000	25.39
7	397000107	M508-00-2-07-3	GREEN	1.50	38.1	1.199	30.46
8	397000108	M508-00-2-08-3	GREEN	1.70	43.2	1.399	35.54
9	397000109	M508-00-2-09-3	GREEN	1.90	48.3	1.599	40.62
10	397000110	M508-00-2-10-3	GREEN	2.10	53.3	1.799	45.70
11	397000111	M508-00-2-11-3	GREEN	2.30	58.4	1.999	50.77
12	397000112	M508-00-2-12-3	GREEN	2.50	63.5	2.199	55.85
13	397000113	M508-00-2-13-3	GREEN	2.70	68.6	2.399	60.93
14	397000114	M508-00-2-14-3	GREEN	2.90	73.7	2.599	66.01
15	397000115	M508-00-2-15-3	GREEN	3.10	78.7	2.799	71.08
16	397000116	M508-00-2-16-3	GREEN	3.30	83.8	2.999	76.16
17	397000117	M508-00-2-17-3	GREEN	3.50	88.9	3.198	81.24
18	397000118	M508-00-2-18-3	GREEN	3.70	94.0	3.398	86.32
19	397000119	M508-00-2-19-3	GREEN	3.90	99.1	3.598	91.39
20	397000120	M508-00-2-20-3	GREEN	4.10	104.1	3.798	96.47
21	397000121	M508-00-2-21-3	GREEN	4.30	109.2	3.998	101.55
22	397000122	M508-00-2-22-3	GREEN	4.50	114.3	4.198	106.63
23	397000123	M508-00-2-23-3	GREEN	4.70	119.4	4.398	111.70
24	397000124	M508-00-2-24-3	GREEN	4.90	124.5	4.598	116.78

SPECIFICATIONS:

1. MATERIAL:
   - A. BUTTON: PA66 UL94 V-0
   - B. BODY : PA66 UL94 V-0
   - C. SPRING: ST. STEEL
   - D. TERMINAL: BRASS TIN PLATED
   - E. COVER: PA66 UL94 V-0
2. WIRE SIZE: 26 - 12AWG (SOL/STR)
3. ELECTRICAL RATING (UL): 300V, 18A
4. WIRE STRIP LENGTH: .30 (7.5mm)
5. POWER FREQUENCY WITHSTAND: AC 2500V FOR 1 MINUTE
6. INSULATION RESISTANCE: DC 500V, 500MΩ
7. RATED IMPULSE VOLTAGE: 4000V PLUS AND MINUS 5 TIMES EACH
8. OPERATING TEMPERATURE: -40°C TO +105°C
9. DIMS SHOWN ARE FOR REFERENCE ONLY

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-24	±0.010
>6-30	±0.40	0.24-1.18	±0.016
>30-120	±0.50	1.18-4.76	±0.020
>120	±0.80	>4.76	±0.031

ENGINEERING NUMBER LEGEND

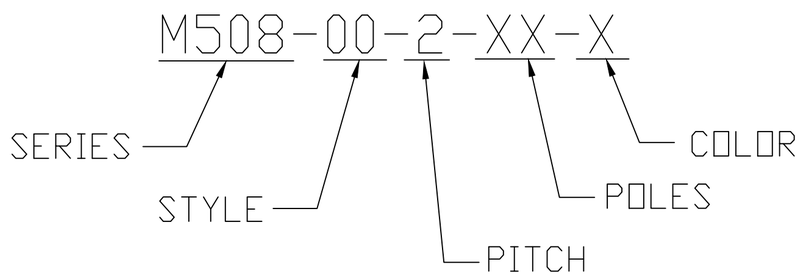

EC_DESCRIPTION
EC NO: IPG2014-0570
DRWN: RSTONE 2013/11/07
CH'KD: ---
APPR: ---
B
REV
DESCRIPTION

QUALITY SYMBOL
▼=0
C ▽=0

DIMENSION STYLE: IN/MM	SCALE: ---	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: RSTONE DATE: 2013/10/02	TITLE: SPRING TERMINAL BLOCK .200 (PITCH 45 DEG) MODULAR, LOW PROF		
CHECKED BY: ---- DATE: ----			
APPROVED BY: ---- DATE: ----	MOLEX INCORPORATED		
MATERIAL NO.: SEE_TABLE	DOCUMENT NO.: SD-39700-006	SHEET NO.: 1 OF 1	
SIZE: C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

502380-0800 0194360214 0477256010 348242245 459850483 503988100 528061110 0464363133 194270031 349672001 355240920 502584-1060 0351510214 194290039 197054301 197134001 528520870 347072012 347928042 348268126 5023860371 34708-2028 502584-0870 528523070 347910140 357470310 502585-0370 194290026 351820290 464373005