


ENG No:			AE-3190-NA
DIM "D"			(11.43) .450
DIM "C"			(19.05) .750
CCT SIZE	DIM "A"	DIM "B"	PART No
3	(7.92) .312	(11.89) .468	26-19-2031
4	(11.89) .468	(15.85) .624	26-19-2041
5	(15.85) .624	(19.81) .780	26-19-2051
6	(19.81) .780	(23.77) .936	26-19-2061
7	(23.77) .936	(27.74) 1.092	26-19-2071
8	(27.74) 1.092	(31.70) 1.248	26-19-2081
9	(31.70) 1.248	(35.66) 1.404	26-19-2091
10	(35.66) 1.404	(39.62) 1.560	26-19-2101
11	(39.62) 1.560	(43.59) 1.716	26-19-2111
12	(43.59) 1.716	(47.55) 1.872	26-19-2121
13	(47.55) 1.872	(51.51) 2.028	26-19-2131
14	(51.51) 2.028	(55.47) 2.184	26-19-2141
15	(55.47) 2.184	(59.44) 2.340	26-19-2151
16	(59.44) 2.340	(63.40) 2.496	26-19-2161
17	(63.40) 2.496	(67.36) 2.652	26-19-2171
18	(67.36) 2.652	(71.32) 2.808	26-19-2181
19	(71.32) 2.808	(75.29) 2.964	26-19-2191
20	(75.29) 2.964	(79.25) 3.120	26-19-2201

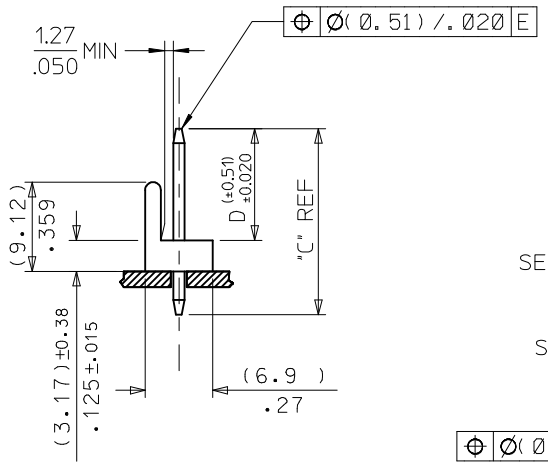

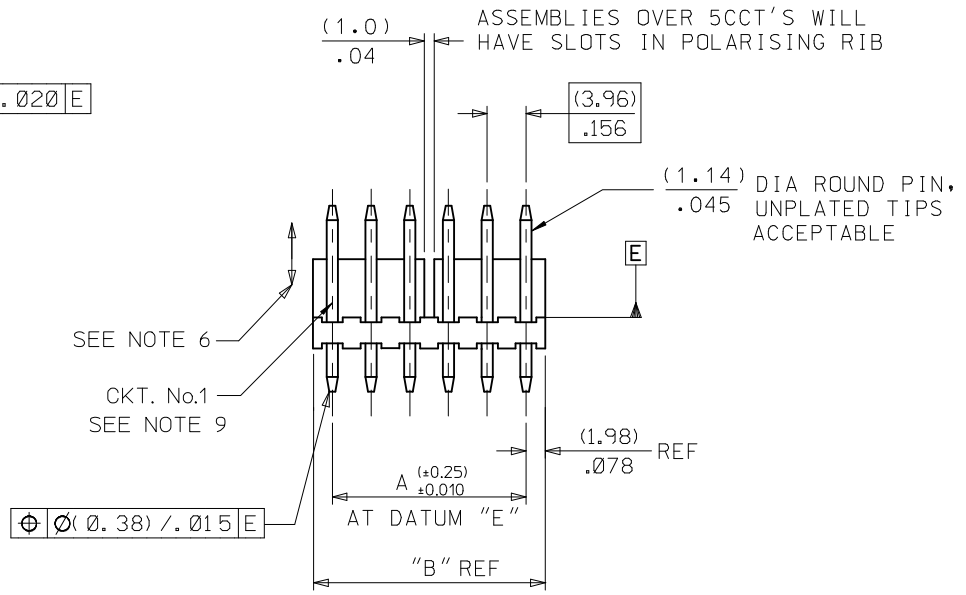

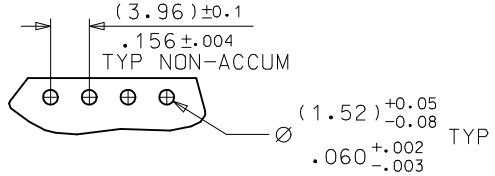

RECOMMENDED PCB HOLE DIMENSIONS

NOTES:
1. MATERIAL: HOUSING: NYLON, UL94V-2, COLOR: NATURAL
   PINS: BRASS
2. FINISH: (0.00254)/.000100 MIN. MATTE TIN OVER
   (0.00127)/.000050 MIN. NICKEL
   UNPLATED TIPS ACCEPTABLE
3. PRODUCT SPECIFICATION: PS-99020-0087
4. PACKAGING SPECIFICATION: PER PK-3190-001
5. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
6. PIN PUSHOUT FORCE 3 LBS MIN.
7. PIN MUST CONFORM TO MOLEX SOLDERABILITY SPEC SMES-152 AFTER PLATING.
8. RECOMMENDED PCB BOARD 1.6MM
9. CIRCUIT 1 USED TO DEFINE VOID LOCATION. CIRCUIT 1 MAY OR MAY NOT ALIGN WITH CIRCUIT 1 OF THE MATING PART.

REMOVE 2CKT
EC NO: UCP2016-0549 2015/08/06
DRWN:GES 2015/08/06
CHKD:JDFOX
APPR:FSMITH 2015/08/24
DESCRIPTION
REV AD1

QUALITY SYMBOLS
F=0
F=0
F=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.35	± ---
0 PLACE	±	±

ANGULAR ±1/2°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: T.MOHON DATE: 1998/10/02
CHECKED BY: M.GOONEY DATE: 1998/10/02
APPROVED BY: MWILHITE DATE: 1998/10/02
MATERIAL NO.: SEE CHART

TITLE: WAFER POL KK .156 FOR .045 ROUND PINS
molex
DOCUMENT NO.: SDAE-3190-N**
SHEET NO.: 1 OF 2
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

348242245 355240920 194270031 528520870 197134001 34708-2028 347910140 357470310 459850483 502380-0800 502584-1060 0351510214 0464363133 0477256010 348268126 349672001 347072012 0194360214 194290026 194290039 502584-0870 502585-0370 528523070 464373005 5023860371 503988100 528061110 347928042 197054301 351820290