


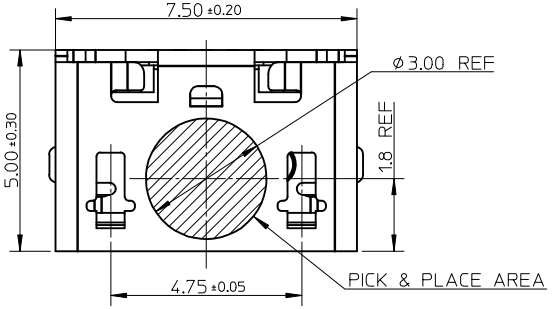


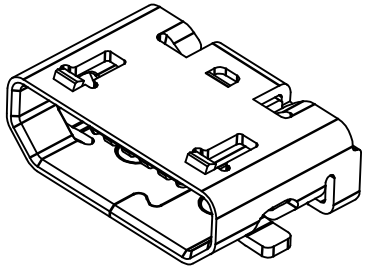


NOTES:

1. MATERIAL:
   HOUSING: LCP, BLACK, UL94V-0;
   TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
   SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.
2. PLATING:
   TERMINAL:
   CONTACT AREA: GOLD FLASH OVER 0.75 MICRON MINIMUM Pd/Ni;
   SOLDER TAIL AREA: GOLD FLASH;
   UNDER PLATING: NICKEL 2.0MICRON MINIMUM.
   SHELL:
   MATTE TIN 2.0MICRON MINIMUM;
   UNDER PLATING: NICKEL 1.27MICRON MINIMUM.
3. TAIL & NAIL COPLANARITY 0.08mm MAXIMUM.
4. PRODUCT SPECIFICATION: PS-47642-001.
5. PACKAGE SPECIFICATION: PK-47346-002.
6. COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV 2000/53/EC.

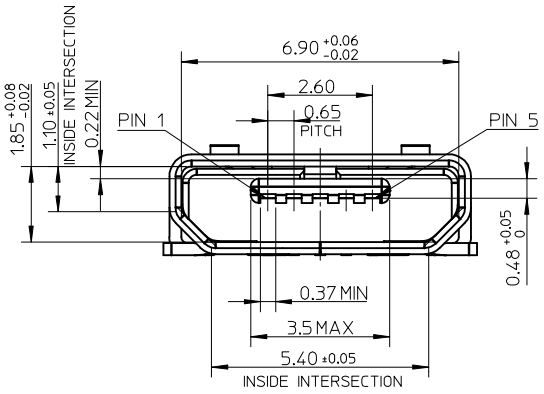




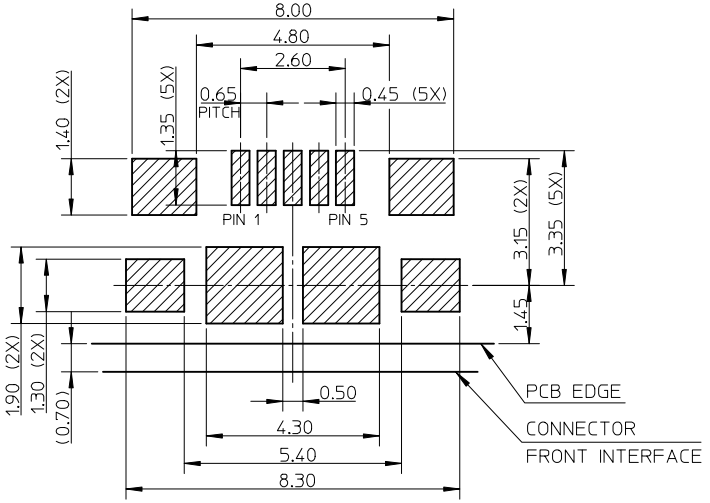

RECOMMENDED P.C.B. PATTERN LAYOUT
GENERAL TOLERANCE: ±0.05

PIN	NAME
5	GND
4	ID
3	D+
2	D-
1	VBUS

PIN ASSIGNMENT

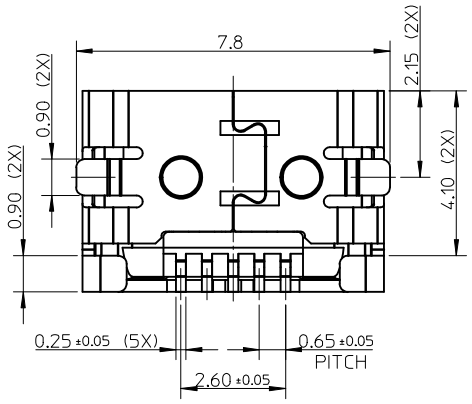

ADD PIN ASSIGNMENT
EC NO: SH2014-0449 2014/04/24
DRWN:XQZHANG 2014/04/24
CH'KD:XQZHANG 2014/06/06
APPR:AYIN
DESCRIPTION
B
REV

QUALITY SYMBOLS
FA=0
FC=0
FP=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.15	± ---
1 PLACE	± 0.25	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


		DATE
DRAWN BY	XQZHANG	2013/11/08
CHECKED BY	XQZHANG	2013/11/08
APPROVED BY	AYIN	2013/11/25


TITLE: SALES DRAWING FOR USB MICRO-B, BOTTOM MOUNT FLANGELESS TYPE

molex

MATERIAL NO.: 47346-1015
DOCUMENT NO.: SD-47346-115
SHEET NO.: 1 OF 1
SIZE: A3


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

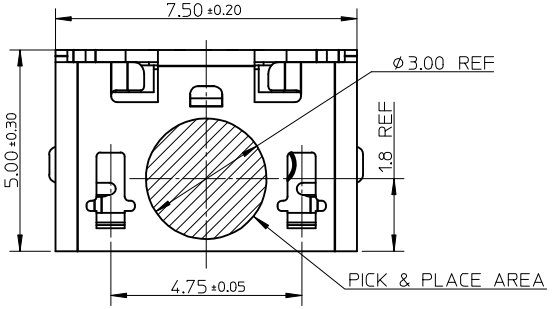


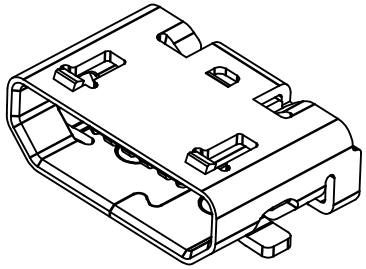


NOTES:

1. MATERIAL:
   HOUSING: LCP, BLACK, UL94V-0;
   TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
   SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.
2. PLATING:
   TERMINAL:
   CONTACT AREA: GOLD FLASH OVER 0.75 MICRON MINIMUM Pd/Ni;
   SOLDER TAIL AREA: GOLD FLASH;
   UNDER PLATING: NICKEL 2.0MICRON MINIMUM.
   SHELL:
   MATTE TIN 2.0MICRON MINIMUM;
   UNDER PLATING: NICKEL 1.27MICRON MINIMUM.
3. TAIL & NAIL COPLANARITY 0.08mm MAXIMUM.
4. PRODUCT SPECIFICATION: PS-47642-001.
5. PACKAGE SPECIFICATION: PK-47346-002.
6. COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV 2000/53/EC.

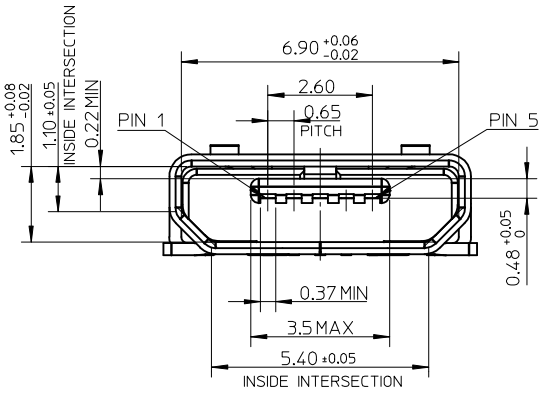




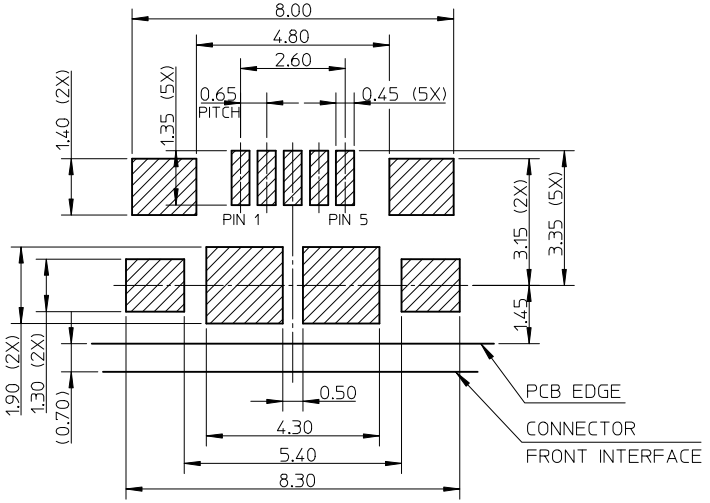

RECOMMENDED P.C.B. PATTERN LAYOUT
GENERAL TOLERANCE: ±0.05

PIN	NAME
5	GND
4	ID
3	D+
2	D-
1	VBUS

PIN ASSIGNMENT

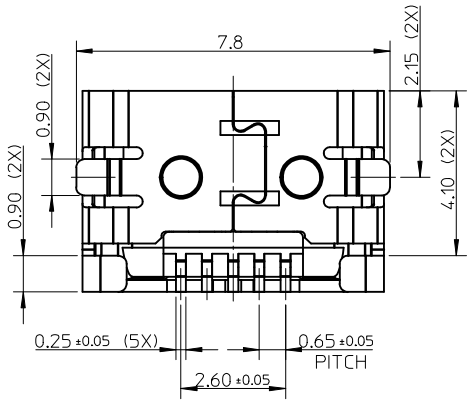

ADD PIN ASSIGNMENT
EC NO: SH2014-0449 2014/04/24
DRWN:XQZHANG 2014/04/24
CH'KD:XQZHANG 2014/06/06
APPR:AYIN
DESCRIPTION
B
REV

QUALITY SYMBOLS
FA=0
FC=0
FP=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.15	± ---
1 PLACE	± 0.25	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	XQZHANG	2013/11/08
CHECKED BY	XQZHANG	2013/11/08
APPROVED BY	AYIN	2013/11/25

TITLE: SALES DRAWING FOR USB MICRO-B, BOTTOM MOUNT FLANGELESS TYPE

molex

MATERIAL NO.: 47346-1015
DOCUMENT NO.: SD-47346-115
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

502584-1060 347928042 502380-0800 349672001 502584-0870 194290039 347072012 347910140 528061110 464373005 0194360214 194290026 197134001 348242245 351820290 459850483 502585-0370 503988100 0351510214 194270031 357470310 528520870 528523070 0464363133 0477256010 197054301 34708-2028 348268126 355240920 5023860371