


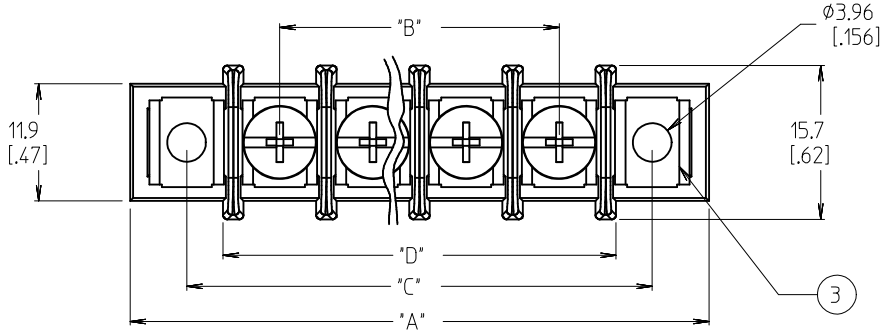


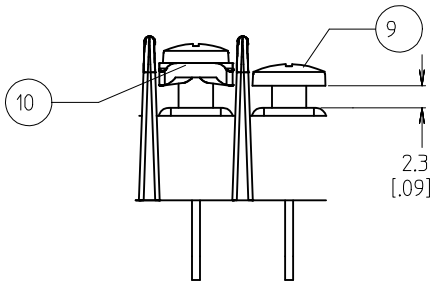



WIRE READY SPEC. (OPTION -47)
(FOR OPTIONAL SCREW -50
AND STANDARD SCREW.)

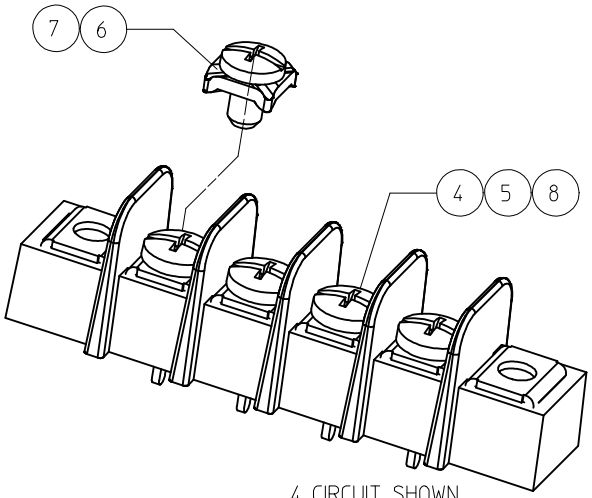

4 CIRCUIT SHOWN

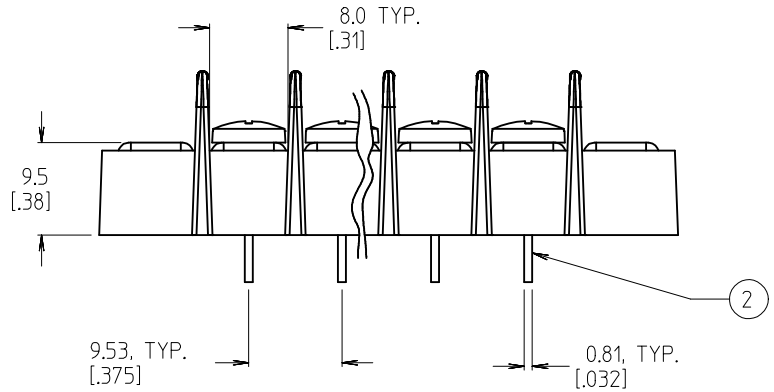

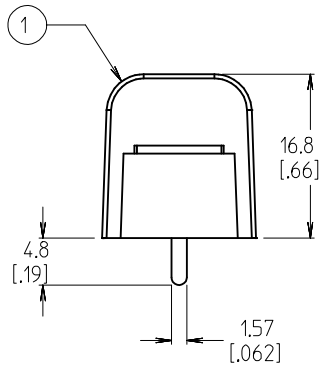

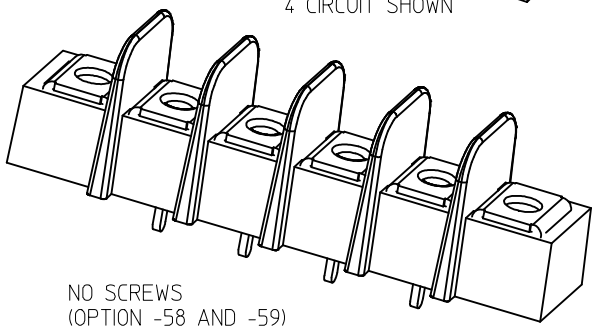

NO SCREWS
(OPTION -58 AND -59)
4 CIRCUIT SHOWN

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. INCH DIMENSIONS ARE IN BRACKETS [XXX].
4. REFER TO SD-38120-001 FOR IMPRINTING OPTIONS 10A AND 11A.
5. REFER TO SD-38120-007 FOR IMPRINTING OPTION 12A.
6. "XX" REFERS TO THE QUANTITY OF CIRCUITS.
7. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
10	XX	#6-32 WRDY W/WASH SCR (-47,-50)	STEEL	ZN, CLEAR CHROMATE
9	XX	#6-32 PH/SLOT WRDY SCR (OPT -47)	STEEL	ZN, CLEAR CHROMATE
8	XX	#6-32 BHD, PH-SL SCREW (OPT -56)	STAINLESS STEEL	PASSIVATE
7	XX	#6-32 PH/SL W/WASH SCR (-49,-50)	BRASS	NICKEL
6	XX	#6-32 PH/SL W/WASH SCR (OPT -50)	STEEL	ZN, CLEAR CHROMATE
5	XX	#6-32 PH/SLOTTED SCREW (OPT -49)	BRASS	NICKEL
4	XX	#6-32 PH/SLOTTED SCREW (STD)	STEEL	ZN, CLEAR CHROMATE
3	2	MOUNTING PLATE	BRASS	NICKEL
2	XX	TERMINAL	BRASS	BRT.TIN/CU
1	1	INSULATOR, SINGLE ROW	PBT	BLACK

ADD 387291663 SEE SHT 2
EC NO: IPG2015-0783 2014/10/27
DRWN:RSTONE 10/29/2014
CH'KD:B RUPERT 2014/11/02
APPR:BWOODMAN
DESCRIPTION
REV D

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 2:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: W. HOWARD DATE: 2003/10/16
CHECKED BY: R. KEMP DATE: 2003/10/16
APPROVED BY: P. WALTZ DATE: 2003/10/16

TITLE: 9.53MM [.375"] SR BTS, PC ASSY


MOLEX INCORPORATED

MATERIAL NO.: SEE SHT. 2
DOCUMENT NO.: SD-38720-001
SHEET NO.: 1 OF 2
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

NUMBER OF CIRCUITS "XX"	MATERIAL NO. (OPT 12A)	MATERIAL NO. (OPT 11A)	MATERIAL NO. (OPT 10A)	MATERIAL NO. (OPT -59)	MATERIAL NO. (OPT -58)	MATERIAL NO. (OPT -56)	MATERIAL NO. (OPT -50)	MATERIAL NO. (OPT -49,-50)	MATERIAL NO. (OPT -49)	MATERIAL NO. (OPT -47,-50)	MATERIAL NO. (STD)
01						38729-0659					38720-6201
02			38729-1039		38729-0750	38729-0791	38720-7402	38729-1381	38720-6802		38720-6202
03	38729-0872	38729-0025	38729-0014			38729-0117	38720-7403		38720-6803	38720-8603	38720-6203
04			38729-0940	38729-0945		38729-0839	38720-7404	38729-1159	38720-6804		38720-6204
05	38729-0256		38729-0346			38729-1253	38720-7405	38729-1382	38720-6805		38720-6205
06				38729-0400	38729-0386	38729-0980	38720-7406	38729-1383	38720-6806		38720-6206
07			38729-0423	38729-0407	38729-0435	38729-0440	38720-7407		38720-6807		38720-6207
08	38729-0497				38729-0508	38729-0532	38720-7408		38720-6808		38720-6208
09			38729-0548		38729-0560		38720-7409		38720-6809		38720-6209
10			38729-1011	38729-0598	38729-0598	38729-1663 (D)	38720-7410		38720-6810		38720-6210
11						38729-1252	38720-7411				38720-6211
12			38729-0720			38729-0735	38720-7412		38720-6812		38720-6212
13					38729-0809		38720-7413				38720-6213
14					38729-0004		38720-7414		38720-6814		38720-6214
15											38720-6215
16											38720-6216
17											38720-6217
18											38720-6218
19											38720-6219
20											38720-6220
21											38720-6221
22											38720-6222
23											38720-6223
24											38720-6224
25											38720-6225
26											38720-6226

NUMBER OF CIRCUITS "XX"	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"
01	30.7 [1.21]	- -	19.1 [.75]	11.6 [.46]
02	40.1 [1.58]	9.53 [.375]	28.6 [1.13]	21.1 [.83]
03	49.7 [1.96]	19.05 [.750]	38.1 [1.50]	30.6 [1.21]
04	59.2 [2.33]	28.58 [1.125]	47.6 [1.88]	40.1 [1.58]
05	68.7 [2.71]	38.10 [1.500]	57.2 [2.25]	49.7 [1.96]
06	78.2 [3.08]	47.63 [1.875]	66.7 [2.63]	59.2 [2.33]
07	87.8 [3.46]	57.15 [2.250]	76.2 [3.00]	68.7 [2.71]
08	97.3 [3.83]	66.68 [2.625]	85.7 [3.38]	78.2 [3.08]
09	106.8 [4.21]	76.20 [3.000]	95.3 [3.75]	87.8 [3.46]
10	116.3 [4.58]	85.73 [3.375]	104.8 [4.13]	97.3 [3.83]
11	125.9 [4.96]	95.25 [3.750]	114.3 [4.50]	106.8 [4.21]
12	135.4 [5.33]	104.78 [4.125]	123.8 [4.88]	116.3 [4.58]
13	144.9 [5.71]	114.30 [4.500]	133.4 [5.25]	125.9 [4.96]
14	154.4 [6.08]	123.83 [4.875]	142.9 [5.63]	135.4 [5.33]
15	164.0 [6.46]	133.35 [5.250]	152.4 [6.00]	144.9 [5.71]
16	173.5 [6.83]	142.88 [5.625]	161.9 [6.38]	154.4 [6.08]
17	183.0 [7.21]	152.40 [6.000]	171.5 [6.75]	164.0 [6.46]
18	192.5 [7.58]	161.93 [6.375]	181.0 [7.13]	173.5 [7.21]
19	202.1 [7.96]	171.45 [6.750]	190.5 [7.50]	192.5 [7.58]
20	211.6 [8.33]	180.98 [7.125]	200.0 [7.88]	202.1 [7.96]
21	221.1 [8.71]	190.50 [7.500]	209.6 [8.25]	211.6 [8.33]
22	230.6 [9.08]	200.03 [7.875]	219.1 [8.63]	221.1 [8.71]
23	240.2 [9.46]	209.55 [8.250]	228.6 [9.00]	230.6 [9.08]
24	249.7 [9.83]	219.08 [8.625]	238.1 [9.38]	230.6 [9.08]
25	259.2 [10.21]	228.60 [9.000]	247.7 [9.75]	240.2 [9.46]
26	268.7 [10.58]	238.13 [9.375]	257.2 [10.13]	249.7 [9.83]

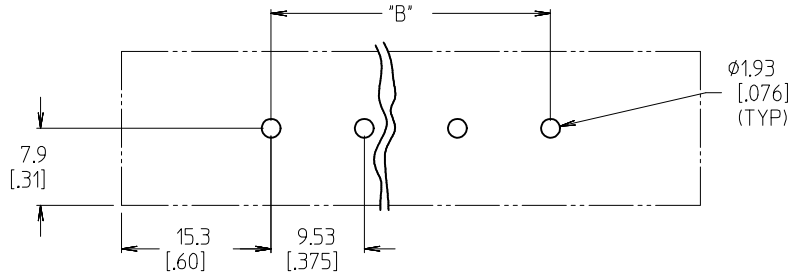

PTH PATTERN

ADD 387291663 (10P)
EC NO: IPG2015-0783 2014/10/27
DRWN:RSTONE CHK:DJB RUPERT 10/29/2014
APPR:BWOODMAN 2014/11/02
DESCRIPTION
D
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 2:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: W. HOWARD DATE: 2003/10/16
CHECKED BY: R. KEMP DATE: 2003/10/16
APPROVED BY: P. WALTZ DATE: 2003/10/16

TITLE: 9.53MM [.375"] SR BTS, PC ASSY

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-38720-001
SHEET NO.: 2 OF 2
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

347928042 528061110 0351510214 194270031 502380-0800 528523070 194290026 194290039 502585-0370 349672001 459850483 197134001 355240920 502584-1060 503988100 0477256010 197054301 34708-2028 347910140 351820290 528520870 0194360214 348242245 348268126 357470310 464373005 0464363133 347072012 5023860371 502584-0870