




DETAIL A

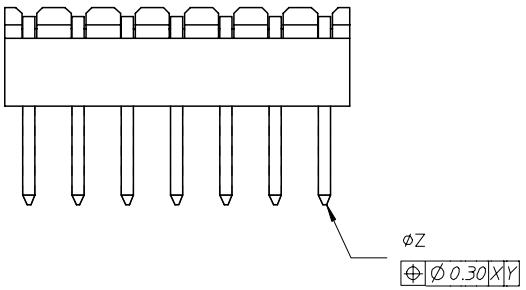


NOTES:

1. MATERIAL:
   HSG: PCT, 30% GLASS FILLED,UL 94V-0,
   COLOUR BLACK.
   PIN: 0.50MM SQ PHOSPHOR BRONZE 510
2. PLATING:
   GOLD FLASH IN CONTACT AREA,
   TIN IN SOLDERTAIL AREA, BOTH OVER
   NICKEL OVERALL
3. 14 CKT USED FOR ILLUSTRATION ONLY
4. PART TO BE PACKED IN TAPE & REEL (SEE SHT 2).
5. PRODUCT SPEC PS-87761-100 APPLIES.

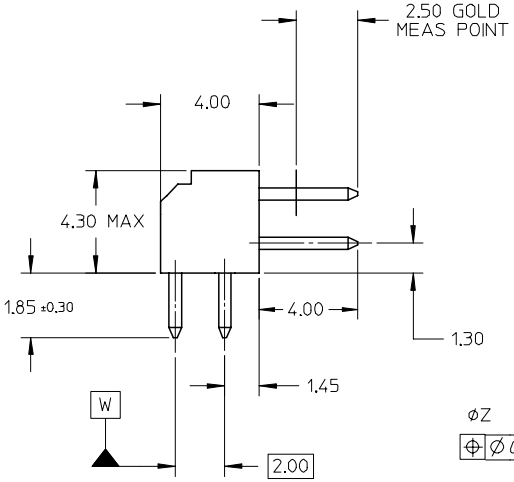

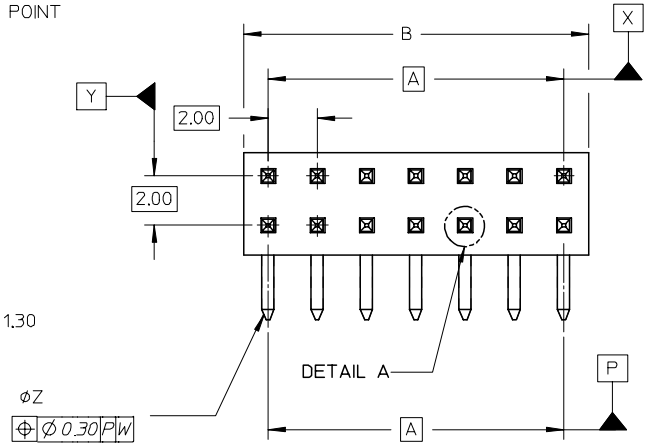

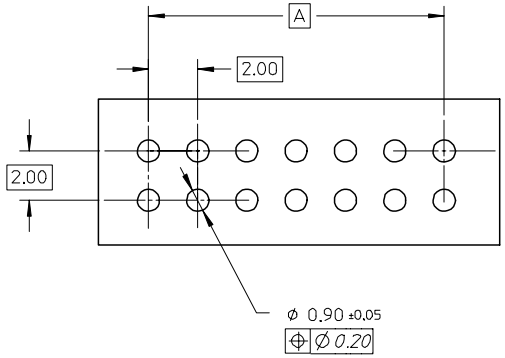

RECOMMENDED PCB LAYOUT

EC NO: S2005-0842 2005/06/01
DRWN:YLQIAO 2005/06/01
CH'KD:PTLIM 2005/06/01
APPR:SCLOW
DESCRIPTION
REV: A

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.2	± ---
1 PLACE	± ---	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	YLQIAO	DATE 2005/02/28
CHECKED BY	PTLIM	DATE 2005/06/01
APPROVED BY	SCLOW	DATE 2005/06/01

TITLE: SALES DRAWING
MGRID 2MM DUAL ROW HRD.
R/A, IN TAPE & REEL


molex MOLEX INCORPORATED


MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-87760-148
SHEET NO.: 1 OF 2

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PART NUMBER (IN TAPE/REEL)	CKT SIZE	A	B	Bo	F	So	W
87760-8011	4	2.00	4.00	4.30	7.50	-	16.00
87760-8012	10	8.00	10.00	10.40	11.50	-	24.00
87760-8013	12	10.00	12.00	12.40	11.50	-	24.00
87760-8014	14	12.00	14.00	14.40	11.50	-	24.00

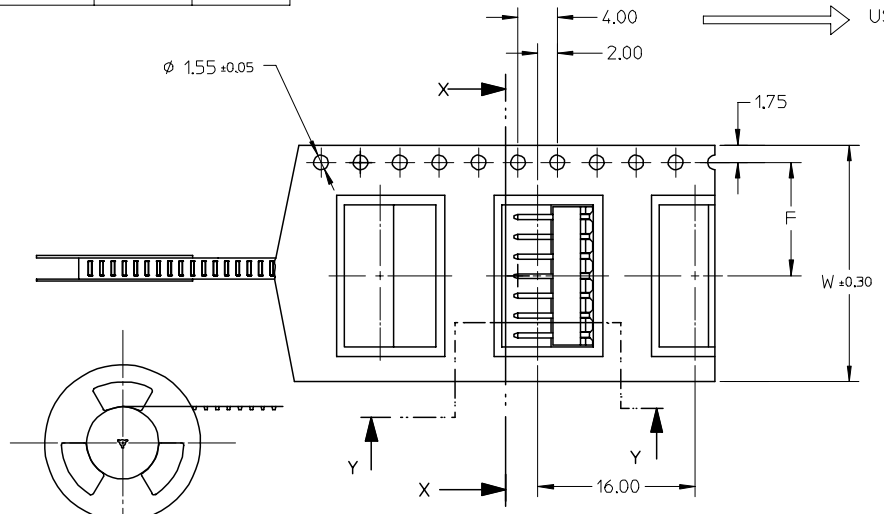





SECTION X-X

NOTES:


1. LEADER AND TRAILER TAPE

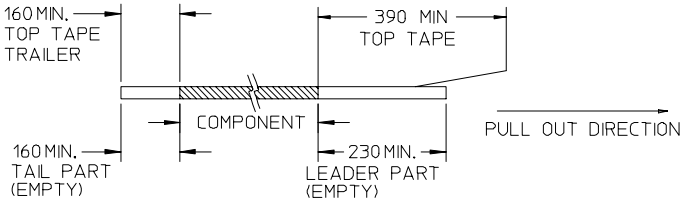



SECTION Y-Y

2. PEELING OFF FORCE OF THE TOP TAPE: 20-60gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. PACKAGING STANDARD IS AS PER EIA-481.

4. TAPE & REEL QUANTITY = 500PCS/REEL

EC NO: S2005-0842 2005/06/01
DRWN:YLQIAO 2005/06/01
CH'KD:PTLIM 2005/06/01
APPR:SCLOW
DESCRIPTION
REV
A

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.2	± ---
1 PLACE	± ---	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: YLQIAO DATE: 2005/02/28
CHECKED BY: PTLIM DATE: 2005/06/01
APPROVED BY: SCLOW DATE: 2005/06/01


TITLE: SALES DRAWING
MGRID 2MM DUAL ROW HRD.
R/A, IN TAPE & REEL

molex MOLEX INCORPORATED


MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-87760-148
SHEET NO.: 2 OF 2

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

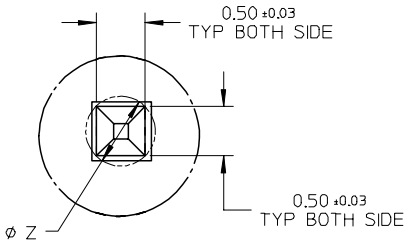



DETAIL A

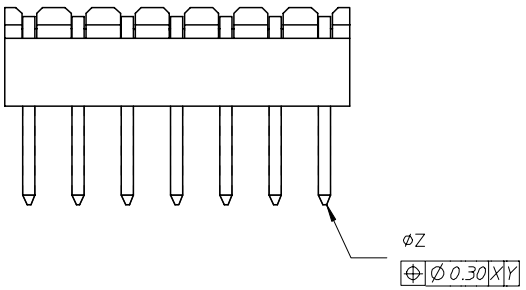


NOTES:

1. MATERIAL:
   HSG: PCT, 30% GLASS FILLED,UL 94V-0,
   COLOUR BLACK.
   PIN: 0.50MM SQ PHOSPHOR BRONZE 510
2. PLATING:
   GOLD FLASH IN CONTACT AREA,
   TIN IN SOLDERTAIL AREA, BOTH OVER
   NICKEL OVERALL
3. 14 CKT USED FOR ILLUSTRATION ONLY
4. PART TO BE PACKED IN TAPE & REEL (SEE SHT 2).
5. PRODUCT SPEC PS-87761-100 APPLIES.

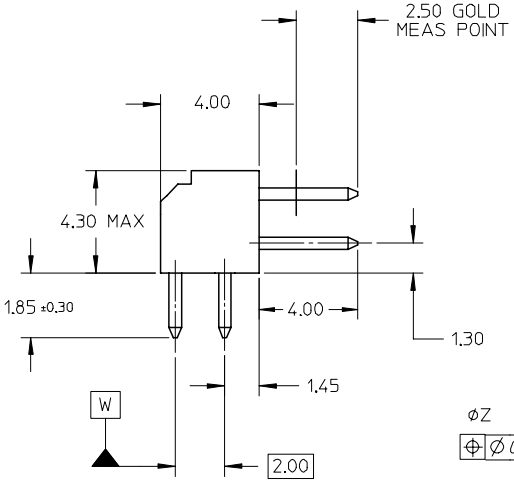

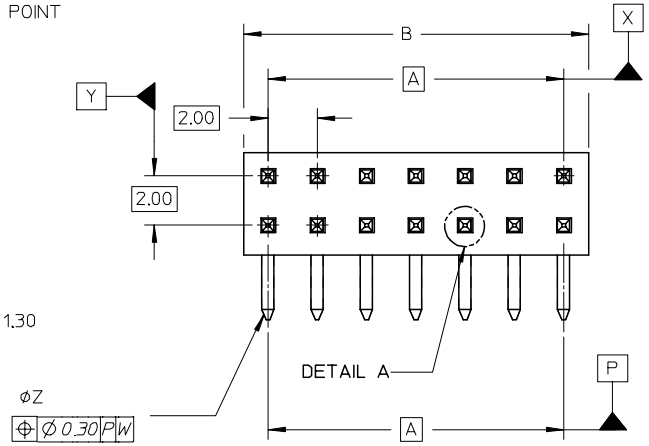

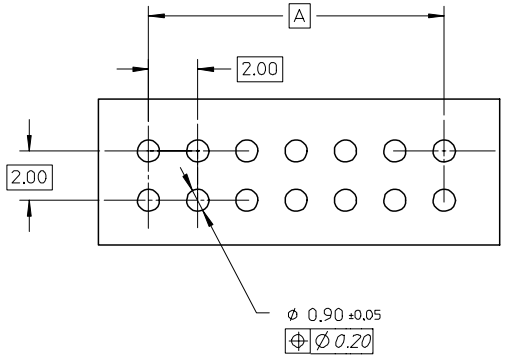

RECOMMENDED PCB LAYOUT

EC NO: S2005-0842 2005/06/01
DRWN:YLQIAO 2005/06/01
CH'KD:PTLIM 2005/06/01
APPR:SCLOW
DESCRIPTION
REV: A

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.2	± ---
1 PLACE	± ---	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	YLQIAO	DATE 2005/02/28
CHECKED BY	PTLIM	DATE 2005/06/01
APPROVED BY	SCLOW	DATE 2005/06/01

TITLE: SALES DRAWING
MGRID 2MM DUAL ROW HRD.
R/A, IN TAPE & REEL


molex MOLEX INCORPORATED


MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-87760-148
SHEET NO.: 1 OF 2

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PART NUMBER (IN TAPE/REEL)	CKT SIZE	A	B	Bo	F	So	W
87760-8011	4	2.00	4.00	4.30	7.50	-	16.00
87760-8012	10	8.00	10.00	10.40	11.50	-	24.00
87760-8013	12	10.00	12.00	12.40	11.50	-	24.00
87760-8014	14	12.00	14.00	14.40	11.50	-	24.00

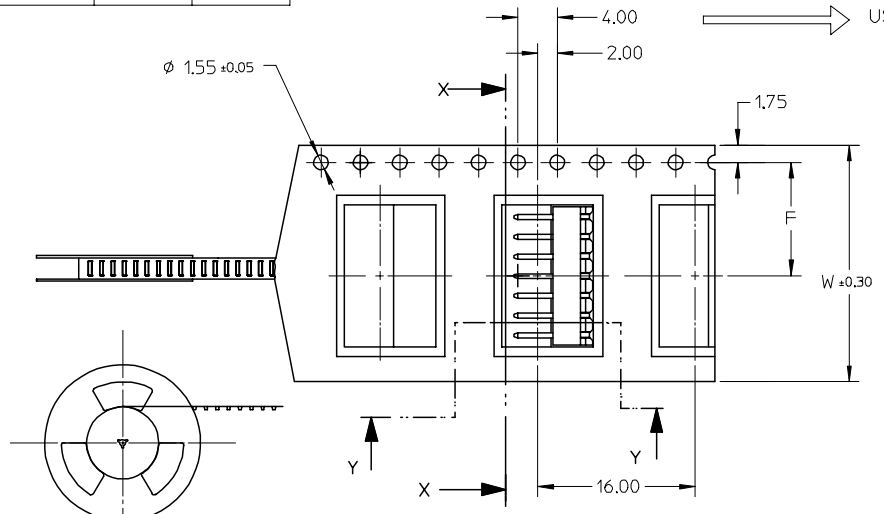





SECTION X-X

NOTES:


1. LEADER AND TRAILER TAPE

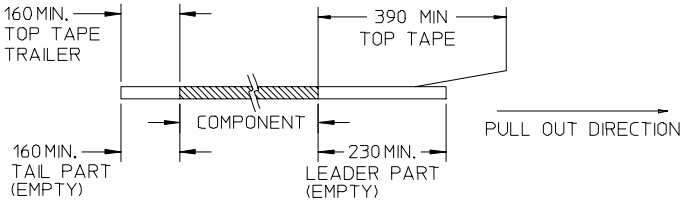



SECTION Y-Y

2. PEELING OFF FORCE OF THE TOP TAPE: 20-60gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. PACKAGING STANDARD IS AS PER EIA-481.

4. TAPE & REEL QUANTITY = 500PCS/REEL

EC NO: S2005-0842 2005/06/01
DRWN:YLQIAO 2005/06/01
CH'KD:PTLIM 2005/06/01
APPR:SCLOW
DESCRIPTION
REV
A

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.2	± ---
1 PLACE	± ---	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: YLQIAO DATE: 2005/02/28
CHECKED BY: PTLIM DATE: 2005/06/01
APPROVED BY: SCLOW DATE: 2005/06/01

TITLE: SALES DRAWING
MGRID 2MM DUAL ROW HRD.
R/A, IN TAPE & REEL

molex MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-87760-148
SHEET NO.: 2 OF 2

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

0190690033 398800403 447641402 5046940301 190730231 0436802002 152660117 430450225
436803002 444280402 190670071 417920538 430451220 447642001 459705185 190690096 152670357
447691602 760475001 439151216 0190700155 0436400901 152670269 190990009 190990010
397730002 759001161 151660057 151670255 152670251