


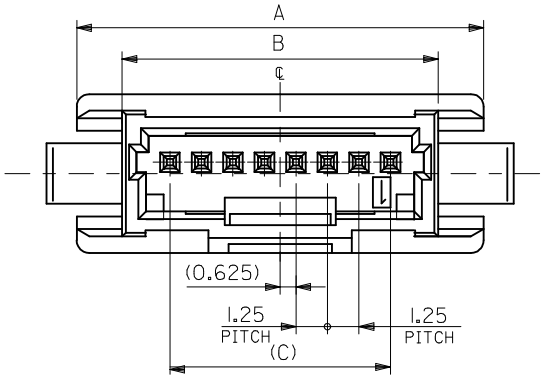


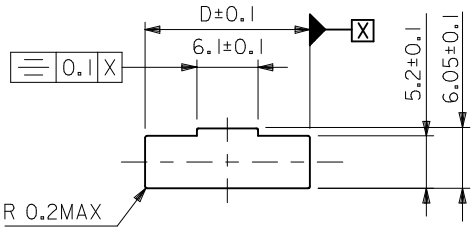



推奨パネル加工寸法(SCALE:2-1)
RECOMMENDED PANEL CUT DIMENSION

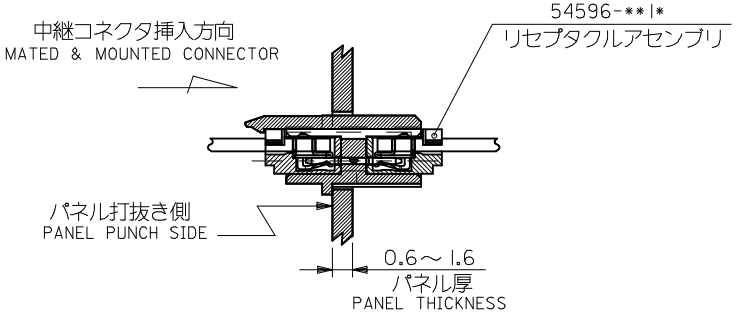


嵌合状態図
MATED & MOUNTED CONNECTOR

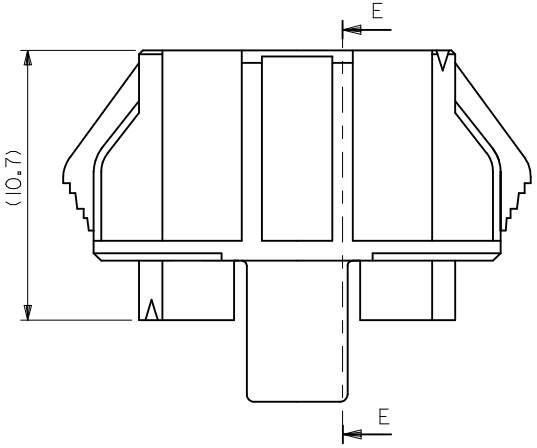

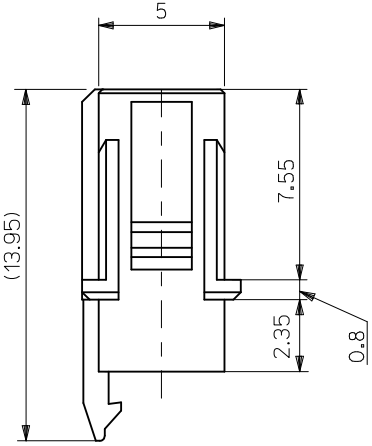

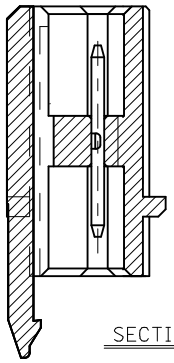

SECTION E-E

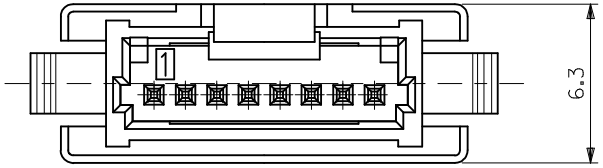

注記 NOTES

1. 材質 MATERIAL
   ウエハー：ポリアミド、UL94-V0、ナチュラル色
   WAFER:PA,UL94-V0,COLOR NATURAL
   ピン：黄銅、銅下地　錫メッキ
   PIN:BRASS,PRE-TINNED
2. 嵌合相手 MATE WITH
   リセプタクルアセンブリ：54596－＊＊1＊
   REC,ASS'Y:54596-**1*
   ピン：リン青銅、錫メッキ
   PIN:PHOSPHOR BRONZE,PRE-TINNED
3. 本製品は 55482-**10 の鉛フリー品である。
   THIS PRODUCT IS LEAD FREE OF 55482-**10.
4. ELV AND RoHS COMPLIANT.

31.35	23.75	27.55	31.15	55482-2019	20
30.1	22.5	26.3	29.9	55482-1919	19
28.85	21.25	25.05	28.65	55482-1819	18
27.6	20	23.8	27.4	55482-1719	17
26.35	18.75	22.55	26.15	55482-1619	16
25.1	17.5	21.3	24.9	55482-1519	15
23.85	16.25	20.05	23.65	55482-1419	14
22.6	15	18.8	22.4	55482-1319	13
21.35	13.75	17.55	21.15	55482-1219	12
20.1	12.5	16.3	19.9	55482-1119	11
18.85	11.25	15.05	18.65	55482-1019	10
17.6	10	13.8	17.4	55482-0919	9
16.35	8.75	12.55	16.15	55482-0819	8
15.1	7.5	11.3	14.9	55482-0719	7
13.85	6.25	10.05	13.65	55482-0619	6
12.6	5	8.8	12.4	55482-0519	5
11.35	3.75	7.55	11.15	55482-0419	4
10.1	2.5	6.3	9.9	55482-0319	3
8.85	1.25	5.05	8.65	55482-0219	2
D	C	B	A	TRAY	CIRCUITS
55482-**19		MODEL NO.		ORDER NO. オーダー番号	

REVISED
EC NO: J2010-0170 2009/07/27
DRWN:TKON 2009/07/28
CH'KD:KASAKAWA
APPR:NUKITA 2009/07/29
DESCRIPTION
A
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: 5:1	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION

DRAWN BY: Y.SAKIYAMA	DATE: 04/05/10
CHECKED BY: M.SASAO	DATE: 04/05/10
APPROVED BY: M.SASAO	DATE: 04/05/10
MATERIAL NO.: SEE TABLE	
DOCUMENT NO.: SD-55482-004	SHEET NO.: 1 OF 1

TITLE: MINI MI2 1-ROW RELAY WAFER ASSY -LEAD FREE-

MOLEX INCORPORATED

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

439151216 447691602 459705185 152670357 190990009 430451220 444280402 0436400901
151660057 152670251 151670255 190990010 447641402 447642001 397730002 417920538 430450225
436803002 759001161 760475001 0190700155 0436802002 190670071 190730231 398800403
5046940301 190690096 0190690033 152660117 152670269