
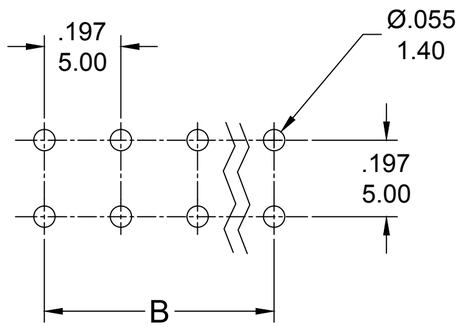


PCB LAYOUT

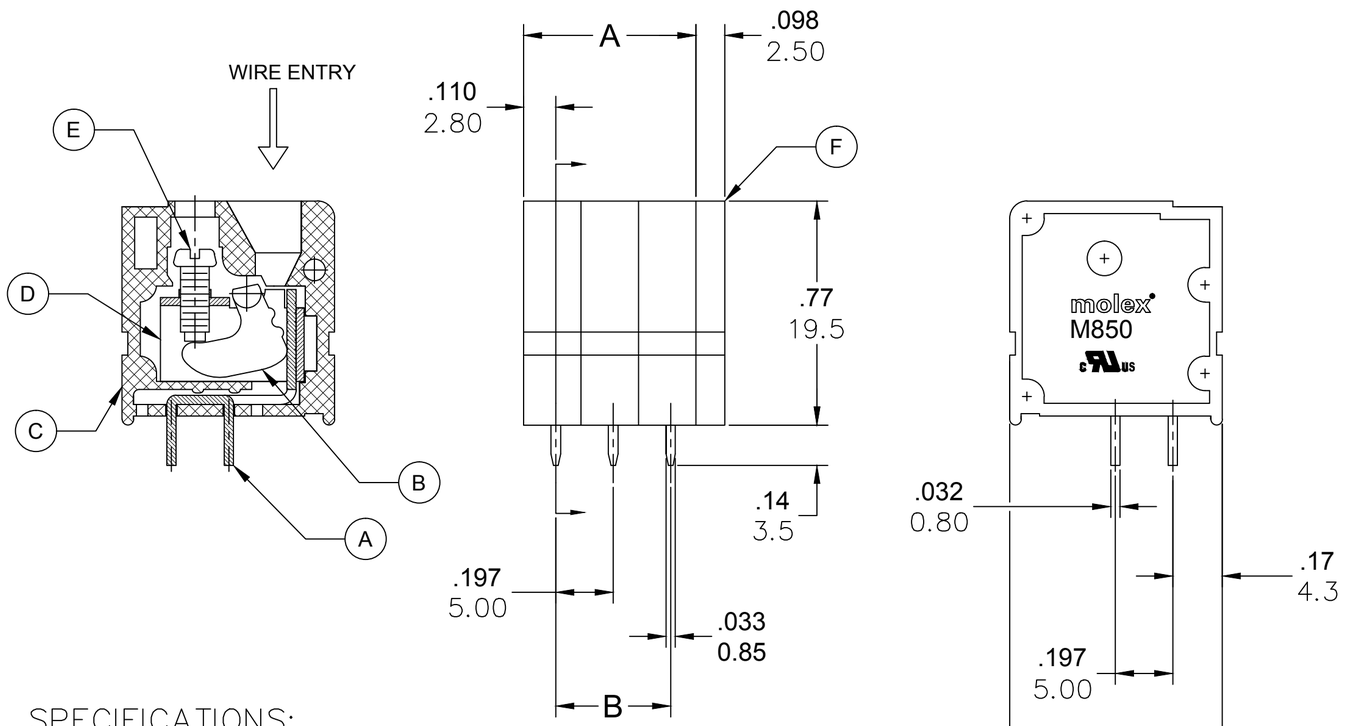


PART NUMBER DATA

CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN	mm	B IN	mm
1	397440001	M850-01-1-01-3	GREEN	.20	5.0	.000	.00
2	397440002	M850-01-1-02-3	GREEN	.39	10.0	.197	5.00
3	397440003	M850-01-1-03-3	GREEN	.59	15.0	.394	10.00
4	397440004	M850-01-1-04-3	GREEN	.79	20.0	.591	15.00
5	397440005	M850-01-1-05-3	GREEN	.98	25.0	.787	20.00
6	397440006	M850-01-1-06-3	GREEN	1.18	30.0	.984	25.00
7	397440007	M850-01-1-07-3	GREEN	1.38	35.0	1.181	30.00
8	397440008	M850-01-1-08-3	GREEN	1.57	40.0	1.378	35.00
9	397440009	M850-01-1-09-3	GREEN	1.77	45.0	1.575	40.00
10	397440010	M850-01-1-10-3	GREEN	1.97	50.0	1.772	45.00
11	397440011	M850-01-1-11-3	GREEN	2.17	55.0	1.969	50.00
12	397440012	M850-01-1-12-3	GREEN	2.36	60.0	2.165	55.00
13		M850-01-1-13-3	GREEN	2.56	65.0	2.362	60.00
14		M850-01-1-14-3	GREEN	2.76	70.0	2.559	65.00
15		M850-01-1-15-3	GREEN	2.95	75.0	2.756	70.00
16		M850-01-1-16-3	GREEN	3.15	80.0	2.953	75.00
17		M850-01-1-17-3	GREEN	3.35	85.0	3.150	80.00
18		M850-01-1-18-3	GREEN	3.54	90.0	3.346	85.00
19		M850-01-1-19-3	GREEN	3.74	95.0	3.543	90.00
20		M850-01-1-20-3	GREEN	3.94	100.0	3.740	95.00
21		M850-01-1-21-3	GREEN	4.13	105.0	3.937	100.00
22		M850-01-1-22-3	GREEN	4.33	110.0	4.134	105.00
23		M850-01-1-23-3	GREEN	4.53	115.0	4.331	110.00
24		M850-01-1-24-3	GREEN	4.72	120.0	4.528	115.00

REF. LAST 2 DIGITS OF PART NUMBER EQUAL CIRCUIT COUNT

ENGINEERING NUMBER LEGEND

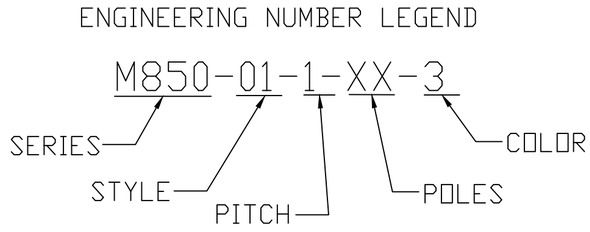

CONTACT FACTORY FOR OPTIONAL COLORS

SPECIFICATIONS:

1. MATERIAL:
   - A. TERMINAL: BRASS, TIN PLATED
   - B. CAM: STEEL, ZINC PLATED
   - C. BODY: PA66, UL94 V-0
   - D. CAGE: STEEL, ZINC PLATED
   - E. SCREW: M2.5, STEEL, ZINC PLATED
   - F. COVER: PA66, UL94 V-0
2. RATING: 300V, 20A
3. MAX TORQUE: 4.4 LBF. IN
4. WIRE RANGE: 30-12 AWG
5. WIRE STRIP: .39 (10.0MM)
6. DIELECTRIC VOLTAGE WITHSTAND: AC 2500V FOR 1 MINUTE
7. INSULATION RESISTANCE: DC 500V, 500MΩ
8. RATED IMPULSE VOLTAGE: 4000V PLUS AND MINUS 5 TIMES EACH
9. OPERATING TEMPERATURE: -40°C TO +105°C
10. MAX SOLDERING TEMP: +260°C (500°F) FOR 5 SECONDS
11. DIMS SHOWN ARE FOR REFERENCE ONLY

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	.24-1.18	±.016
>30-120	±0.50	1.18-4.76	±.020
>120	±0.80	>4.76	±.031

REVISED DOC TOL 4/6/17 ---
EC NO: IPG2017-0881
DRWN: ABENJAMI
CH'KD: ---
APPR: BRUPERT 2014/10/16
DESCRIPTION
REV
A1

QUALITY SYMBOL
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±---
1 PLACE	±---	±---

ANGULAR ±---°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: RSTONE DATE: 2014/06/30
CHECKED BY: ---- DATE: ----
APPROVED BY: JFMURPHY DATE: 2014/10/16

TITLE: TERM BLOCK, VERTICAL MODULAR, BOX 5.0MM

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-39744-001
SHEET NO.: 1 0F 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

34708-2028 348268126 355240920 0464363133 0477256010 347072012 349672001 351820290 503988100 194290026 197054301 347928042 348242245 528061110 347910140 459850483 502584-1060 0194360214 194290039 464373005 502585-0370 0351510214 194270031 357470310 5023860371 197134001 502380-0800 502584-0870 528520870 528523070