



	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.06	阿树

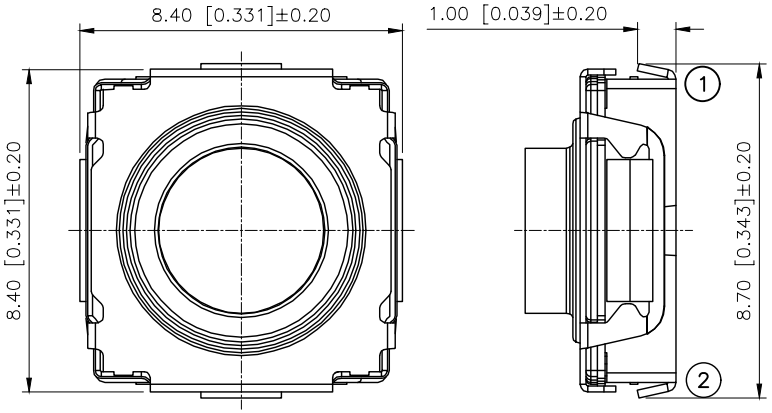







Specifications:
Voltage rating: 16 V AC / DC
Current rating: 50mA AC / DC
Withstanding voltage: 250V AC/minute
Temperature range: −40°C~+90°C
Insulation resistance: 1000MΩ Min
Operating force: 1000gf+300gf
Life: 200,000cycles
Protection grade: IP54
Stroke: 0.90mm+0.30mm

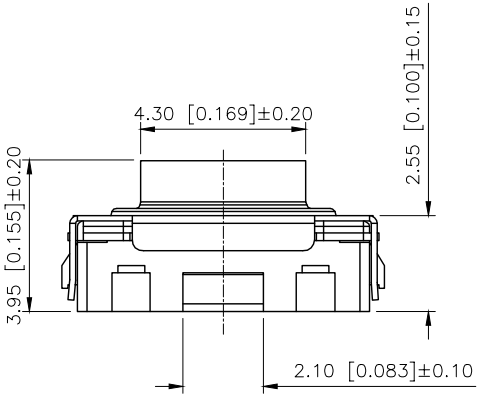

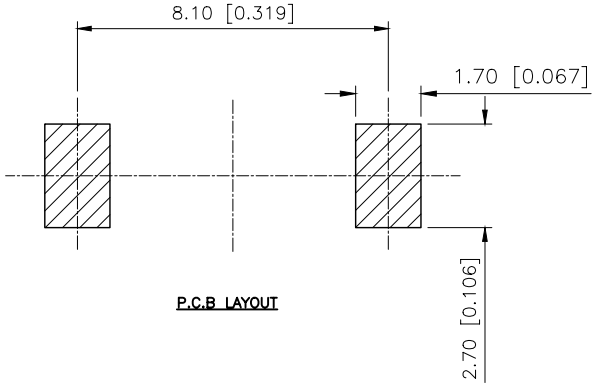

P.C.B LAYOUT



CIRCUIT DIAGRAM

TS−8484 −H −Y
E:400gf±80gf
H:700gf±200gf
K:1000gf±300gf
G:Green
Y:Yellow
BL:Blue

ITEM	PAPT NAMF	QTY	Material	Remark
5	Button	1	Silica gel	Green(400gf)/Yellow(700gf) /Bule (1000gf)
4	Ironclad	1	SUS304	−
3	Contact	1/2/3	SUS301	−
2	Base	1	LCP	Black
1	terminal	2	Brass	Silver plating

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星坤

DESIGN	阿树	VIEW:	MODEL TYPE: TACT SWITCH
CHECKED		UNIT: mm/in	PART NO.: TS−8484 −H −Y
APPROVED		SIZE: A4	DWG NO.: TS−8484 −H −Y

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	

www.helloxkb.com www.helloxkb.cn www.xk−dg.cn