
MALE PROTECTIVE CAP WITH CHAIN

R161.853.000

SERIES N

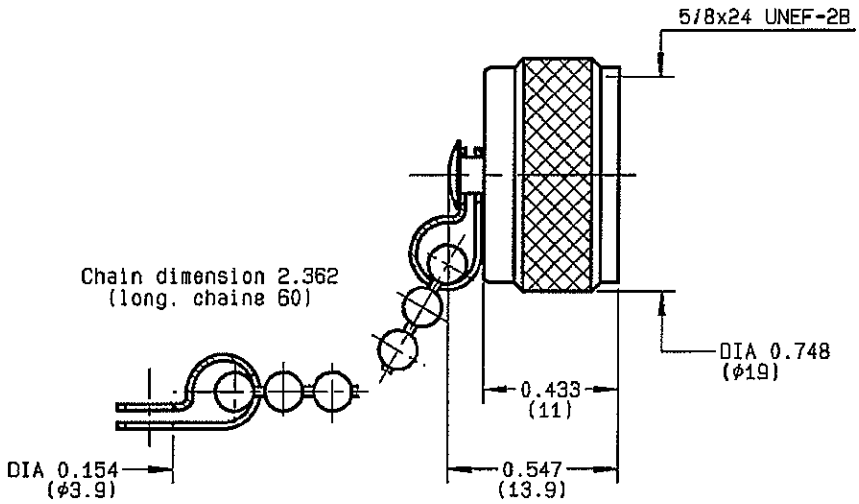

NOMINAL IMPEDANCE	**NA**	Ω
FREQUENCY RANGE	**NA**	GHz
TEMPERATURE RATING	**-55/+155**	°C
V.S.W.R	**NA** +	x F(GHz)Maxi
RF INSERTION LOSS	**NA** √F(GHz)	dB Maxi
VOLTAGE RATING	**NA**	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	**NA**	Veff Mini
INSULATION RESISTANCE	**NA**	MΩMini
HERMETIC SEAL	**NA**	$Atm.cm^3/s$
LEAKAGE (pressurized only)	**NA**	
MECHANICAL DURABILITY	**500**	Cycles
WEIGHT	11.07	gr
SPECIFICATION		

CABLES :

OTHERS CHARACTERISTICS

CABLE RETENTION	**NA**	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	**NA**	N Mini
Axial force - opposite end	**NA**	N Mini
Torque	**NA**	cm.N Mini
RECOMMENDED TORQUES		
Mating	**130**	cm.N
Panel nut	**NA**	cm.N
Clamp nut	**NA**	cm.N

CONNECTOR PARTS	MATERIALS	FINISH (all values are given in micrometers)
BODY	BRASS	BBR 2
OUTER CONTACT		
CENTER CONTACT		
INSULATOR		-
GASKET	CHLOROPRENE	-
OTHERS PIECES	BRASS	BBR 2

BONOMINI

ISSUE	CREATION DATE	FILE PART-NUMBER
0518 C	17/06/1993	

RADIALL®

The information given here is subject to change without notice.
Design changes may be in order to improve the product .

Connect to the future

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:
R161853000