CUI Devices is now Same Sky! Learn More

MODEL: SJ-3541A-TR-67 | DESCRIPTION: AUDIO JACK

FEATURES

- IP67 waterproof
- low profile
- mounting tab



SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated input voltage			12		Vdc
rated input current				1	A
contact resistance[1]	between terminal and mating plug between terminal in a closed circuit			50 30	mΩ mΩ
insulation resistance	at 500 Vdc	100			MΩ
voltage withstand	for 1 minute			500	Vac
insertion/withdrawal force		0.3		3	kg
operating temperature		-25		85	°C
life	at a rate of 24 cycles/minute		5,000		cycles
flammability rating	UL94V-0				
RoHS	yes				
IP level	IP67				

Note: 1. When measured at a current of less than 100 mA/1 kHz
2. All specifications measured at 10~35°C, humidity at 45~85%, under standard atmospheric pressure, unless otherwise noted.

SOLDERABILITY


parameter	conditions/description	min	typ	max	units
reel storage	at relative humidity <80%			40	°C
wave soldering	dipped in solder pot for 5 ± 0.5 seconds	255	260	265	°C


DISCONTINUED


MECHANICAL DRAWING


units: mm
tolerance:
X.X ±0.2 mm
X.XX ±0.10 mm
X.XXX ±0.050 mm
PCB: ±0.05 mm


	MATERIAL	PLATING
terminal 1	copper alloy	gold
terminal 2	copper alloy	gold
terminal 3	copper alloy	gold
terminal 4	copper alloy	gold
terminal 5	copper alloy	gold
support	brass	silver
insulator	PA66	
o-ring (OR-30)	silicone	



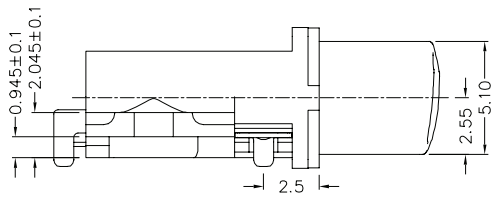


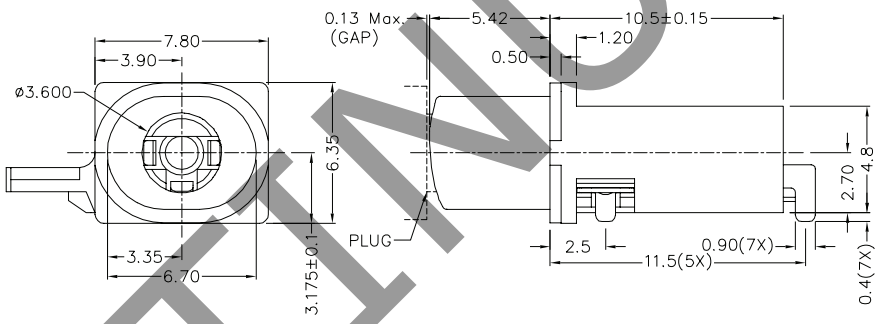

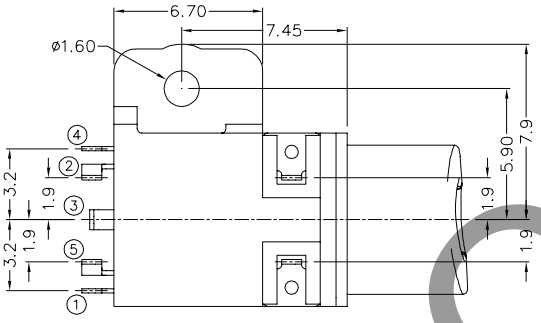


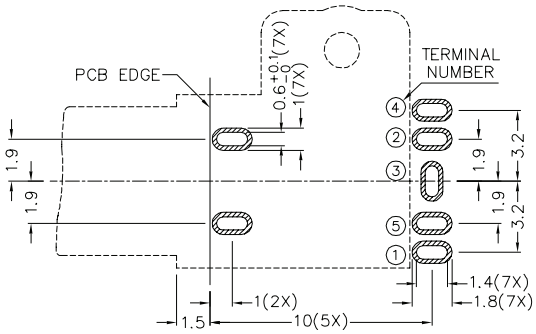


Recommended PCB Layout
Top View



Ø3.5 MATING PLUG


Schematic	
PIN	
1	sleeve
2	tip
3	ring 1
4	ring 2
5	tip


O-ring (P/N: OR-30)

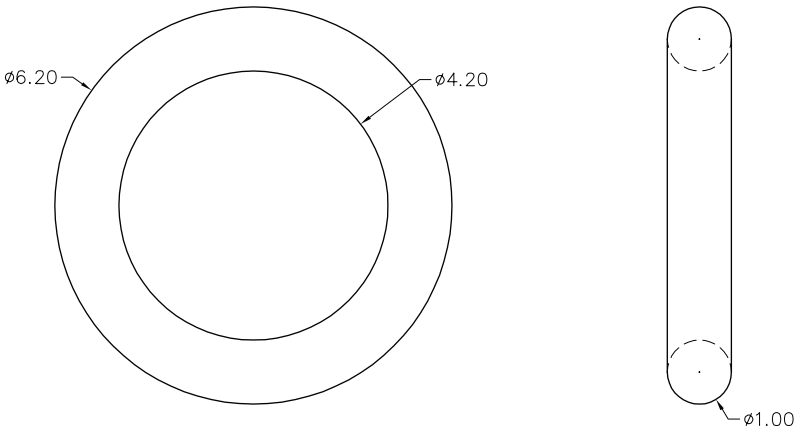



DISCONTINUED

ASSEMBLY REFERENCE

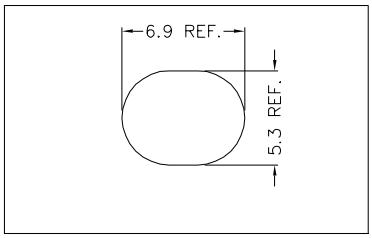

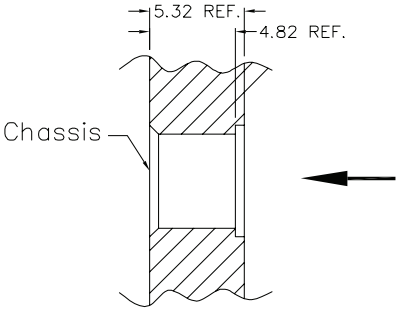

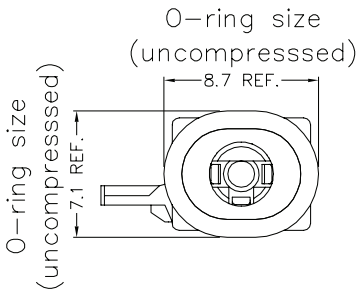

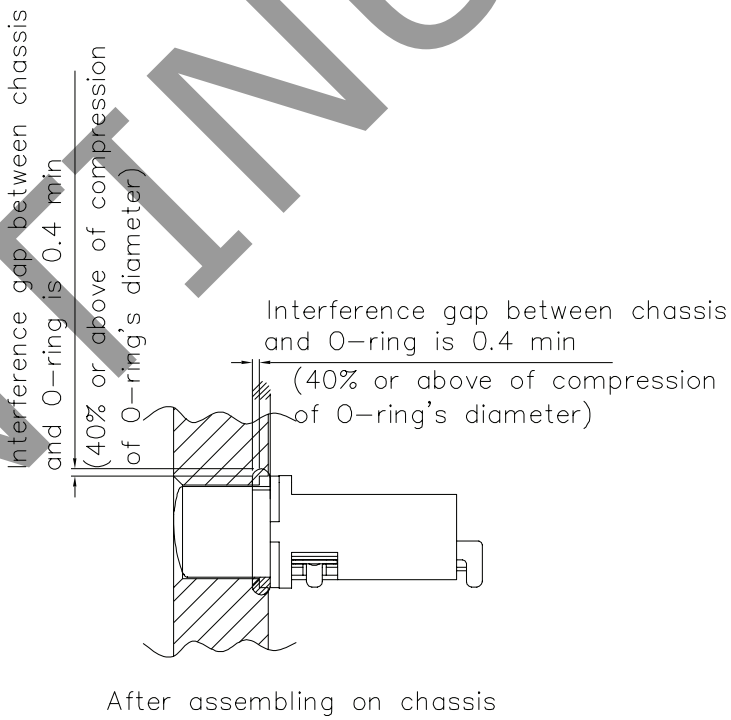



DISCONTINUED

PACKAGING

units: mm

Reel Size: Ø381 mm
Reel QTY: 800 pcs per reel

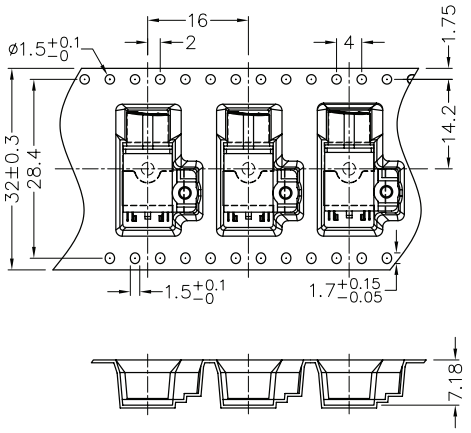

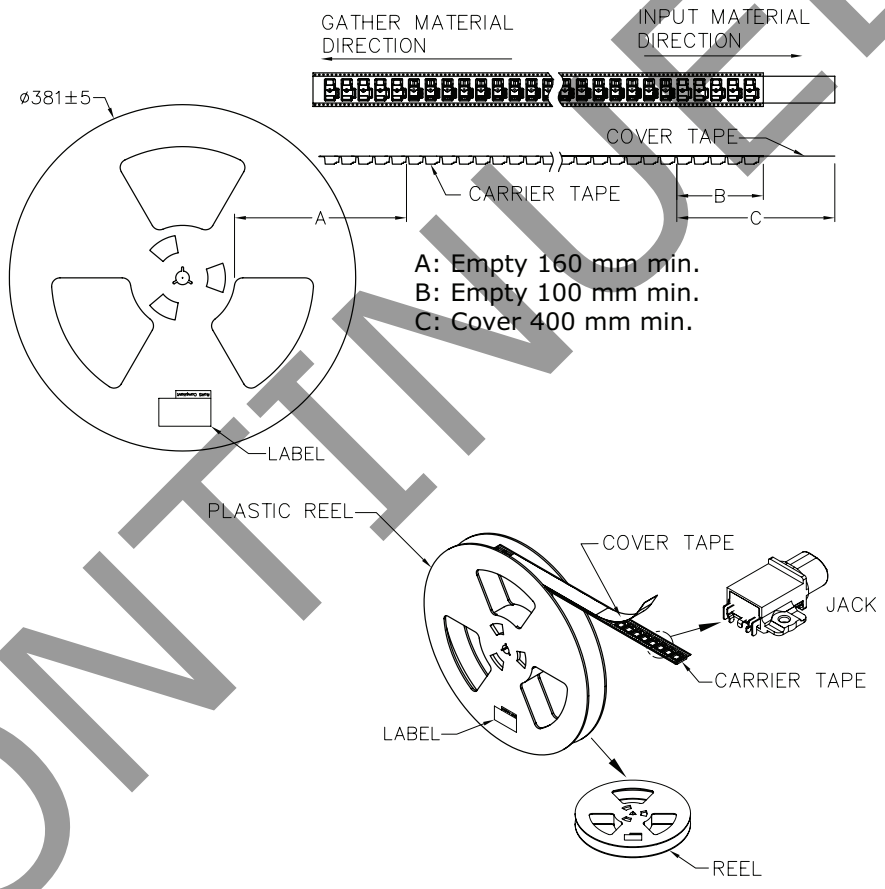

DISCONTINUED

REVISION HISTORY

rev.	description	date
1.0	initial release	08/07/2018
1.01	brand update	10/08/2019
1.02	added o-ring p/n	04/07/2022

The revision history provided is for informational purposes only and is believed to be accurate.

DISCONTINUED

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Same Sky:

TBP02P1-381-10BE CMA-4544PF-W CMC-5042PF-AC CMM-2718AT-42316-TR DS04-254-2-02BK-SMT PR4-5V-450-1A DS01C-254-S-03BE PJ-202AH CFM-A238BF-270-651 CMI-9653S-SMT-TR SJ1-3535N PJ-058AH CBT-09427-SMT-TR CFM-2507CF-0140-313 CFM-2510B-0130-275 CPI-1375IC-80T UJ32-C-H-G-L1-MSMT-TR PJ-047BH SJ-43516-SMT-TR-PI CFM-6015V-239-292-20 PJ-067B TB007-508-02BE TBL004V-508-02BE-2GY TBP01R1-508-14BE CMP-5247TF-K SJ-2523-SMT-TR CDM1222-12A-FW-F16-050-67 CPM-2H CPT-1117-83-SMT-TR HSE-B20350-NP