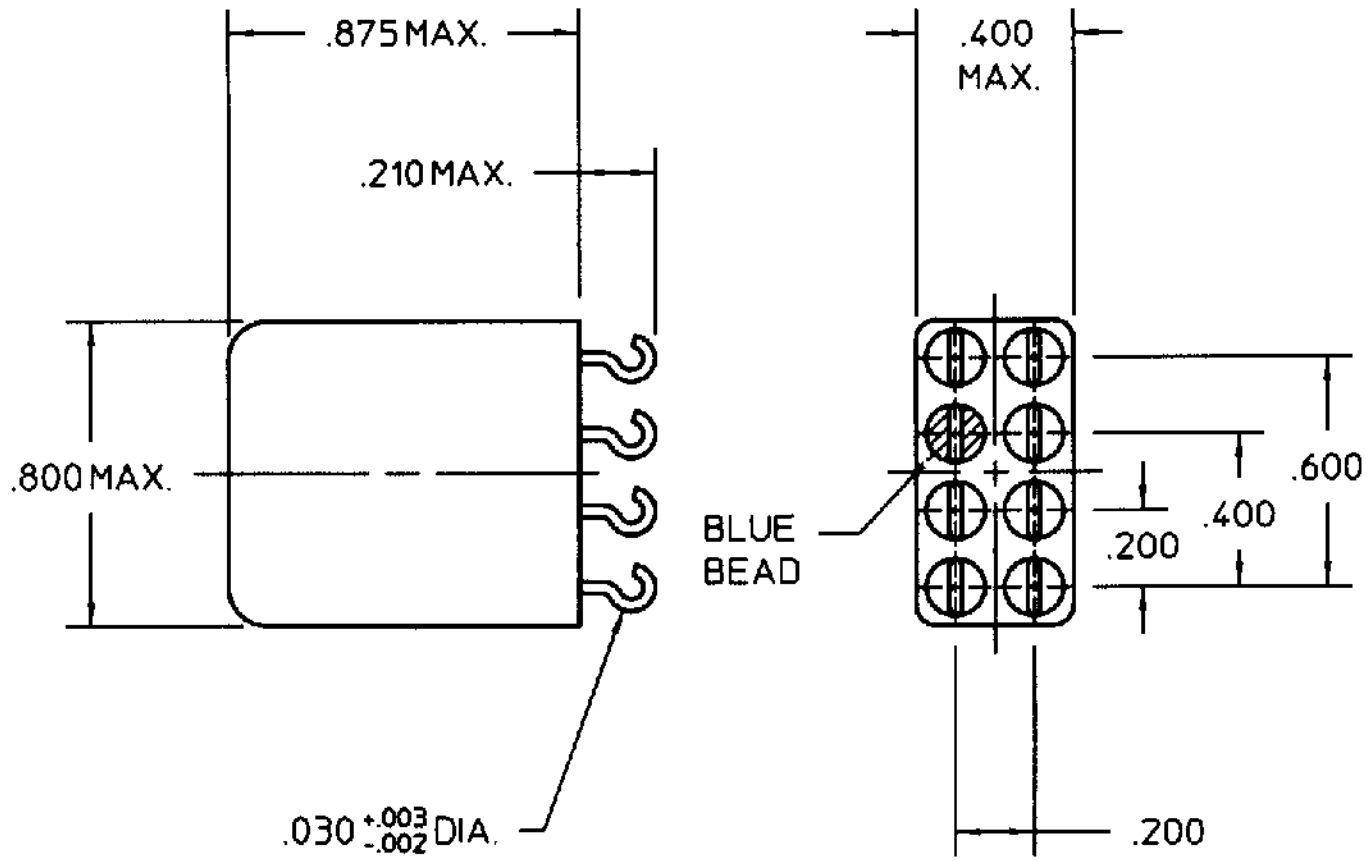


COIL: @ 25°C

RESISTANCE	9100 OHMS ± 20%
NOMINAL VOLTAGE	110 VDC
MUST OPERATE	51.0 VDC
MUST RELEASE	5.56 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

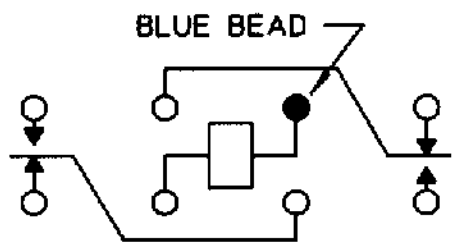

CONTACT RATING: LOW LEVEL TO 3 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/29/94 CK. 8/29/94 gmB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.
CUST. NO. _____

TYPE "FW" RELAY

RP7630G10

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-962915-1 1393431-1 3631B101LL MPT100C18RF 141991-2 2380312-2 CRGCQ2010J3K3 RH73H2A40MKTN SBCHE64R7K 175977-2 2310537-1 SBCHE154R7K 1743455-2 1903112-2 2005330-1 3-1393225-0 CPF0402B37K4E1 U5254-000005-030PA 1-794222-0 1969656-1 2-292161-3 2377783-2 3430B2F51RTDF 650075-000 917696-1 936348-1 2834055-1 ROX05SJ18R SMW73R0JT TE50BR39J