MURR ELEKTRONIK
stay connected

SVS Eco valve form A 18mm 230V 3+PE field-wireable M16x1,5

Form A (18 mm) for pressure switch
0...230 V AC/DC, without components
metric

Image



Vicarious picture

Approvals

Form	
	29405
Technical Data	
Operating voltage	12...230 V AC/DC
Operating current per contact (40 °C)	max. 10 A
Connection diameter	0.5...1.5 mm²
Clamping range (cable diameter)	6...8 mm
Contact figure	Cable outlet can be turned in 90° steps
Compression gland	M16 × 1.5 mm
Protection	IP65 when plugged and screwed down (EN 60529)
Temperature range	-40...+80 °C
Commercial data	
Net weight	29
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1
Comments	
	Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 02/13

Contact layout

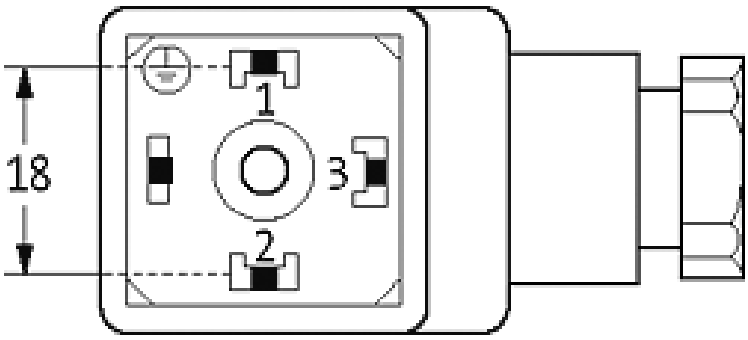

Circuit diagram

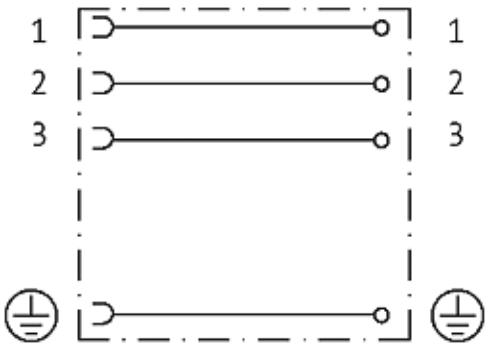

Dimension drawing

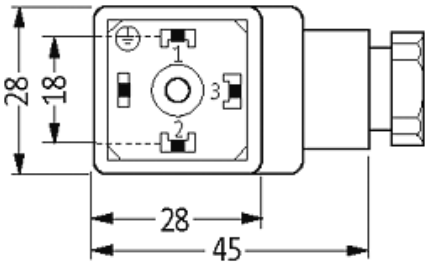

Height: 31 mm

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 02/13

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

MURRELEKTRONIK:

7000-41211-0000000 85440 7000-18021-6160500 7000-42021-0000000 7000-74001-0000000
7000-80061-6260500 52500 58172 7000-40561-6100100 7000-44111-0000000 7000-12461-0000000
7000-40021-6141000 7000-40021-6540150 7700-12041-1610500 90235 5000-00501-1210000
7000-19041-7020500 5000-00501-1500001 7000-12601-0000000 7000-40361-6350100
7000-88001-0300500 4000-70403-0001050 4000-70403-0001060 7000-40041-6350300
7000-41081-6360060 55132 58840 7000-12241-2151000 7000-15501-8050500 7000-40121-6140600