Inductors for power circuits
Wound metal
SPM-HZ series (for automotive)

RoHS | REACH SVHC-Free | Halogen Free | Lead Free

AEC-Q200

SPM6550-HZ type

Product Portal | Search | Simulation Model | Selection Guide | Tech Library | Tech Note | Application Guides Automotive

FEATURES

- Magnetic shield type wound inductor for power circuits using a metallic magnetic material.
- Compared to ferrite wound type inductors, it is possible to achieve large current, low Rdc, and compactness.
- Low inductance variance in high-temperature environments with good DC superimposition characteristics. –40 to 125°C (including self-temperature rise)
- Metallic magnetic material is used, and the structure has an integrated molded coil, so hum noise is lower than with ferrite core adhesive coils.
- Operating temperature range: –40 to +125 °C (including self-temperature rise)
- Compliant with AEC-Q200

APPLICATION

- Automotive-related equipment (Car navigation, car audio)

PART NUMBER CONSTRUCTION

SPM	6550	T	R33	M	HZ
Series name	L×W×H dimensions 7.1×6.5×5.0 mm	Packaging style	Inductance (µH)	Inductance tolerance	Internal code

CHARACTERISTICS SPECIFICATION TABLE

L (µH)	Tolerance	Measuring frequency (kHz)	DC resistance (mΩ)max.	DC resistance (mΩ)typ.	Rated current* Isat (A)typ.	Rated current* Itemp (A)typ.	Part No.
0.33	±20%	100	2.34	2.12	22.0	26.7	SPM6550T-R33M-HZ
0.47	±20%	100	2.97	2.70	20.5	26.1	SPM6550T-R47M-HZ
0.68	±20%	100	3.74	3.40	16.6	25.2	SPM6550T-R68M-HZ
1.0	±20%	100	4.95	4.50	15.8	17.9	SPM6550T-1R0M-HZ
1.5	±20%	100	6.49	5.90	10.3	17.1	SPM6550T-1R5M-HZ
2.2	±20%	100	10.7	9.70	8.3	14.2	SPM6550T-2R2M-HZ
3.3	±20%	100	17.5	15.9	6.5	10.0	SPM6550T-3R3M-HZ
4.7	±20%	100	24.6	22.3	5.8	8.2	SPM6550T-4R7M-HZ
6.8	±20%	100	38.0	34.5	4.7	6.2	SPM6550T-6R8M-HZ
10.0	±20%	100	60.5	55.0	4.3	4.9	SPM6550T-100M-HZ
15.0	±20%	100	86.4	78.5	3.8	3.6	SPM6550T-150M-HZ
22.0	±20%	100	171.6	156.0	3.0	2.6	SPM6550T-220M-HZ

* Rated current: smaller value of either Isat or Itemp.
Isat: When based on the inductance change rate (20% below the initial value)
Itemp: When based on the temperature increase (temperature increase of 40°C by self heating)

Measurement equipment


Measurement item	Product No.	Manufacturer
L	4284A	Keysight Technologies
DC resistance	AX-111A	ADEX
Rated current Isat	4284A+42841A+42842C	Keysight Technologies

∗ Equivalent measurement equipment may be used.



SPM6550-HZ type

L FREQUENCY CHARACTERISTICS

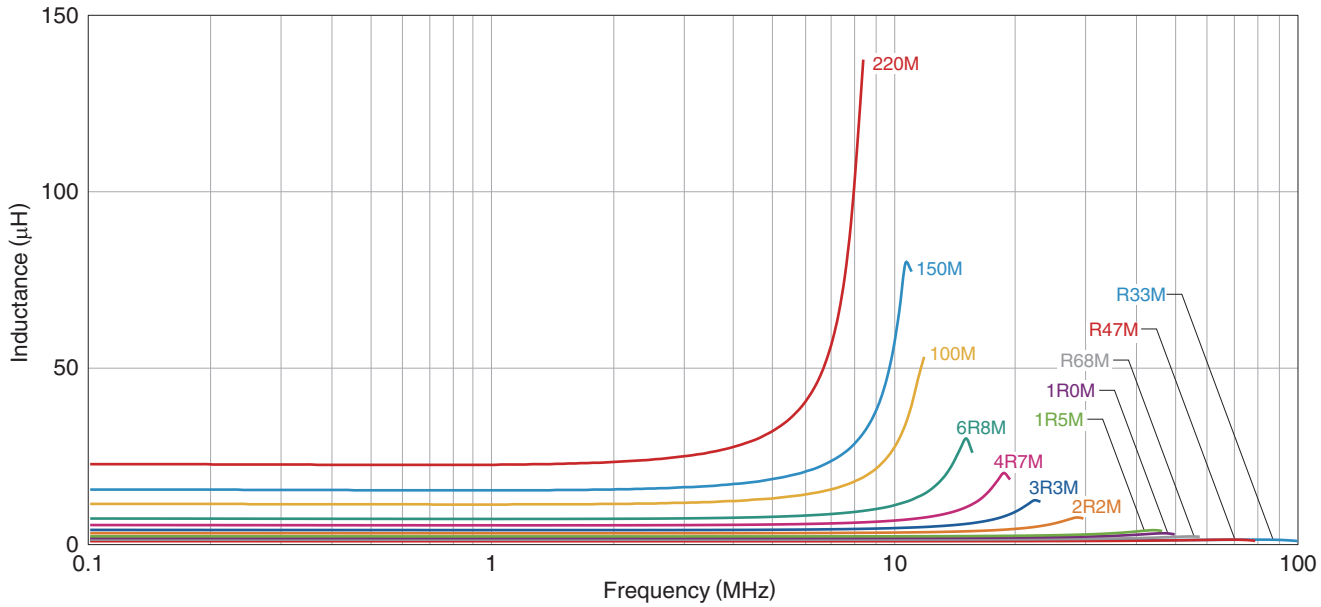


Measurement equipment

Product No.	Manufacturer
4294A	Keysight Technologies

∗ Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

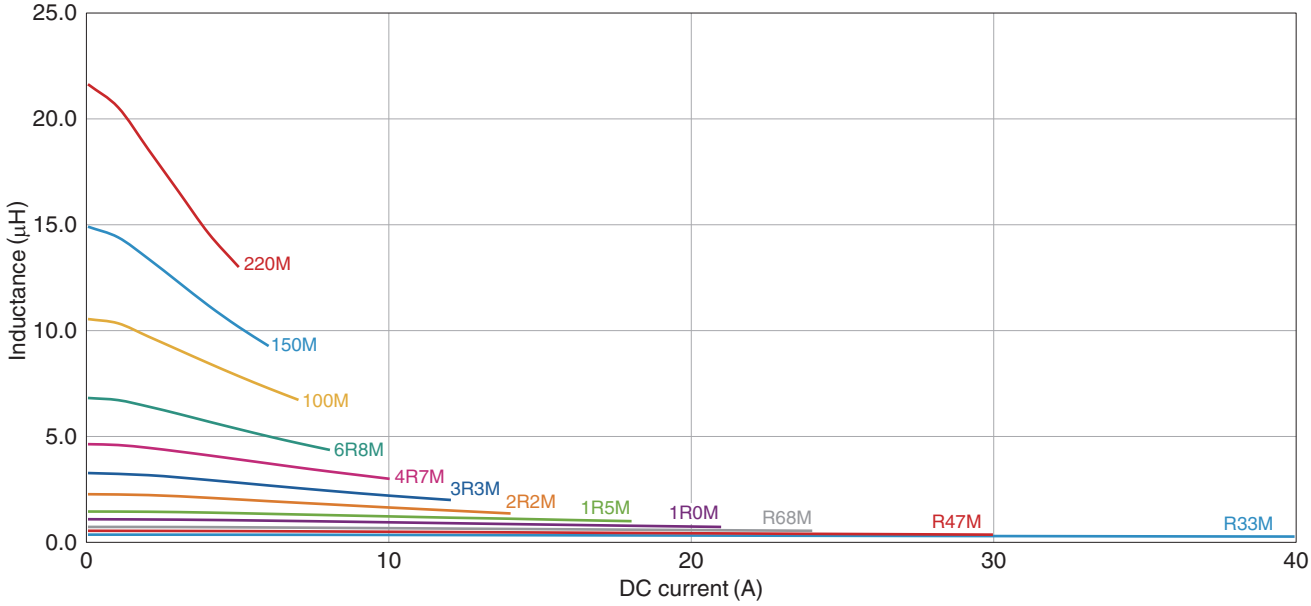


Measurement equipment

Product No.	Manufacturer
4284A+42841A+42842C	Keysight Technologies

∗ Equivalent measurement equipment may be used.

SPM6550-HZ type


SHAPE & DIMENSIONS

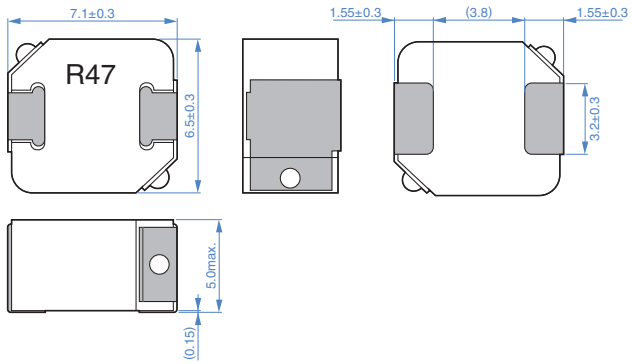

Dimensions in mm


PACKAGING STYLE

REEL DIMENSIONS

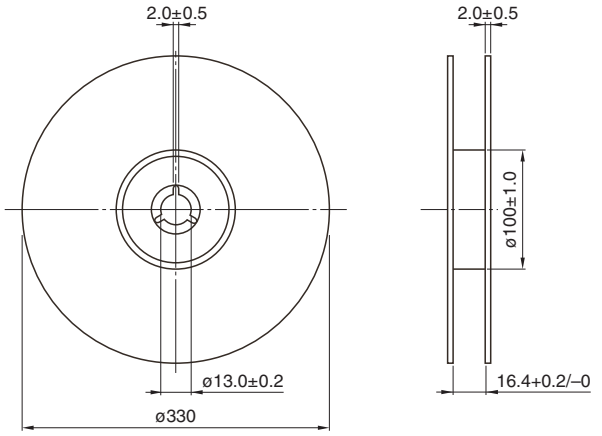

Dimensions in mm


TAPE DIMENSIONS

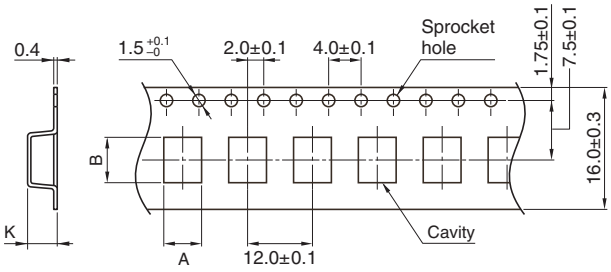

Dimensions in mm

Type	A	B	K
SPM6550-HZ	7.4	7.6	5.0

RECOMMENDED LAND PATTERN




Dimensions in mm

PACKAGE QUANTITY

Package quantity	1000 pcs/reel

RECOMMENDED REFLOW PROFILE

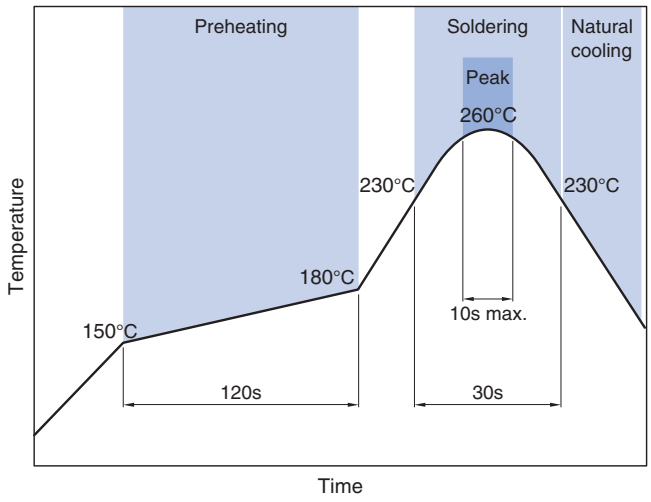

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating temperature range*	Storage temperature range**	Individual weight
–40 to +125 °C	–40 to +125 °C	1.06 g

* Operating temperature range includes self-temperature rise.
** The storage temperature range is for after the assembly.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

⚠ REMINDERS

- The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).
  If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
  If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Do not use products that have received any excessive mechanical shock such as by being dropped.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Do not expose the products to magnets or magnetic fields.
- The performance of the product may deteriorate if coating materials are used, thus please assess the situation beforehand by taking this factor into consideration.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products described in this catalog are intended to be installed in automobiles or automotive electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) and to be used in automobiles (including the case where the said automotive product is mounted in a vehicle) or standard applications as general electronic equipment in automotive applications or standard applications as general electronic equipment in automotive applications in accordance with the scope and conditions described in this specification, while the said automotive or general electronic equipment including the said product is intended to be used in the usual operation and usage methods, respectively. Other than automotive or automotive products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality requires a more stringent level of safety or reliability, or whose failure, malfunction or defect could cause serious damage to society, person or property.
  Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.
  If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in this specification, please contact us.

(1) Aerospace/aviation equipment
(2) Transportation equipment (electric trains, ships, etc.)
(3) Medical equipment
(4) Power-generation control equipment
(5) Atomic energy-related equipment
(6) Seabed equipment
(7) Transportation control equipment
(8) Public information-processing equipment
(9) Military equipment
(10) Electric heating apparatus, burning equipment
(11) Disaster prevention/crime prevention equipment
(12) Safety equipment
(13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TDK:

C3225C0G2A683J230AA FHV-5AN SPM3012T-R47M-LR B32024A3105M000 B82559A3292A025 B82559A7682A024 B88069X5600S102 C3216X7R2A224K115AE CGA2B3X7R1H473K050BD FA24C0G1H333JNU00 MLF1608D68NMTA00 B32654A6335K000 B82422A1562J100 B84111A0000A030 MLG1005S68NJTD25 MMZ1608S102ATA00 B59886C0120A070 B65884E0012D001 B82477D4333M900 B82496C3220G000 FHV-153AN CGA2B1C0G2A681J050BC FG26X7R2J103KNT00 CGA2B1X7R1C683M050BC CGA4J2X8R1H104M125AA MLG1005S2N4BTD25 MLG1005S7N5JTD25 MMZ1005S601ETD25 B32683A1223J000 MLG1005S0N8BTD25