



ROHS

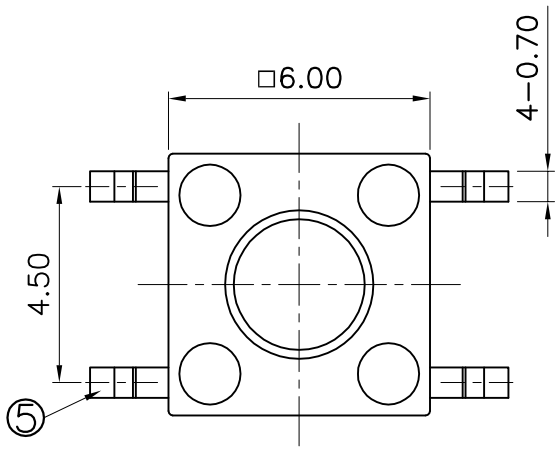


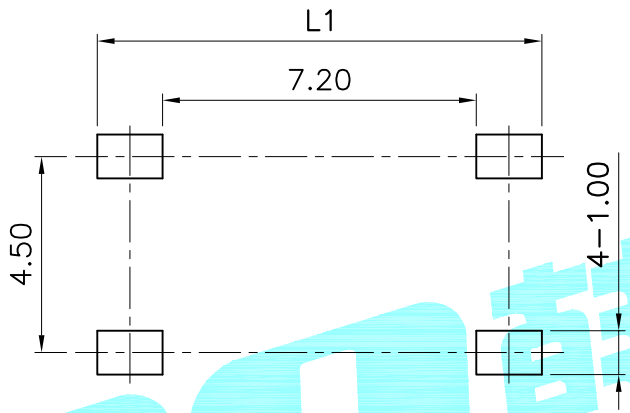

PCB Layout(Pattern side)

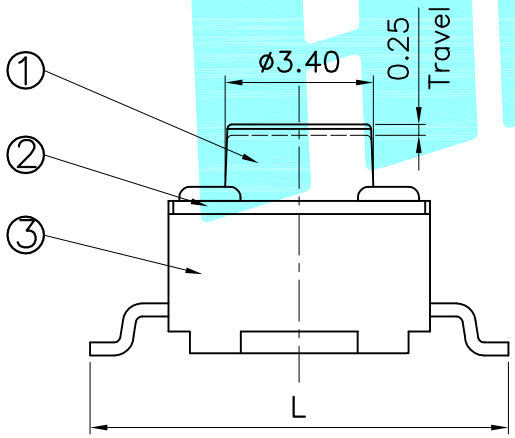

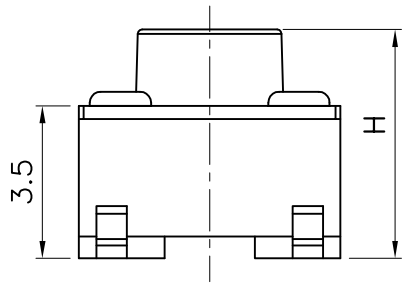



Circuit Diagram

NO.1			
PART NO	H	PART NO	H
A	4.3	Q	12
B	4.5	R	12.5
C	5	S	13
D	5.5	T	13.5
E	6	U	14
F	6.5	V	15
G	7	W	16
H	7.5	X	17
I	8	Y	18
J	8.5	Z	19
K	9	1	15.5
L	9.5	2	16.5
M	10	3	17.5
N	10.5	4	22
O	11	5	23
P	11.5	6	20

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4		
PART NO	L	L1
A	8	10
B	8.5	11
C	9	11
D	9.5	12
E	10	12

NO.5-NO.6	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	——	4	Brass(0.30t)	Plating silver	——
④	Contact	——	1	F.Ag/SUS	——	——
③	Base	——	1	Nylon	Black	——
②	Cover	——	1	SPCC	Plating Nickel	——
①	Keystoke	——	1	Nylon	Black	——

APPROVALS		DATE	HRO輔茂® ELECTRONICS CO.,LTD	
DRAWN	SUNNY	2020.7.7		
CHECKED			TITLE:	TACT SWITCHS
APPROVALS			PART NO.	K2-1102SP-□□□□-□□
TOLERANCES ARE	30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1
			DRAWING NO.	——
				PROJ: SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K2-1102DP-G4SW-04 K5-1617SA-01 K2-1818DP-A3SW-01 U-C-M5DW-W-1 U-F-M5DD-Y-L U-M-M5DD-W-2 U-F-M5DD-W-L DA-10RP K8-5851D-L1 SIM-08A U-C-M5SS-Y-1 U-F-M5SS-W-5 DQ-03BP K3-2258S-E1 PJ-3250-5A PJ-399B-6A SS-22D03-G4 TYPE-C-31-M-04 K2-1102SP-A5SC-04 DC-031A-10A DS-01BP K2-1102AT-A4CW-01 K2-1102BG-I4CW-01 U-F-M5DD-Y-L1 K2-1102SP-K4SC-04 U-F-M5DS-Y-1 K2-1102DP-S3SW-04 K3-1346S-F1 ES-07KP K2-1101DF-A4DW-01