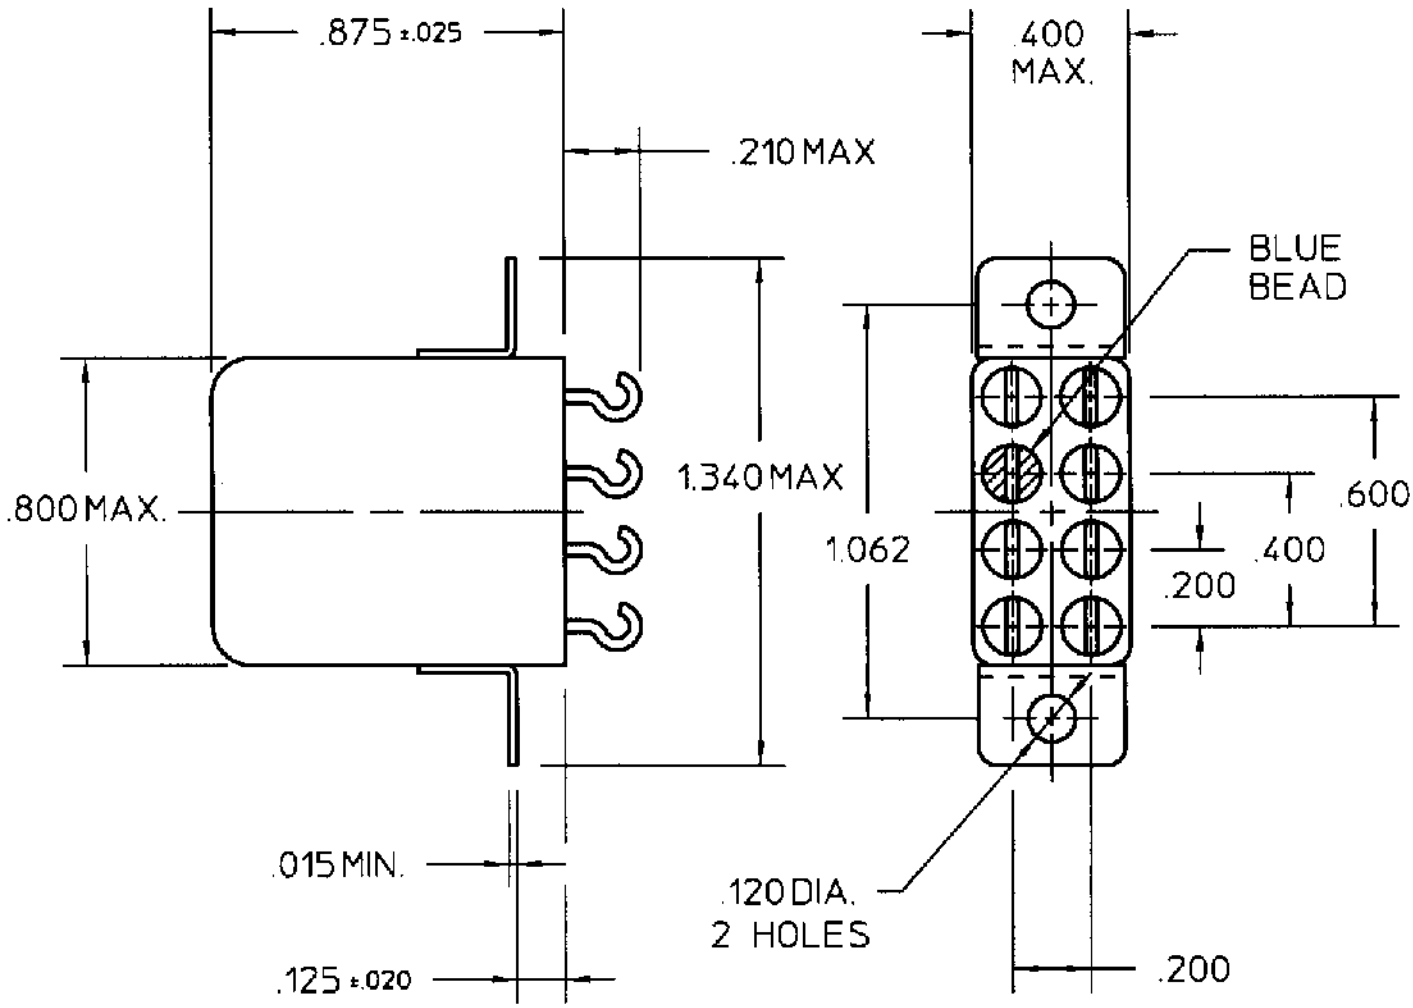


TOLERANCE ± .010

COIL: @ 25° C

RESISTANCE	540-770 OHMS
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX, 2.3 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 6 MS MAX.
* CONTACT BOUNCE 1 MS MAX.
* (MEASURED AT 100mA 28 VDC)

CUSTOMER DATA SHEET

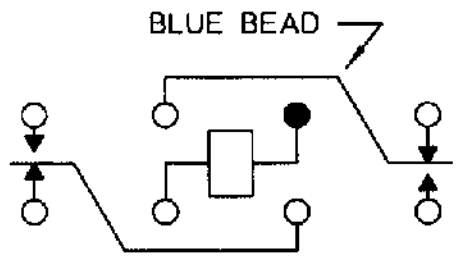

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/15/95 | CK. 11/15/95 MB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO M5757/10-039

TYPE "FW" RELAY

FW1120G01

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

ROX05SJ18R SMW73R0JT 2834055-1 1743455-2 RH73H2A40MKTN MPT100C18RF 175977-2
1969656-1 3631B101LL TE50BR39J 1393431-1 917696-1 1-794222-0 1-962915-1 2377783-2
3-1393225-0 CPF0402B37K4E1 650075-000 936348-1 2380312-2 141991-2 2310537-1 CRGCQ2010J3K3
SBCHE154R7K SBCHE64R7K U5254-000005-030PA 1903112-2 2-292161-3 2005330-1 3430B2F51RTDF