

Downloaded from Arrow.com.


DIMENSIONS mm (inches)

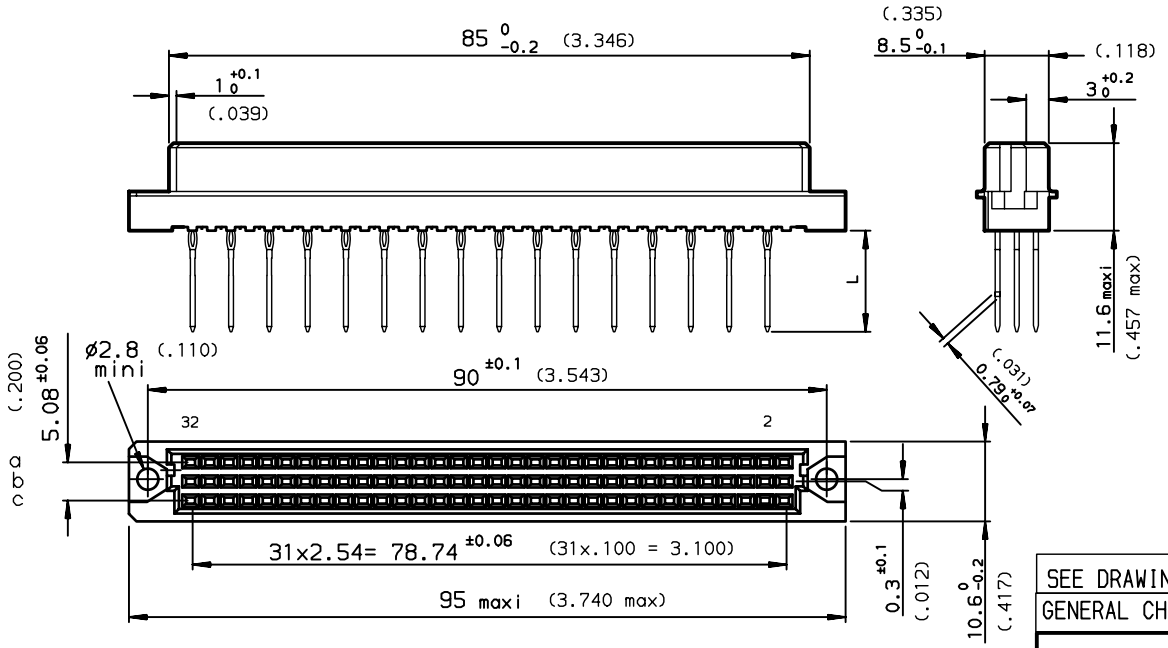

METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PCB DRILLING

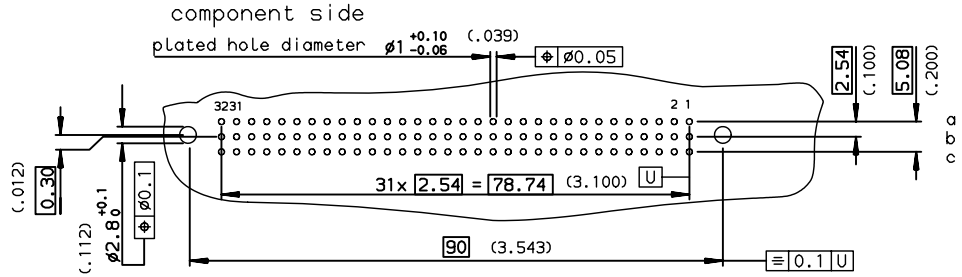

SEE DRAWING C-8609-0000C

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

European Views

PART NUMBER 8609 □□ 81 □ 7 □ 8 □

PIN OUT
rows a-b-c — 3 — 48
rows a-c — 4 — 32

NUMBER OF CONTACTS

TERMINATION
L = 13.10 ±0.20 (.515) — 1 wrap — 91
L = 17.10 ±0.20 (.673) — 2 wraps — 92
L = 3.00 ±0.20 (.118) — short post — 94

PERFORMANCE CLASS
DIN 41612 class 3 — 4
DIN 41612 class 2 — 5
DIN 41612 class 1 — 6

TERMINATION TYPE
TIN LEAD — 000E3
LEAD FREE — E3LF

rev	ecn no	dr	date
D	-	MAS	1999/08/05
E	LS05-004	JTA	2005/02/28
F	LS06-0095	LGO	2006/06/17
G	LS06-0171	HLG	2006/10/27
H	LS07-0051	HLG	2007/02/21
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 ✓ tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

projection mm

Dr	ROUILLARD	1994/11/14
Eng	TARON	1994/11/14
Chr	LEGARE	1994/11/14
Appr	LEGARE	1994/11/14

ANGULAR 0.XX° ±2° | LINEAR 0.X ±0.1 | 0.XX ±0.1 | 0.XXX ±0.1

size A3 | Scale 1.5

ECN LS07-0051

Product family DIN 8609 | Spec ref -

title STRAIGHT FEMALE - STYLE C
PRESS FIT

dwg no C-8609-0437 | Rev. H

catalog no - | CUSTOMER | sheet 1 of 1

REV F - 2006-04-17

Copyright FCI.

PDM: Rev:H STATUS: Released Printed: May 14, 2011