Mounting flange


BF 12-F



- For mounting cylindrical sensors with metal thread
- Secure mounting of the sensor via a snap lock
- Installation position defined by fixed stop
- Adjustable via slot mounting

Plastic mounting adapter, 12 mm

Dimensions

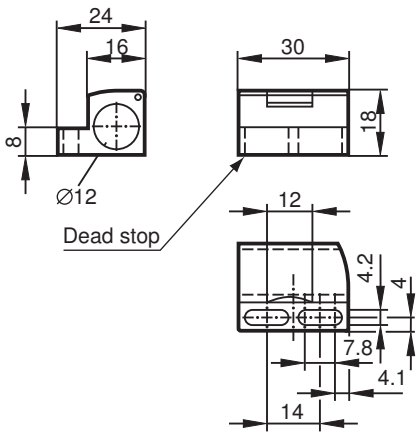

Technical Data

General specifications	
Inside diameter	12 mm
Ambient conditions	
Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications	
Material	black polycarbonate (PC)
Construction type	For sensors with 45° chamfer

Release date: 2021-01-05 Date of issue: 2021-02-05 Filename: 107459_eng.pdf

Mounting

Installation
Position the mounting bracket on the desired place
Mark the position of drilling holes in the mid section of the oblong holes
Drill the mounting holes through the surface
Screw on the mounting bracket slightly via the lateral oblong holes by using suitable M4 screws
Stick the sensor through the mounting bracket and fix the sensor by the lid on the upper part of the bracket
Adjust the bracket and make the final positioning
Fix the mounting bracket finally with the screws

Release date: 2021-01-05 Date of issue: 2021-02-05 Filename: 107459_eng.pdf

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PEPPERL+FUCHS:

UB800-18GM40-I-V1 MH4-2057 NBB2-12GM50-E2 OBD450-18GK40A-E2 UB2000-F42-E6-V15 134143 GLV30-8-2500/47/73C NBB5-18GM50-A0 OBR12M-R100-2EP-IO-V31-L S1SD-1AI-1U.1 114642 OQT150-R101-2EP-IO-V31 BF18 WCS3-MH1 KLR-C02-2,2-2,0-K70 NBB0.8-4M25-E0 NBB8-18GM50-E0 OBR5000-18GK40A-E2 UBE800-F77-SE2-V31 OQT150-R100-2EP-IO-V31-L CCN15-30GS60-E2-V1 NBB0.8-5GM25-E2 NBB2-12GM50-A2-V1 NBB2-8GM40-E0-V1 OBR2500-12GM40-E5 24772 34441 NBB1-4GM22-E2 NBB4-12GM50-A2-V1 NBB5-18GM50-E2