


Technical Data Sheet

SMA MALE COAXIAL TERMINATION 18 GHZ 2W


PAGE **1/2**	ISSUE **16-11-18B**	SERIES **TERMINATION**	PART NUMBER **R404N01000**

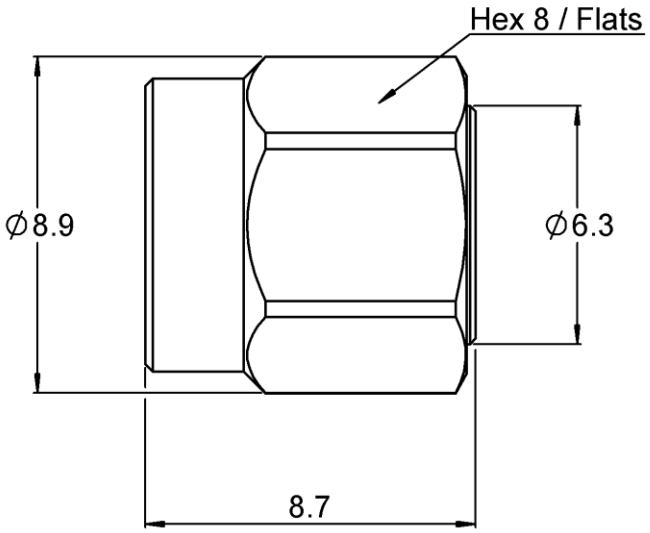



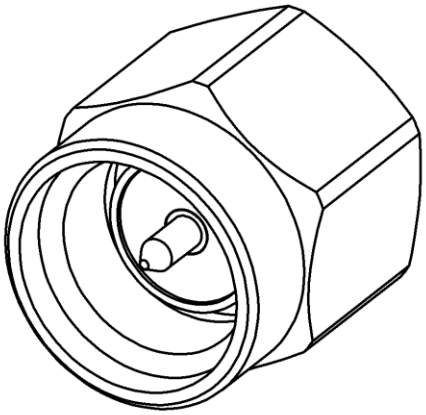

All dimensions are in mm. Tolerances according ISO 2768 m-H



COMPONENTS	MATERIALS	PLATING (µm)
Body	**STAINLESS STEEL**	**PASSIVATED**
Center contact	**BRASS**	**GOLD OVER NICKEL**
Outer contact	**STAINLESS STEEL**	**GOLD OVER NICKEL**
Insulator	**PTFE**	
Gasket	**SILICONE RUBBER**	
Substrate	**ALUMINA CERAMIC**	
Resistor	**THICK FILM**	
Others parts		

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

ELECTRICAL CHARACTERISTICS

Frequency (GHz)	**DC - 8**	**8 - 12.4**	**12.4 - 18**
V.S.W.R (≤)	**1.10**	**1.15**	**1.20**


Operating Frequency Range	**DC - 18**	GHz
Impedance	**50**	Ω
DC Resistance	**50**	Ω ± 5%
Peak power at 25°C (1µs, 1‰)	**100**	W
Average power at 25°C	**2 (1)**	W (Free Air Cooled)
		W (Conduction Cooled)

MECHANICAL CHARACTERISTICS

Connectors	**SMA**	**Male**	**MIL C 39012 (2)**
Weight	**2,2000** g		

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	**-55/+125**	°C
Storage temperature range	**-55/+125**	°C

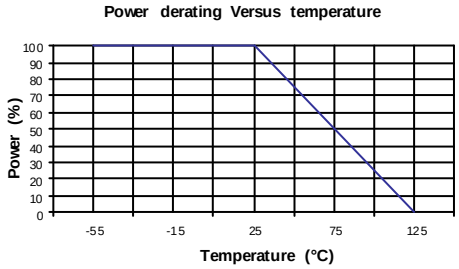

SPECIFICATION

OTHER CHARACTERISTICS

IP67 in mated conditions

Notes:

(1) Compliant with endurance requirement per MIL DTL 39030

(2) Insertion force of the female contact on the mating connector significantly exceeding the specifications of MIL C 39012 (13.2 N max with specified test gauge) could result in the permanent deterioration of the ceramic element of the termination and affect the center pin retention.

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

R142083000 R143156000 R141323000W EPXBE13P1SB R161010000 R180300007W R284C0351003 R284C0351050 EPXBE14PB R125176000W R161183410W R164329200 R280222000 R644543004 5919-9503-000 R114781000W R125403001 R125704000 R142076161 R414720000 EPXBN06PB R114554000W R124175120 R125078000W R125720001 EPXBE28SA R434712001 R941961600 R222L10001 R694252537