ABI-048-RC ELECTRO MECHANICAL INDICATOR


Specifications	ABI-048-RC
Rated voltage	6VDC
Operating voltage	4~8VDC
Rated current*	≤33mA
Sound output at 30cm*	≥95dB
Resonant frequency	400±100Hz
Tone	Single
Operating temperature	-20~+60ºC
Storage temperature	-30~+70ºC
Housing Material	ABS (White)
Lead Material	UL1007 AWG28
Weight	17g

* Value applying at rated voltage (DC)

Features

- ROHS compliant
- White in colour
- Fitted with flying leads
- Panel or base flange mounted
- Housing material: ABS

All data at 25°C unless otherwise specified

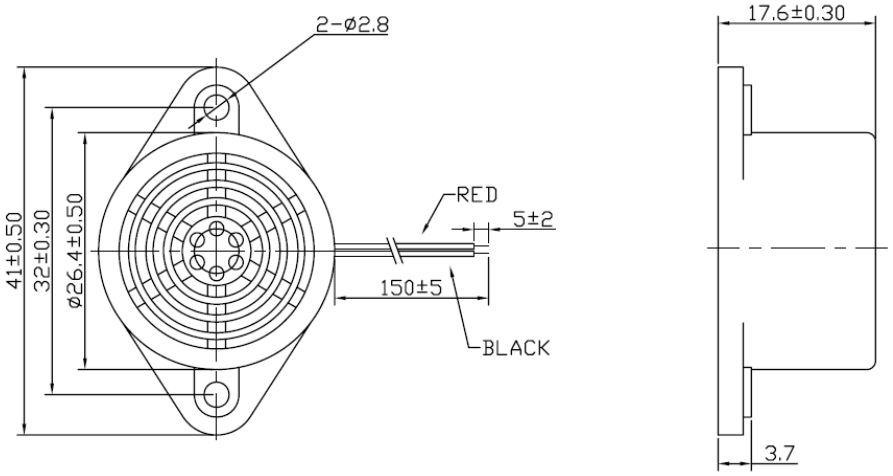

Dimensions Unit: mm Tolerance: ±0.5mm

ALAN BUTCHER COMPONENTS LTD

Alan Butcher Components Ltd
Unit 1 Beechwood Clump Farm Industrial Estate Tin Pot Lane Blandford Dorset DT11 7TD
Telephone 01258 456360 **Facsimile** 01258 459194 **Email** sales@abcomponents.co.uk
www.abcomponents.co.uk

nqa. ISO 9001 Registered UKAS QUALITY MANAGEMENT 015
BS EN ISO 9001 Certification No 5239

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

multicomp:

MC36427 MUR1540 MCMR50V335M4X7 SMAJ160A-13-F MC-SVT1-S06-G MC0603N100J201CT MCMR06X1004FTL MCMR08X2000FTL MCSR08X3300FTL MP006964 MCSDC0603-560KU MCSDRH73B-681MHF 2213R-24G CFS-TF-1818 CMS-DF-1825 MC0402WGF499JTCE MCAL0410A1-471KU MCLPR50V478M30X25 MP006937 MC34589 MC34747 MCWF12R7150BTL MCWR08X39R0FTL MP005415 MC0603B393K500CT MC0603N100F500CT MCMET 800MA 250V MCMF0W4FF8202A50 SPC19989 CF06332T/4/10