

Mechanical Dimensions (mm)

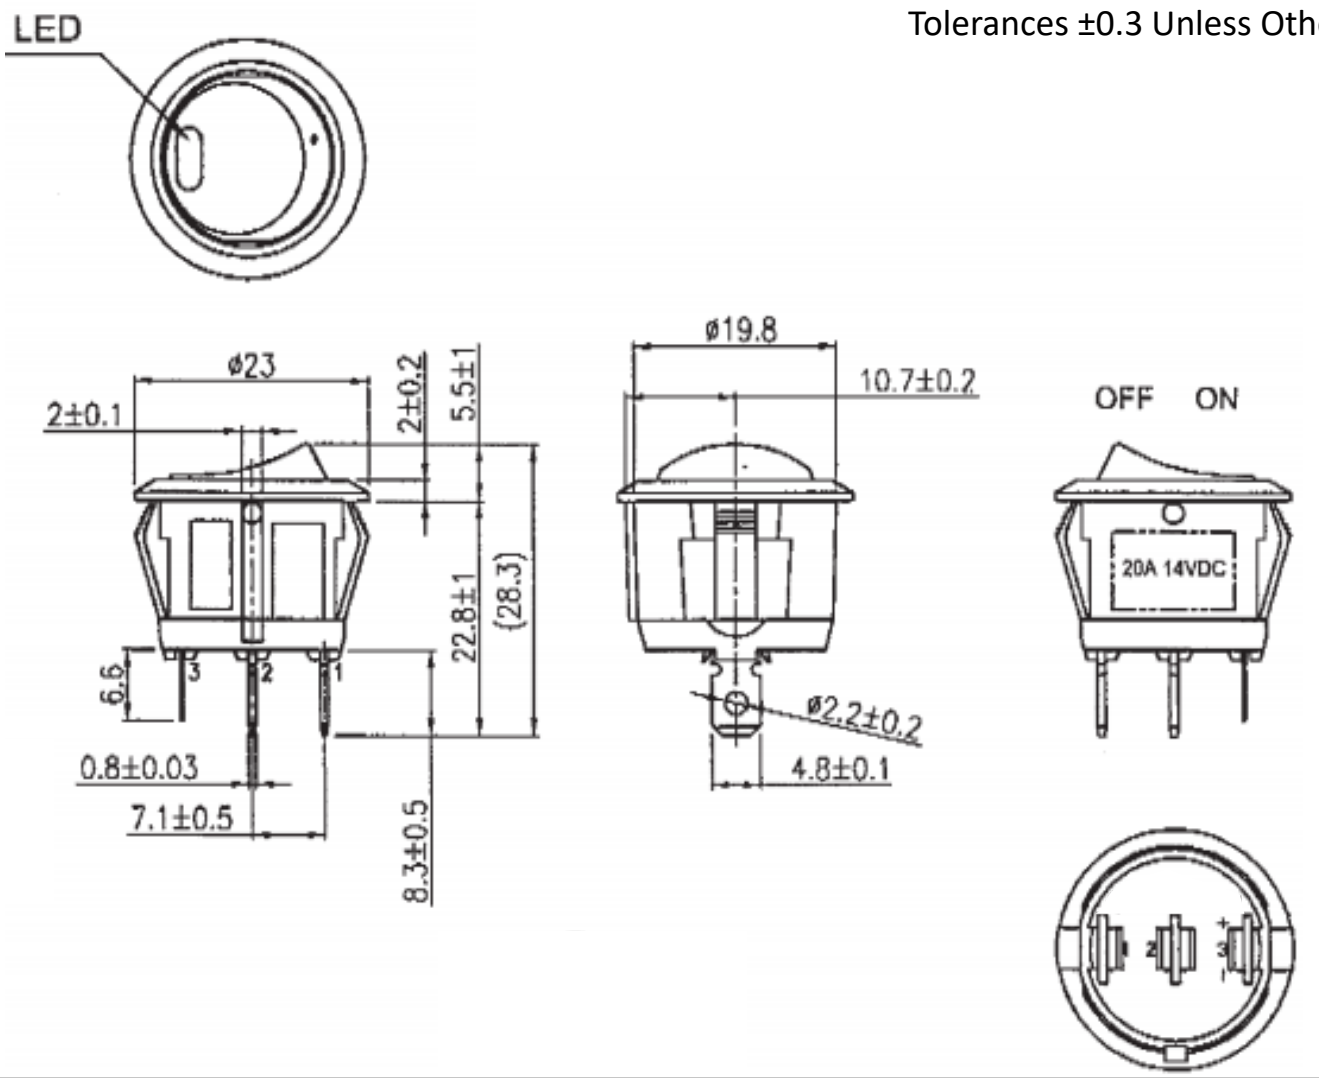


Mounting Hole

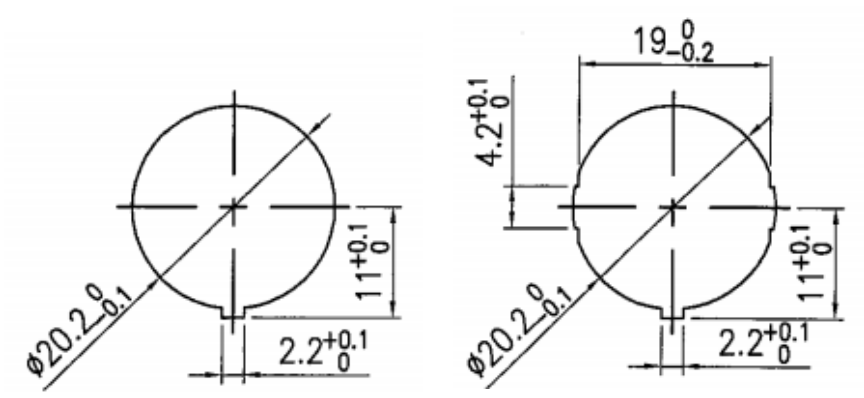

Thickness: 2.0~3.0 Thickness: 0.7~3.0

Circuit Diagram

4P SPST OFF-ON (LED-I)

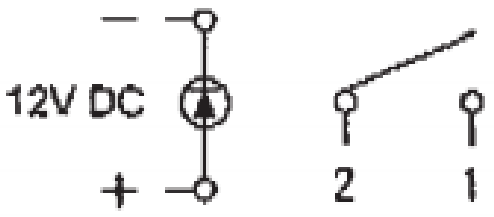

Electrical Specifications

Rating	20A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66 (94-V2)
Actuator	Black, Nylon 66 (94-V2)
Terminals	Copper alloy, Silver plating
Lens	Red clear, PC
LED	Red (Independent)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

TB1-2H-DC-6 PB-1A-DC-2-RDL PB-1B-DC-2-RIL RD2-1A-DC-1-AL RG3-1A-DC-1-B SC-B SRD2-1G-DC-1-BNN TC6-P1-Z TE1-1F-DC-1-PB TA2-1G-DC-6-O SB-1B-DC-3-R SRA1-2F-DC-1-NN SRB1-1G-DC-1-NN PD-1E-DC-9-UL SRC1-1B-DC-1-B TA2-1A-DC-5 PB-1A-DC-2-B RC-1A-DC-1-AL RF1-1A-DC-2-B-3 RF3-1A-DC-2-GL SRA1-1A-DC-1-NN-2 SRD1-2A-DC-1-BGN TE3-1A-DC-1-AL SB-1B-DC-3-B SRD2-2F-DC-1-BNN TE6-1A-DC-1-UL RA4-2A-DC-2-AL TA1-1A-DC-4 WR1 SRD2-2F-DC-1-RNN