SANYEAR

多层片式陶瓷电容器规格书

MULTILAYER CHIP CERAMIC CAPACITOR CATALOG

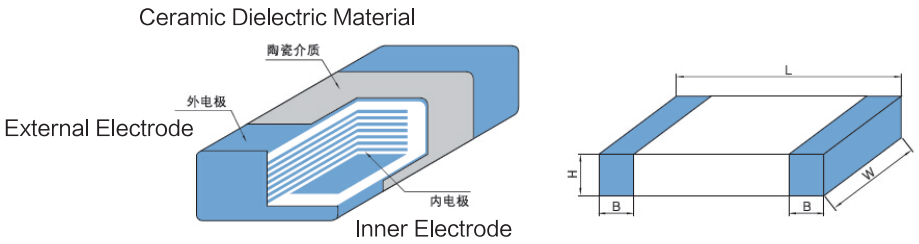
多层片式陶瓷电容器 Multilayer Chip Ceramic Capacitor

■ 产品特点 Product Features

●产品尺寸精度高，便于自动贴片机高效装配
●端电极为三层电极，适合波峰焊与回流焊；介电体与外表为同种材料，环境条件影响小
●含有C0G到Y5V各种温度特性介质，适用于计算机、通讯、家用电器和仪器仪表灯普通电子设备

●The precision of product size is high,suitable for auto SMT machines high efficiency assembly.
●External Electrode has 3 layers,suitable for both wave and reflow soldering.
●Consist of all kinds of temperature dielectric material form C0G to Y5V,suitable for computers, communications,home appliances,instruments and other normal electronic equipments.

■ 产品结构 Product Construction



■ 产品尺寸 Product Dimensions

尺寸 Size	MLCC尺寸规格（单位：mm）			
	L	W	H（max）	B（max）
01005	0.40±0.09	0.20±0.09	0.29	0.13
0201	0.60±0.09	0.30±0.09	0.39	0.20
0402	1.00±0.30	0.50±0.30	0.80	0.35
0603	1.60±0.20	0.80±0.20	1.00	0.60
0805	2.00±0.20	1.25±0.20	1.45	0.75
1206	3.20±0.30	1.60±0.30	1.90	0.80
1210	3.20±0.40	2.50±0.30	2.80	0.80
1808	4.50±0.40	2.00±0.30	2.80	1.50
1812	4.50±0.40	3.20±0.40	3.50	1.50
2220	5.70±0.50	5.00±0.40	3.50	1.30
2225	5.70±0.50	6.40±0.50	3.00	1.10

常规多层片式陶瓷电容器 General Multilayers Chip Ceramic Capacitor

■ 产品特点 Product Features

- COG（NPO）：最常用的温度补偿型电容器，属于Ⅰ类介质材料，其性能稳定，温度系数在0±30PPM/℃以内，具有好的高频特性。
- X7R：工业中广泛使用的一种温度稳定型电容器，属于Ⅱ类介质材料，具有较高的介电常数，在使用温度（－55℃~＋125℃）范围内容值变化率在±15%以内。
- X6S：工业中广泛使用的一种温度稳定型电容器，属于Ⅱ类介质材料，具有较高的介电常数，在使用温度（－55℃~＋105℃）范围内容值变化率在±22%以内。
- X5R：工业中广泛使用的一种温度稳定型电容器，属于Ⅱ类介质材料，具有较高的介电常数，在使用温度（－55℃~＋85℃）范围内容值变化率在±15%以内。
- Y5V：普通用途的电容器，在使用温度（－30℃~＋85℃）范围内容值变化率较大，＋22%/－82%以内，具有高介电常数，可以用小的尺寸做大容量的电容。

- C0G(NP0)：The most normal temperature compensated capacitor,belongs to Class I dielectric material with stable performance,TC 0±30ppm/℃,high frequency.
- X7R：Widely used in industries temperature stable capacitor,belongs to Class II dielectric material with high dielectric constant,and the capacitance changed rate is ±15% for working temperature(−55℃~+125℃).
- X6S：Widely used in industries temperature stable capacitor,belongs to Class II dielectric material with high dielectric constant,and the capacitance changed rate is ±22% for working temperature(−55℃~+105℃).
- X5R：Widely used in industries temperature stable capacitor,belongs to Class II dielectric material with high dielectric constant,and the capacitance changed rate is ±15% for working temperature(−55℃~+85℃).
- Y5V：Y5V dielectric is generally used dielectric material,belongs to Class II dielectric material,it shows a variation of capacitance within +22%/−85% when the temperature is between −30℃~+85℃. This kind of dielectric is with very high dielectric constant and suitable for high value capacitors.

■ 产品规格型号 Part Number

C	0603	X7R	102	K	500	N	T
产品类型 Product Type	尺寸 Size	温度系数 温度特性 T.C.	电容值 Capacitance	允许偏差 Tolerance	额定电压 Rate Voltage	端头类型 Terminal Type	包装 Packaging
多层式陶瓷电容器 MLCC	01005 0201 0402 0603 0805 1206 1210 1808 1812 2220 2225	COG (NPO) X7R X6S X5R Y5V	1R5=1.5pF 100=10pF 222=2.2NF 105=1uF 475=4.7uF	A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=+80% -20%	4R0=4V 6R3=6.3V 250=25V 500=50V 101=100V 251=250V 102=1KV	N:银（或铜）/镍/锡 N=Ag（or Cu）/Ni/Sn	T=编带 Taping B=袋散装 Bulk

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	C0G											
尺寸	01005	0201		0402	0603	0805	1206	1210	1808	1812	2220	2225
V_{DC} / C_P	6.3 10 16 25	16 25	50	10 16 25 50	10 16 25 50	10 16 25 50	16 25 50	16 25 50	16 25 50	16 25 50	16 25 50	16 25 50
0R47	■	■	■	■	■	■	■					
0R5	■	■	■	■	■	■	■					
0R56	■	■	■	■	■	■	■					
0R68	■	■	■	■	■	■	■					
0R82	■	■	■	■	■	■	■					
1R0	■	■	■	■	■	■	■					
1R2	■	■	■	■	■	■	■					
1R3	■	■	■	■	■	■	■					
1R5	■	■	■	■	■	■	■					
1R8	■	■	■	■	■	■	■					
2R2	■	■	■	■	■	■	■					
2R7	■	■	■	■	■	■	■					
3R3	■	■	■	■	■	■	■					
3R9	■	■	■	■	■	■	■					
4R7	■	■	■	■	■	■	■					
5R6	■	■	■	■	■	■	■					
6R8	■	■	■	■	■	■	■					
8R2	■	■	■	■	■	■	■					
9R0	■	■	■	■	■	■	■					
100	■	■	■	■	■	■	■	■		■	■	■
120	■	■	■	■	■	■	■	■		■	■	■
150	■	■	■	■	■	■	■	■		■	■	■
180	■	■	■	■	■	■	■	■		■	■	■
220	■	■	■	■	■	■	■	■		■	■	■
270	■	■	■	■	■	■	■	■		■	■	■
330	■	■	■	■	■	■	■	■		■	■	■
390	■	■	■	■	■	■	■	■		■	■	■
470	■	■	■	■	■	■	■	■		■	■	■
560	■	■	■	■	■	■	■	■		■	■	■
680	■	■	■	■	■	■	■	■		■	■	■
750	■	■	■	■	■	■	■	■		■	■	■
820	■	■	■	■	■	■	■	■		■	■	■
101	■	■	■	■	■	■	■	■	■	■	■	■
121		■	■	■	■	■	■	■	■	■	■	■
151		■	■	■	■	■	■	■	■	■	■	■
181		■	■	■	■	■	■	■	■	■	■	■
221		■		■	■	■	■	■	■	■	■	■
271		■		■	■	■	■	■	■	■	■	■
331		■		■	■	■	■	■	■	■	■	■
391		■		■	■	■	■	■	■	■	■	■
471		■		■	■	■	■	■	■	■	■	■
511		■		■	■	■	■	■	■	■	■	■
561		■		■	■	■	■	■	■	■	■	■
681		■		■	■	■	■	■	■	■	■	■
821		■		■	■	■	■	■	■	■	■	■
102		■		■	■	■	■	■	■	■	■	■
122					■	■	■	■	■	■	■	■
152					■	■	■	■	■	■	■	■
182					■	■	■	■	■	■	■	■
222					■	■	■	■	■	■	■	■
272					■	■	■	■	■	■	■	■
332					■	■	■	■	■	■	■	■
392					■	■	■	■		■	■	■
472					■	■	■	■		■	■	■
562					■	■	■	■		■	■	■
682					■	■	■	■		■	■	■
822					■	■	■	■		■	■	■
103					■	■	■	■		■	■	■
123						■	■	■		■	■	■
153						■	■	■		■	■	■
183						■	■	■		■	■	■
223						■	■	■		■	■	■
273						■	■	■		■	■	■
333						■	■	■		■	■	■
473							■	■				■
563							■	■				■
104							■	■				

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	X7R																									
尺寸	01005	0201			0402				0603			0805			1206		1210			1812		2220			2225
V_{DC} / C_p	6.3 10 16	6.3	10 16 25	50	6.3	10	16 25	50	6.3	10 16	25 50	6.3 10 16	25	50	6.3 10 16	25 50	6.3 10	16 25	50	6.3 10 16 25	50	6.3 10 16	25	50	6.3 10 16 25 50
101	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
121	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
151	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■									
181	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■									
221	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■						
241	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■						
271	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■						
331	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■						
391	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■						
471	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
511	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
561	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
681	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
821	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
102	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
122		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
152		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
182		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
222		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
272		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
332		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
392		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
472		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
562		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
682		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
822		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
103		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
123		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
153		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
183		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
223		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
273		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
333		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
393		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
473		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
563		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
823		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
104		■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
124					■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
154					■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
184					■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
224					■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
274					■	■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
334					■	■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
394					■	■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
474					■	■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
564					■				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
684					■				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
824					■				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
105					■				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
155									■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■
225									■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■
275									■			■	■		■	■	■	■	■	■	■	■	■	■	■
335									■			■	■		■	■	■	■	■	■	■	■	■	■	■
395									■			■	■		■	■	■	■	■	■	■	■	■	■	■
475									■			■	■		■	■	■	■	■	■	■	■	■	■	■
565												■			■	■	■	■	■	■		■	■	■	■
106												■			■	■	■	■	■	■		■	■	■	■
226															■		■	■		■		■	■		
476																	■					■			

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	X6S																																
尺寸	01005			0201					0402				0603			0805			1206			1210				1812			2220				
V_{DC} / C_p	4	6.3	10	4 6.3	10	16	25	50	6.3 10	16	25	50	6.3 10	16 25	50	6.3 10	16 25	50	6.3	16 25	50	6.3	10	16 25	50	6.3 10	16 25	50	6.3 10	16	25	50
101				■	■	■	■	■	■	■	■	■																					
121				■	■	■	■	■	■	■	■	■																					
151				■	■	■	■	■	■	■	■	■																					
181				■	■	■	■	■	■	■	■	■																					
221				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
271				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
331				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
391				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
471				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
511				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
561				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
681				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
821				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
102				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
122			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
152			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
182			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
222			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
272			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
332			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
392			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
472			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
562			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
682		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
822		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
103		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
123	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
153	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
183	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
223	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
273	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
333	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
393	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
473	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
563	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
823	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
104	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
124				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
154				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
184				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
224				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
274				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
334				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
394				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
474				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
564				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
684				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
824				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
105				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
225				■					■	■	■		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
475									■	■			■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
106									■				■	■		■	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■
226													■			■	■		■	■		■	■	■	■	■	■	■		■	■	■	
476																■			■	■		■	■	■	■	■	■			■	■		
107																			■			■	■			■			■				
227																						■											

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	X5R																																
尺寸	01005			0201					0402				0603			0805			1206			1210				1812			2220				
V_{DC} / C_p	4	6.3	10	4 6.3	10	16	25	50	6.3 10	16	25	50	6.3 10	16 25	50	6.3 10	16 25	50	6.3	16 25	50	6.3	10	16 25	50	6.3 10	16 25	50	6.3 10	16	25	50
101				■	■	■	■	■	■	■	■	■																					
121				■	■	■	■	■	■	■	■	■																					
151				■	■	■	■	■	■	■	■	■																					
181				■	■	■	■	■	■	■	■	■																					
221				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
271				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
331				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
391				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
471				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
511				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
561				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
681				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
821				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
102				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
122			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
152			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
182			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
222			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
272			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
332			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
392			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
472			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
562			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
682		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
822		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
103		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■												
123	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
153	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
183	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
223	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
273	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
333	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
393	■	■		■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■												
473	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
563	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
823	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
104	■	■		■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
124				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
154				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
184				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
224				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
274				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
334				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
394				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■												
474				■	■	■			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
564				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
684				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
824				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
105				■	■				■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
225				■					■	■	■		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
475									■	■			■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
106									■				■	■		■	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■
226													■			■	■		■	■		■	■	■	■	■	■	■		■	■	■	
476																■			■	■		■	■	■	■	■	■			■	■		
107																			■			■	■			■			■				
227																						■											

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	Y5V																													
尺寸	0402				0603			0805				1206				1210				1808			1812			2220			2225	
C_p \ V_{DC}	6.3 10	16	25	50	6.3 10	16 25	50	6.3 10	16	25	50	6.3	10 16	25	50	6.3	10	16	25 50	16	25	50	6.3 10	16	25 50	6.3 10 16	25	50	6.3 10 16 25	50
103	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
123	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
153	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
183	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
223	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
273	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
333	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
393	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
473	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
563	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
823	■	■	■	■	■	■	■	■	■	■	■	■	■	■																
104	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
124	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
154	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
184	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
224	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
274	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
334	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
394	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
474	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
564	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
684	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
824	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
105	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
155	■	■	■		■	■		■	■	■	■	■	■	■	■	■	■	■	■											
225	■	■	■		■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
275	■	■			■			■	■	■		■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
335	■	■			■			■	■	■		■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
395	■	■			■			■	■	■		■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
475	■	■			■			■	■	■		■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
565	■				■			■	■			■	■	■		■	■	■	■	■			■	■	■	■	■	■	■	
106	■				■			■	■			■	■	■		■	■	■	■	■			■	■		■	■	■	■	
226								■				■	■			■	■	■					■	■		■	■	■		
476												■				■	■						■	■		■	■			
107																■							■			■				

■ 技术指标和实验方法 Specifications and Test Method

NO	项目 Item	技术指标 Specification		实验方法 Test Method
1	外观 Appreance	无异常 No abnormalities		通过显微镜视觉检测（X10） On microscope
2	尺寸 Dimension	在要求的范围内 Within the specified dimensions		采用精度不低于0.01mm千分尺 Using calipers on micrometer with tolerance no less than 0.01mm
3	容量(c) Capacitance	在要求的范围内 Within the specified dimensions		Class I : Cp≤1000pF 1MHz±10%,1.0±0.1Vrms Cp>1000pF 1KHz±10%,1.0±0.1Vrms Class II: Cp<10μF 1KHz±10%, 1.0±0.1Vrms Cp≥10μF 120±24Hz, 1.0±0.1Vrms
4	损耗(Q/DF) Dissipation Factor	C0G	Cp<30pF,Q≥400+20Cp Cp≥30pF,Q≥1000	
		X7R X6S X5R	■U_R≥100V DF≤7.5% ■25V≤U_R≤50V, DF≤3.5% DF≤10% 0201≥104,0402≥333 0603≥104,0805≥684 1206≥225,1210≥475 DF≤12.5% 0402≥474 ■U_R≤16V, DF≤5.0% DF≤10%, 0201≥104,0402≥563 0603≥564,0805≥105 1206≥475,1210≥106 ■U_R≤10V, DF≤7.0% DF≤10% 01005,0201≥123 0402≥224,0603≥334 0805≥225,1206≥225 1210≥226 DF≤15%, 0201≥104,0402≥105 ■U_R=6.3V, DF≤10% DF≤15%, 0201≥104, 0402≥105 0603≥106, 0805≥475 1206≥476, 1210≥107 DF≤20%, 0402≥225 ■U_R=4V, DF≤15%	
		Y5V	■U_R≥50V, DF≤12.5% ■U_R=25V, DF≤7.0% DF≤9%,0402≥683,0603≥474 0805≥105,1206≥475 1210≥106 ■U_R=16V, DF≤15% ■U_R=10V, DF≤20% ■U_R≤6.3V, DF≤20%	
		高Q	Cp>30pF Q≥1000 1pF<Cp≤30pF Q≥400+20Cp Cp≤1pF Q≥300	
5	绝缘电阻(IR) Insulation Resistance	C0G	Ri≥10GΩ或500Ω·F, 取最小值 Ri≥10 GΩ或500Ω·F, whichever is smaller	施加电压：U_R≤400V $U_{测}$=U_R U_R>400V $U_{测}$=400V 充电时间：60±5秒 To apply voltage: U_R≤400V $U_{测}$=U_R U_R>400V $U_{测}$=400V Charge time: 60±5sec


■ 技术指标和实验方法 Specifications and Test Method

<table>
<tr><th>NO</th><th>项目
Item</th><th colspan="2">技术指标
Specification</th><th>实验方法
Test Method</th></tr>
<tr><td>5</td><td>绝缘电阻(IR)
Insulation
Resistance</td><td>X7R
X6S
X5R
Y5V
中高压</td><td>Ri≥4GΩ或100Ω・F(以下范围为50Ω・F)取较小值


Ri≥4 GΩ or 100Ω.F(50Ω・F of below range)，whichever is smaller

以下范围below range:
■50V: 0402≥104;0603≥225;
0805≥106;1206≥106
■25V: 0201≥104;0402≥224;
0603≥106;0805≥106;
1206≥226;01005(X6S/X5R)■16V: 0603≥106; 01005(X6S/X5R)■10V: 0201>104;
0603≥106;
0805≥476; 01005(X6S/X5R)■6.3V: 0201≥104;0603≥475;1206≥106;0100(X6SX5R)
■4V: 0603≥226;0805≥476;
1206≥107; 01005(X6SX5R)</td><td>施加电压：U_R≤400V $U_{测}$=U_R
U_R>400V $U_{测}$=400V
充电时间：60±5秒

To apply voltage: U_R≤400V $U_{测}$=U_R
U_R>400V $U_{测}$=400V
Charge time: 60±5sec</td></tr>
<tr><td>6</td><td>耐电压
Dielectric
Strength</td><td>C0G
X7R
X6S
X5R
Y5V</td><td>无介质击穿和材料裂缝
No dielectric breakdown or mechanical breakdown</td><td>施加电压：U_R<100V: 250%
100V≤U_R<1000V: 150%
U_R≥1000V:120%
测试时间：60±5秒,
最大电流：不超过50mA

To apply voltage: U_R<100V:250%;
100V≤U_R<1000V:150%;
U_R≥1000V:120%
Test time: 60±5sec,
Max current: should not exceed 50mA</td></tr>
<tr><td rowspan="3">*7</td><td rowspan="3">电容量温度系数或温度特性
Capatiance Temperature Coefficient Or Temperature Characteristics</td><td>C0G</td><td>温度系数≤0±30ppm/℃
Temperature coefficient within 0±30ppm/℃</td><td rowspan="3">按系列温度顺序测试电容容量
Measure capacitance under follow table list
<table><tr><td>步骤Step</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr><tr><td>C0G/X7R</td><td>25±2℃</td><td>-55±3℃</td><td>25±2℃</td><td>125±3℃</td><td>25±2℃</td></tr><tr><td>X6S/X5R</td><td>25±2℃</td><td>-55±3℃</td><td>25±2℃</td><td>85±3℃</td><td>25±2℃</td></tr><tr><td>Y5V</td><td>25±2℃</td><td>-30±3℃</td><td>25±2℃</td><td>85±3℃</td><td>25±2℃</td></tr></table>PS:C0G预先干燥：16-24小时.
C0G Prelinminary Drying for 16-24hr.
▸C=[(C_i-C_1)/(C_1*▸T)]*10^6或(or)
▸C=(C_i-C_1)/C_1*100%
C_i:1~5温度下的容值
Capacitance value at 1~5 temperature
▸T:温度变化量(Temperature variation)
▸T=Ti-T1</td></tr>
<tr><td>X7R
X6S
X5R</td><td>容量变化≤±15%
Capacitance change within ±15%</td></tr>
<tr><td>Y5V</td><td>容量变化≤+22%~-82%
Capacitance change within +22%~-82%</td></tr>
<tr><td>8</td><td>附着力
Adhesion</td><td>C0G
X7R
X6S
X5R</td><td>无明显的损伤或端电极脱落
No remarkable damage or removal of the terminations.</td><td>施加压力：5N(0201:2N; 01005:1N)
时间：10±1秒
Pressurizing force：5N(0201:2N; 01005:1N)
time：10±1sec

</td></tr>
</table>

■ 技术指标和实验方法 Specifications and Test Method

NO	项目 Item	技术指标 Specification		实验方法 Test Method
9	可焊性 Solderability	C0G X7R X6S X5R Y5V	端电极挂锡面积小于95% 95%min.coverage of both terminal electrodes	锡炉温度：245±5℃ 浸入时间: 2±1秒 Solder temperature:245±5℃ Dipping time: 2±1sec.
10	弯曲强度 Bending	外观 Appreance	无明显可见损伤 No remarkable visual damage	将电容安在测试夹具上，按图所示方向以1.0mm/s的速率施加压力，弯曲1mm. Solder the capacitor on testing substrate and putt on testing stand. The middle part of substrateshall successively be pressurized by pressuringrod at a rated of about 1.0mm/sec. Until the deflection become means of the 1.0mm. 
		容量变化 Cap change	C0G:±5%或±0.5pF，取较大值 X7R/X6S/X5R: ±12.5% Y5V: ±30% C0G:within ±5% or ±0.5pF, whichever is larger X7R/X6S/X5R: within ±12.5% Y5V: within ±30%	
*11	耐焊锡热 Resistance to Soldering Heat	外观 Appreance	无明显可见损伤 No remarkable visual damage	预热：120~150℃ 60秒 焊接温度：270±5%℃ 浸入时间：10±1秒 Preheating:120~150℃ 60sec Soldering temperature :270±5℃ Dipping time:10±1seconds
		容量变化 Cap change	C0G:±2.5%或±0.5pF,取较大值 X7R/X6S/X5R: ±15% Y5V: ±30% C0G:within ±2.5% or ±0.5pF, whichever is larger X7R/X6S/X5R: within ±15% Y5V: within ±30%	
		DF/IR	满足产品初始值得要求 Meets initial standard damage	
*12	温度快速循环 Temperature Cycle	外观 Appreance	无明显可见损伤 No remarkable visual damage	按下列步骤进行5次循环： To perform 5cycles of the stated environment 步骤 Step / 温度 Temperature / 时间 Time 1 / 下限温度+0/−3℃ Min.operating Temp.+0/−3℃ / 30min 2 / 25℃ / 2~3min 3 / 上限温度+3/−0℃ Min.operating Temp.+3/−0℃ / 30min 4 / 25℃ / 2~3min
		容量变化 Cap change	C0G:±2.5%或±0.25pF,取较大值 X7R/X6S/X5R: ±15% Y5V: ±30% C0G:within ±2.5% or ±0.25pF, whichever is larger X7R/X6S/X5R: within ±15% Y5V: within ±30%	
		DF/IR	满足产品初始值得要求 Meets initial standard damage	

NO	项目 Item	技术指标 Specification		实验方法 Test Method
*13	耐湿负荷 Damp heat with load	外观 Appreance	无明显可见损伤 No remarkable visual damage	测试温度：40±2℃ 相对湿度：90~95%RH 测试电压：额定电压（最大500V） 测试时间：500±12hrs Test temperature:40±2℃ Humidity:90~95% RH Voltage:100% of the rated voltage(max:500V) Testing time:500±12hrs
		容量变化 Cap change	C0G:±7.5%或±0.75pF,取较大值 X7R/X6S/X5R: ±25% Y5V: ±30%或-40%~+30% C0G:within ±7.5% or ±0.75pF, whichever is larger X7R/X6S/X5R: within ±25% Y5V:within ±30%或-40%~+30%	
		DF	初始值的2倍以下 Not more than 2 times of initial value	
		IR	Ri＞500MΩ或25Ω・F(☆为5Ω・F),取较小值 Ri＞500MΩ或25Ω・F(5Ω・F of ☆),whichever is smaller	
*14	耐久性 Life Test	外观 Appreance	无明显可见损伤 No remarkable visual damage	温度测试：上限类别温度±3℃ 测试电压：U_R＜100V 150% 100V≤U_R＜1000V 120% U_R≥1000V 100% 测试时间：1000小时 Test temperature:Max.Operating Temp.±3℃ Voltage: U_R＜100V 150% 100V≤U_R＜1000V 120% U_R≥1000V 100% Testing time：1000hrs
		容量变化 Cap change	C0G:±3%或±0.5pF,取较大值 X7R/X6S/X5R: ±25% Y5V: ±30%或-40%~+30% C0G:within ±3% or ±0.5pF, whichever is larger X7R/X6S/X5R: within ±25% Y5V:within ±30%或-40%~+30%	
		DF	初始值的2倍以下 Not more than 2 times of initial value	
		IR	Ri＞1G Ω或50Ω・F(☆为10Ω・F),取较小值 Ri＞1G Ω或50Ω・F(10Ω・F of ☆),whichever is smaller	

注：

*A.3.7.11.12.13.14项需对II类电容器做预处理(将电容器在160℃下热处理1小时)，然后在标准大气条件下恢复48±4小时，再测量初始值；

B.3.11.12.13.14项实验后在室温下放置24±2(C0G)或48±4(X7R、X6S、X5R、Y5V)小时以后再测量；

C.3.11.12.13.14项电性能测量的环境条件，温度：25℃±2℃ 相对湿度：25%~80%RH。

☆■100V:X7R

■50V:0402>103; 0603≥105;0805≥105;1206≥475;1210≥475

■25V:0201≧104;0402≥224 0603≥225; 0805≥225;1206≥106;1210≥106;01005(X6S/X5R)

■16V: 0201≧104;0402≥224;0603≥105; 0805≥225;1206≥106;1210≥476; 01005(X6S/X5R)

■10V: 0201≥473;0402≥474;0603≥474; 0805≥225;1206≥475;1210≥476; 01005(X6S/X5R)

■≤6.3V Class II; 01005(X6S/X5R)

Note：

A.3.7.11.12.13.14Item need to do the pretreatment of class II type capacitor(Perform a heat treatment at 160℃ for 1 hour), Then recovery the capacitor at standard pressure conditions for 48±4 hours,Perform the initial measurement

B.3.11.12.13.14Itme end of experiment Measurement to be made after being kept at room temperature for 24±2(C0G) or 48±4(X7R、X6S、X5R、Y5V)hrs.

C.3.11.12.13.14Item environmental conditions for electrical performance measurement,Temperature：25℃±2℃ Humidity: 25%~80%RH

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Sanyear:

C0603X5R106M100NT C1206X7R106M350NT SY0805BD2KP C1206X7R106K500NT
C1812X7S475K101NT C2220X7R105K251NT C0402X5R225M250NT C1210X5R107M250NT
C1210X7S226K250NT C1210X7S475K101NT SY1206AFR050 C0201X5R105K100NT
C0603X5R106M250NT C1206X5R106K500NT SY1206AFR005 SY1206AFR020 C0603COG102G500NT
C0402X5R105K100NT C0603COG222J500NT C0603X5R106K350NT C1206X5R476M160NT
C1210X5R106K500NT SY2512CFR400 C0201X5R104K160NT C0201X5R225K100NT
C0603X7R102J500NT C1210X7R475K101NT C0402X5R475K100NT C0805X5R226K160NT
C1210X7S106K500NT