
TE Connectivity: Every Connection Counts
© 2016 TE Connectivity Ltd. family of companies. All Rights Reserved

HARNESSING

HEAT SHRINK BOOTS

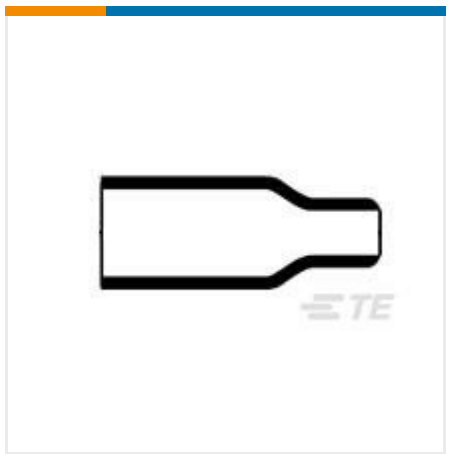

✔ Active

TE CONNECTIVITY (TE)

202A121-100-0

Raychem | CAP

202A121-100-0
TE Internal Number: 593512-000
Alias ID: 7-1194692-6

EU RoHS Compliant
EU ELV Compliant

Lipped No

Operating Temperature Range (°C) -30 – 105

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options S1030 Separate Adhesive, -80°C – 80°C (-112°F – 176°F), S1048 Separate Adhesive, -55°C – 105°C (-67°F – 221°F), S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F)

Material Systems Code 100

PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

Boot, Straight, Overexpanded
PDF
English

Product Specifications

Product Specification

Thermofit Zero Hal Polyolefin Molded Components Halogen-Free, Flame Retarded, Semi-Flexible, Heat-Shrinkable
PDF
English

Product Environmental Compliance

Safety Data Sheet

Downloaded from Arrow.com.

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

English

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Danish

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Dutch

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

English

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

French

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

German

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Italian

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Norwegian

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Spanish

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Swedish

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

English

FEATURES

Please review product documents or contact us for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped No

Downloaded from Arrow.com.

Body Features

Material Systems Code 100
Adhesive Pre-Coat No

Dimensions

Cable Diameter Range 5.3 – 17.8 mm [.209 – .701 in]
Wire/Cable Outside Diameter .236 in, .276 in, .3 in, .31 in, .35 in, .39 in, 10 mm, 6 mm, 7 mm, 8 mm, 9 mm

Usage Conditions

Operating Temperature Range (°C) -30 – 105
Flammability Low Fire Hazard

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No
Approved Standards BR1326 listed Class G, BS-G-198-5-DF, DEF Std 59-97 Issue 3 Type DF, IEC 62329-3-101

Other

Fluid/Chemical Resistance Suitable for occasional exposure to fluids
Adhesive Options S1030 Separate Adhesive, -80°C – 80°C (-112°F – 176°F), S1048 Separate Adhesive, -55°C – 105°C (-67°F – 221°F), S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F)
Adhesive Type Adhesive Purchased Separately

Statement of Compliance

Statement of Compliance
PDF

Downloaded from Arrow.com.