



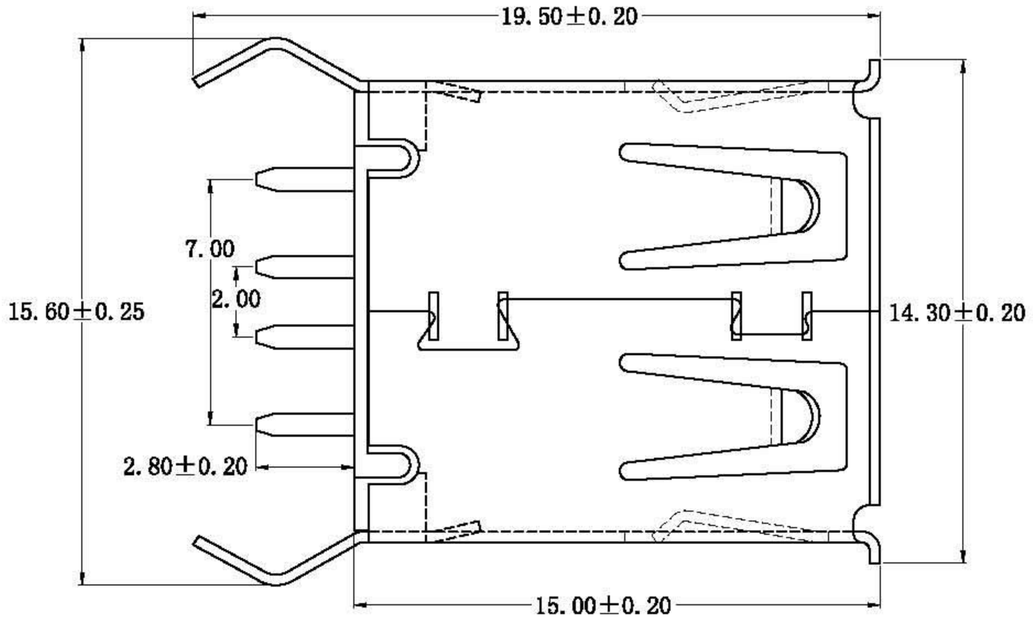

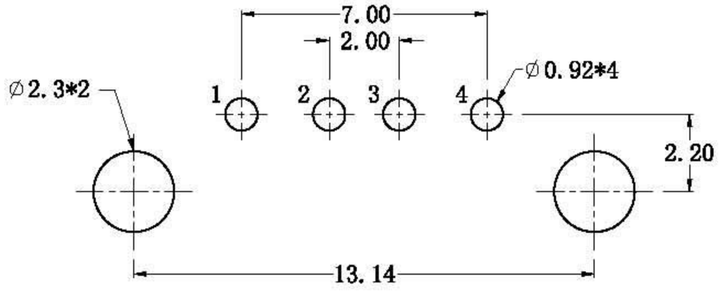

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流：Current Rating
   1.5A/contact terminal
2. 额定电压：Voltage Rating
   30V DC
3. 接触阻抗:Contact Resistance
   30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
   500 V AC AT Sea Levol
5. 绝缘阻抗:Lnsulation Resistance:
   1000MEGA ohms MIN

原材料:Matorial:

1. 塑胶:Housing:
   Hing Temperature Tnermaplastics,
   PBT/LCP White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Piated Gold in Mating Area;
   Tin On Solder Talls
2. 外壳:Shell:
   Nickel Plating

L&X 深圳市连欣科技有限公司 TEL：0755-33978030 FAX：0755-32937438		图号 (DWG NO)	4C	单位(UNIT)：MM
		版本 (REV)	A/1	比例(SCALE) 1:1
		日期 (DATE)	2009.12.17	
品名(ITEM NO)	USB A/F 180° DIP长体改脚(15.0)母座	设计 (DESIGN)	陈钦虎	未注公差 TOLERANCE UNSPECIFIED
料号(PART NO)	XUDF-0218-0151	审核 (CHECKED)		X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°
模号(MODEL NO)	UB001G	核准 (APPROVED)		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

szlianxin:

XDFH-0254-2*7P APCI0107-P001A WAFER MX3.0 XDWF-C3030WR-2*10P SIM 6PIN XDSM-06185-0412
XDFH-0259-2*13P XDFH-0254-2*12P WAFER MX3.0 XDWF-C3030WV-2*7P
WAFER XH2.54 XDWF-2501-02P XDPF-0205-20S 51146 SCT1254WR-S-6P HDMI AF XDHF-1901-0150
WAFER1.25 XDWF-1251-05P XDJK-0051-025 XDFH-0259-2*12P 51146 SCT1254WR-S-3P
APCI0164-P001A XDWF-0910-05P WAFER XH2.54 XDWF-2500-06P WAFER MX3.0 XDWF-C3030WV-2*2P
XDFH-0259-2*4P XDDB-1809-0816 WAFER PH2.0 XDWF-0920-04P WAFER XH2.54 XDWF-2500-02P
XDFH-0254-2*11P APCI0085-P005A WAFER MX3.0 XDWF-C3030WR-2*6P
WAFER MX3.0 XDWF-C3030WR-2*3P XDCR-1220-006 20455-030E-12 MINI PCI XDAP-0528-049