

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

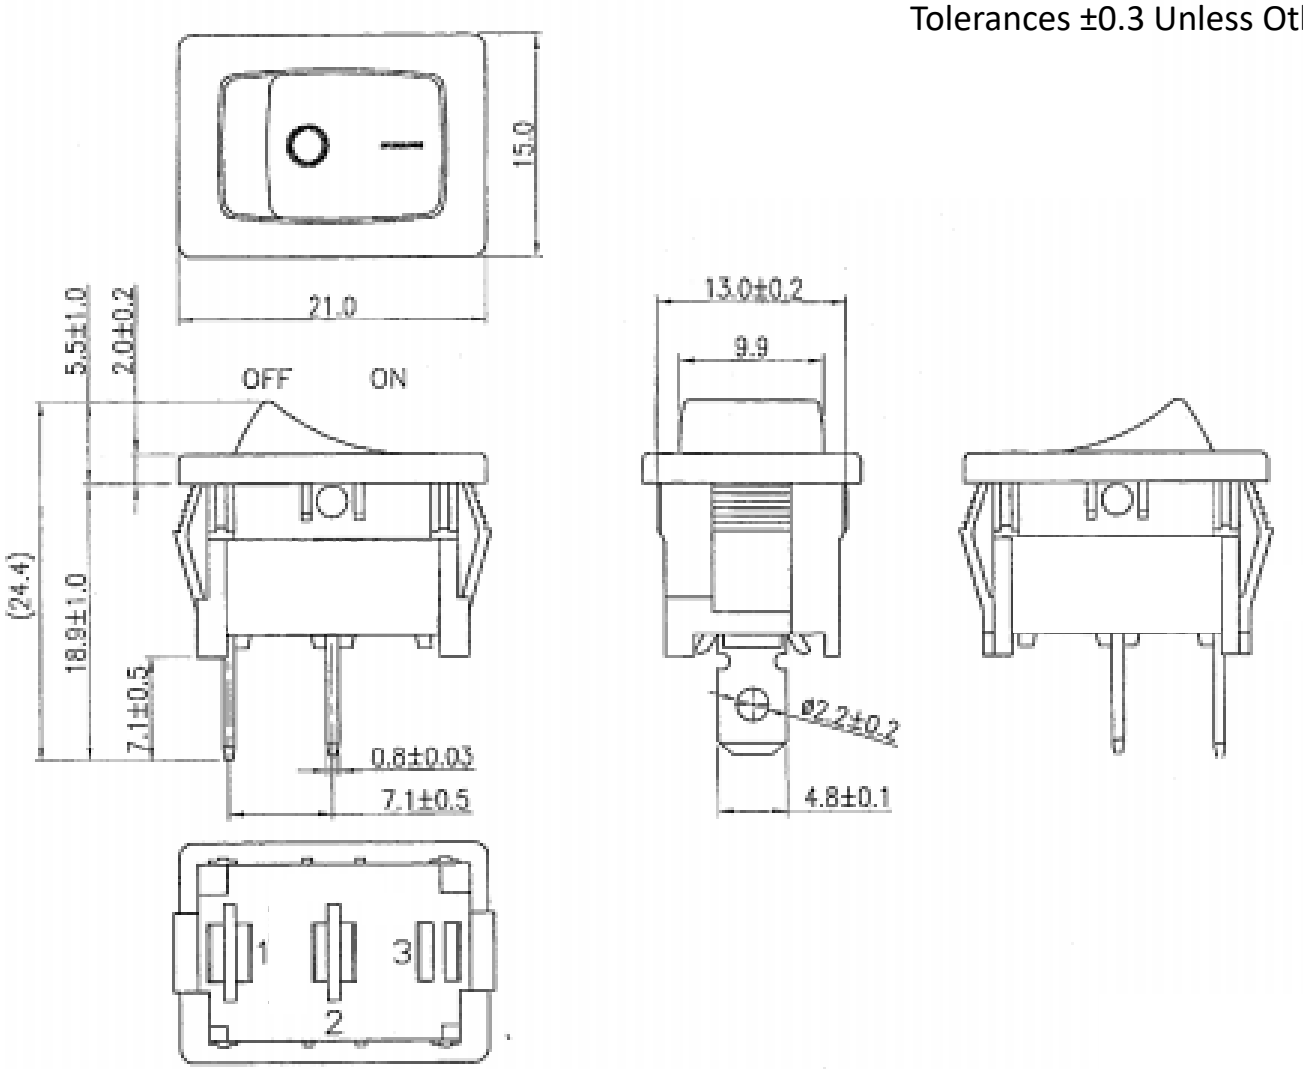


Mounting Hole

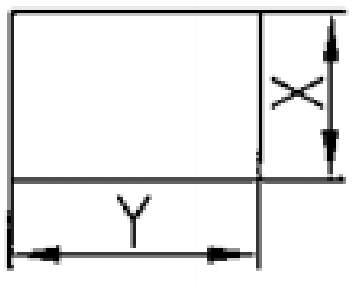

Thickness	X	Y
0.75~1.25	19.2+0.1	13+0.1
1.25~2	19.4+0.1	13+0.1
2~3	19.8+0.1	13+0.1

Circuit Diagram

2P SPST OFF-ON



Electrical Specifications

Rating	20A 12V DC 10A 24V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Red, Nylon 66
Printed	White, hot stamping

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RD2-1A-DC-1-AL RF3-1A-DC-2-GL SRA1-2F-DC-1-NN SB-1B-DC-3-B TA2-1G-DC-6-O TB1-2H-DC-6
PB-1B-DC-2-RIL RF1-1A-DC-2-B-3 SC-B SRA1-1A-DC-1-NN-2 TA2-1A-DC-5 TC6-P1-Z PB-1A-DC-2-RDL
SRB1-1G-DC-1-NN SRC1-1B-DC-1-B SRD2-2F-DC-1-RNN TA1-1A-DC-4 TE1-1F-DC-1-PB
RA4-2A-DC-2-AL RC-1A-DC-1-AL SRD2-1G-DC-1-BNN TE3-1A-DC-1-AL RG3-1A-DC-1-B SB-1B-DC-3-R
SRD1-2A-DC-1-BGN SRD2-2F-DC-1-BNN TE6-1A-DC-1-UL WR1 PB-1A-DC-2-B PD-1E-DC-9-UL