

ROHS

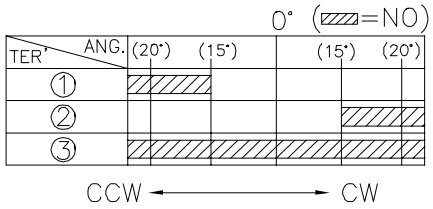



CODE TABLE



Circuit Diagram

NOTE:
Operating Force:
lever portion 100 ± 30 gf
Push portion 205 ± 50 gf

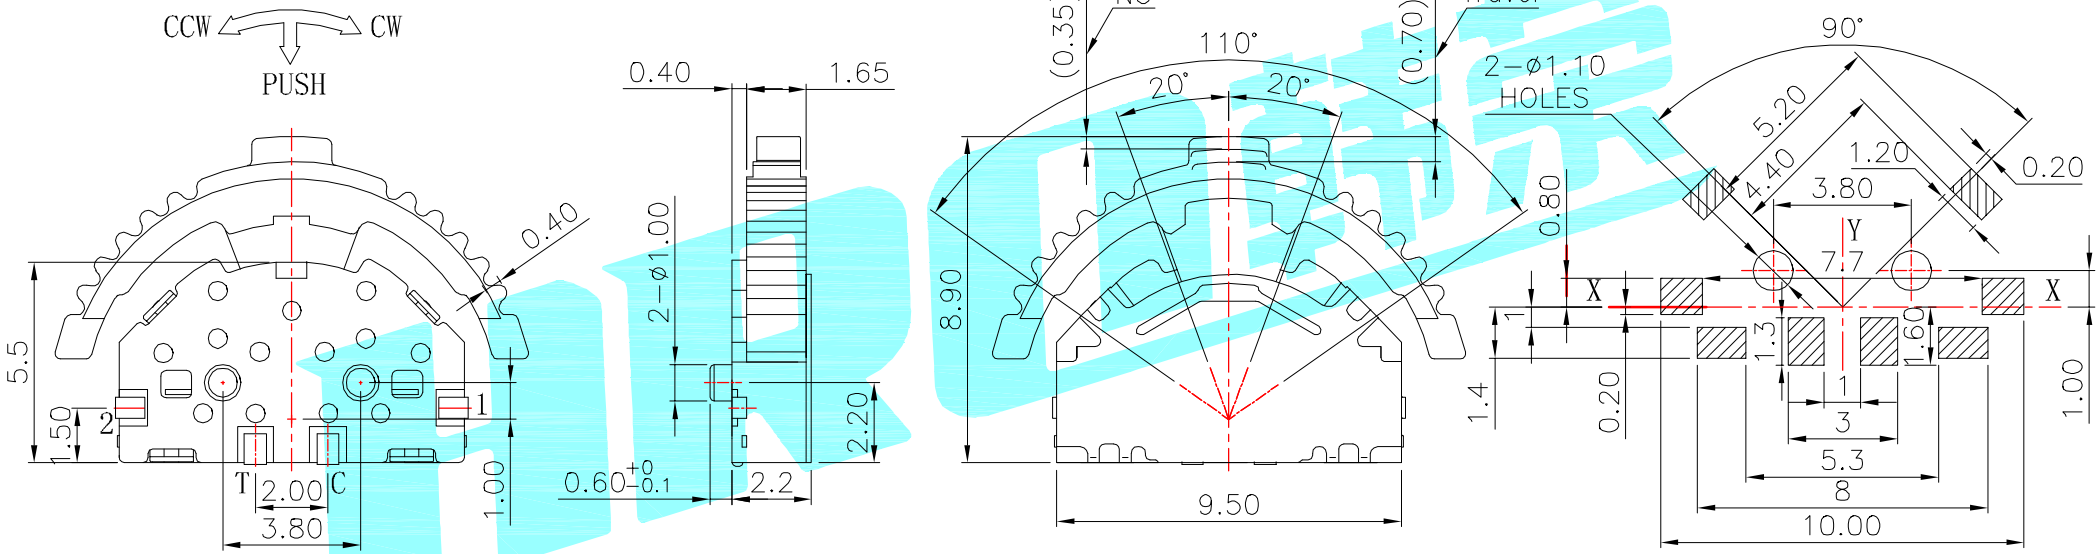

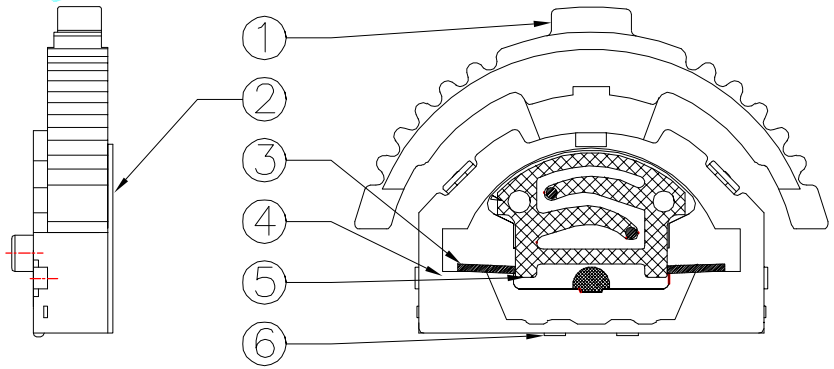

P.C.B Mounting
Pattern Dimension

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Contact	——	1	F.Ag/Brass	——	——
⑤	Terminal	——	4	Brass(0.15t)	Plating silver	——
④	Base	——	1	Nylon	Black	
③	Spring		1	SUS	——	
②	Cover	——	1	SUS	White	——
①	Keystoke	——	1	Nylon	Black	——

APPROVALS		DATE	HRO精荣® ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	2013/8/6		
CHECKED			TITLE:	MULTIFUNCTIONAL SWITCHS
APPROVALS			PART NO.	K1-1519SA-01
TOLERANCES ARE	30~以下 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	—— SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K2-1101DF-A4DW-01 SIM-08A DA-10RP DS-01BP K2-1102AT-A4CW-01 K2-1102BG-I4CW-01
K2-1102SP-A5SC-04 U-C-M5DW-W-1 K2-1102DP-G4SW-04 U-F-M5DD-W-L U-F-M5DS-Y-1 ES-07KP
K2-1102DP-S3SW-04 PJ-399B-6A TYPE-C-31-M-04 U-F-M5DD-Y-L1 DC-031A-10A DQ-03BP
K2-1818DP-A3SW-01 K3-2258S-E1 PJ-3250-5A U-F-M5SS-W-5 U-M-M5DD-W-2 U-C-M5SS-Y-1
U-F-M5DD-Y-L K3-1346S-F1 K5-1617SA-01 K2-1102SP-K4SC-04 K8-5851D-L1 SS-22D03-G4