

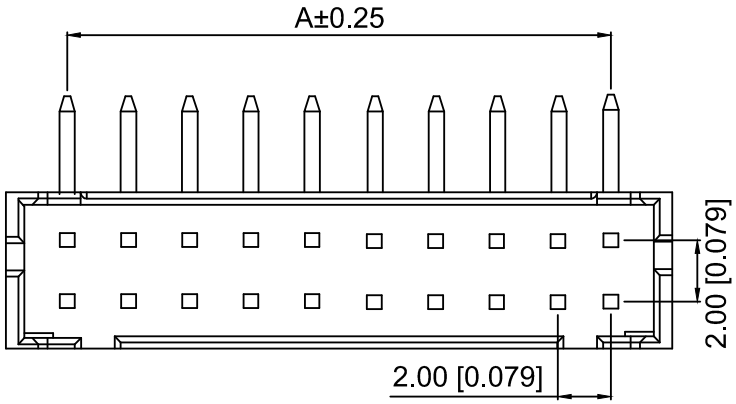


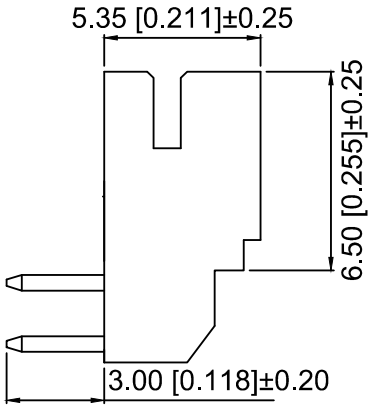


Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-40℃-+105℃
温度范围：-40℃-+105℃
Insulation resistance:1000MΩ min
绝缘电阻：1000MΩ Min
Contact resistance:10mΩ Max
接触电阻：10mΩ Max

X2026 ① W ② R ③ - 2x04 ④ - 46 ⑤ V01 ⑥

1.Series No
2.Category:W-Wafer
3.Welding Board Rangle:R-Stright 90°
4.Row No.Pin No:XX-2x02~2x20 Pin
5.Material:46-PA46 UL94V-0
6.Plating:V01-Gold 1u"

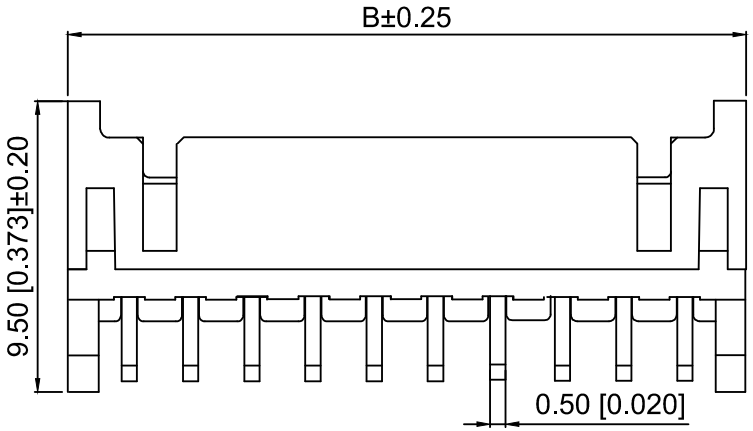

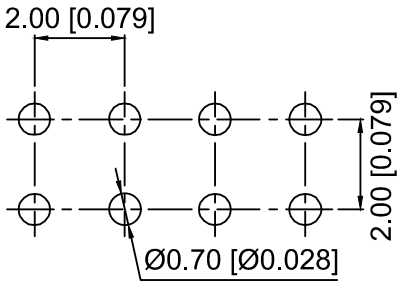

PCB LAYOUT

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2x02	2.00	6.00	2x12	22.00	26.00
2x03	4.00	8.00	2x13	24.00	28.00
2x04	6.00	10.00	2x14	26.00	30.00
2x05	8.00	12.00	2x15	28.00	32.00
2x06	10.00	14.00	2x16	30.00	34.00
2x07	12.00	16.00	2x17	32.00	36.00
2x08	14.00	18.00	2x18	34.00	38.00
2x09	16.00	20.00	2x19	36.00	40.00
2x10	18.00	22.00	2x20	38.00	42.00
2x11	20.00	24.00	/		

X2026WR-2x04-46V01	PA46	Brass	Gold 1u"	X2015H
PART N0	Material	Material(Pin)	Finish	Suitable XKB Housing

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN		VIEW:	PART NO.: X2026WR-2x04-46V01
CHKD		UNIT: mm/in	DWG NO.: X-X2026WR-2x04-46V01
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0