


ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

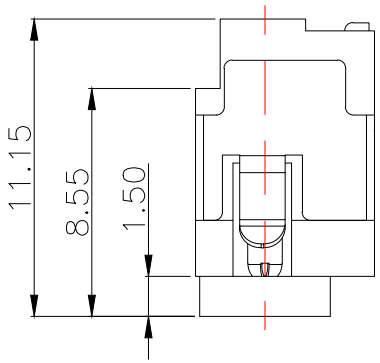


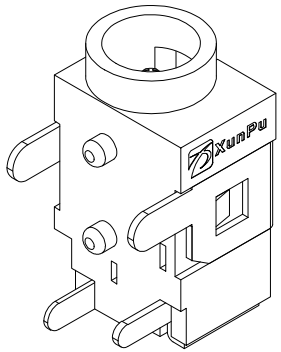




RECOMMEND PULG

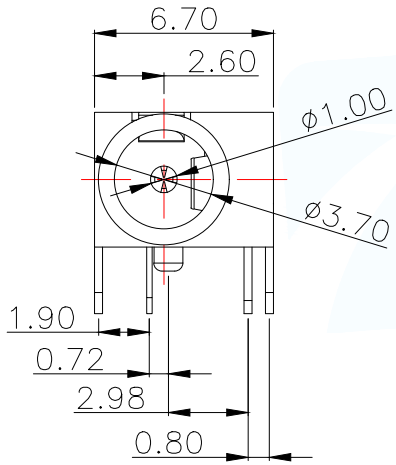


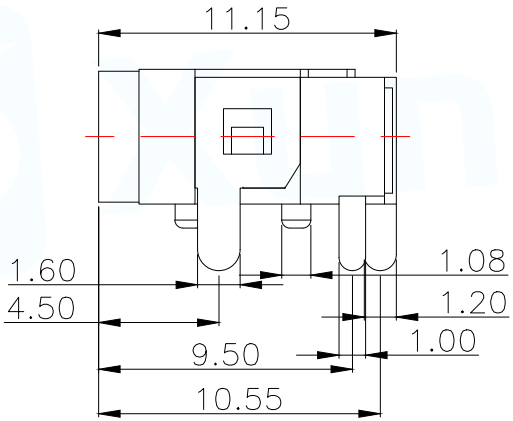

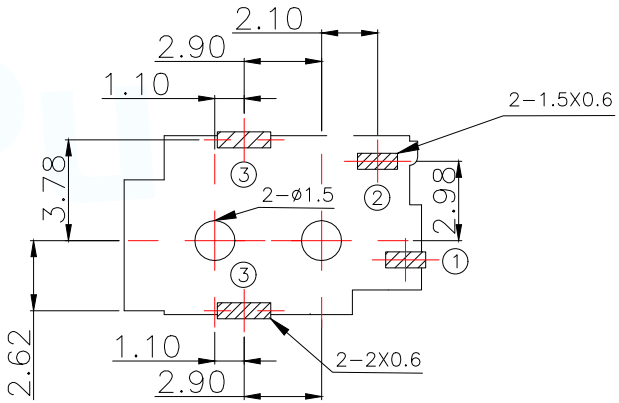

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance	
Rated electrical load	DC 12V 2A
Contact resistance	≤0.03Ω
Insulation resistance	≥100MΩ
Pressure resistance	AC 500V 1min
Insertion force	3-20N
Operating temperature range	-20C°~+70C°
service life	5000cycles



SCHEMATIC

LTR	PART NAME	QTY	MATERIAL	REMARK
3	HOUSING	1	PPA	BLACK
2	TIP SPRING	1	PHOSPHOR BRONZE	MB:CuSn PLATED
1	CENTER PIN	1	BRASS	MB:CuSn PLATED

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE: DC SOCKET		
		PAR	DC-031-A100	
		DWN		
		CHKD		
		APVD		
DECIMALS: X.X±0.30 X.XX±0.25 X.XXX±0.15	ANGLES: X.°±5° X.X°±1°	SCALE N:A	UNIT:MM	
	CUSTOMER COPY	SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

SMA-KWE-323C-H13X23-LW WAFER-MX1.25B-8PWB FPC-0.5AS-5PWCR-H20 WAFER-PH2.0-3PWB WAFER-PH2.0-8PLB FPC-0.5AX-30PWCR-H20 PHB2.0-02-20PZZ WAFER-PH2.0-2PJK DC-031A-A100 FPC-0.5HF-10PWBR-H20 WAFER-WBM4.2-16PJK-GB FPC-0.5FX-14PWCR-H20 FPC-0.5FX-4PWBH15 FPC-0.5FX-4PWCR-H20 FPC-1.0HF-4PWAR-H20 MU-103-ARW64 TYPEC-304YDSW-ACP16 FPC-1.0AX-4PWCR-H25 WAFER-GH1.25-6PLB WAFER-XH2.54-4PWZ-H62 FPC-0.5AX-24PWCR-H20 FPC-1.0AX-14PWCR-H25 RJ45-005-014-11 WAFER-PH2.0-6PWB WAFER-VH3.96-4PLB FPC-0.5AL-6PB FPC-0.5FX-16PWCR-H20 FPC-0.5FX-20PWBH15 HDMI-212L WAFER-PH2.0-11PZZ