


http://hcdz2017.com/


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

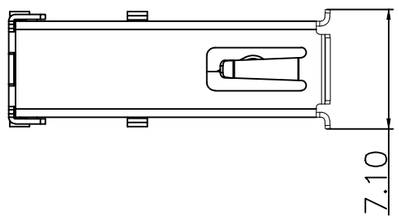


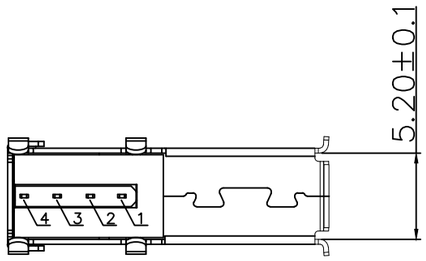


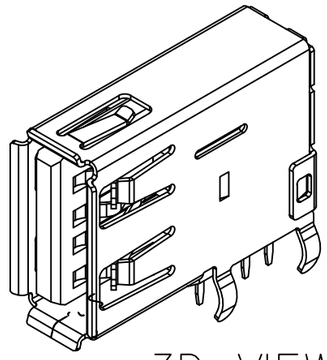


3D VIEW

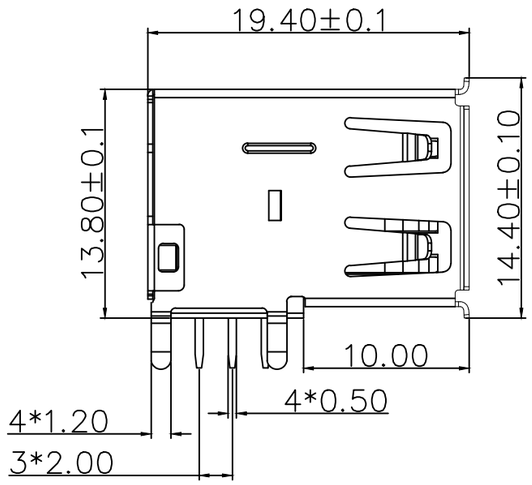


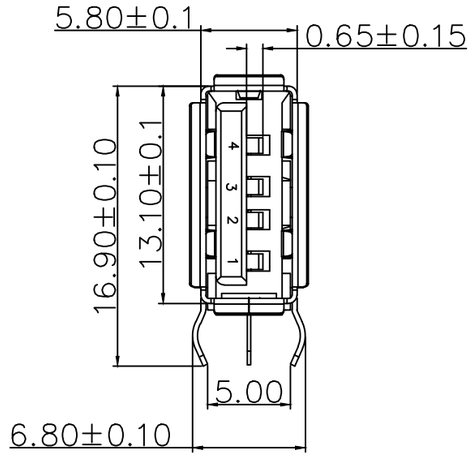



NOTES
1. MATERIAL:
   1.1. HOUSING: PBT ,COLOR IS BLACK;
   1.2. CONTACT: BRASS,T=0.20±0.02mm;
   1.3. SHELL: SPCC,T=0.3±0.02mm;
2. FINISH:
   2.1. TERMINAL:
   CONTACT AREA: GOLD PLATED G/Fu";
   SOLDER AREA: PLATED OVER TIN;
   2.2. SHELL: NI PLATED OVER ALL ;
3. RECINNEBDED PCB THICKNESS: 1.60mm;
4. ELECTRICAL:
   4.1. VOLTAGE RATING: 30 VAC RMS;
   4.2. CURRENT RATING: 1.5 AMP;
   4.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   4.4. WITHSTAND VOLTAGE: 500 VAC RMS
   50(60)Hz,1MIN.;
   4.5. INSULATION RESISTANCE: 100MEGOHMS MIN
   @500V DC;
5. MECHANICAL:
   5.1. MATING FORCE: 35N MAX.;
   5.2. UNMATING FORCE: 5~35N;
   5.3. OPERATING LIFE: 1500 CYCLES MIN.;
6. ENVIRONMENTAL:
   6.1. STORAGE TEMPERATURE RANGE: -40°C~+85°C
   6.2. OPERATION TEMPERATURE RANGE: -25°C~+70°C;
7. SALT SPRAY TEST:24H(EXCLUDING RIVETED BENDS)
8. SOLDERABILITY: 245±5°C,5±0.5S

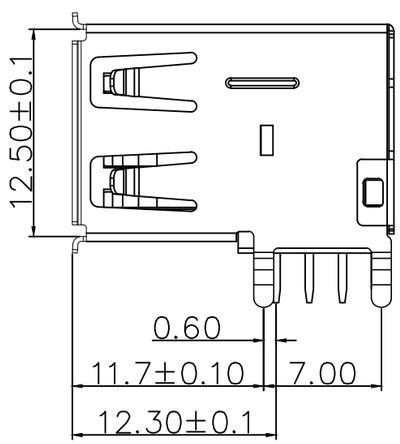



RECOMMEND PCB LAYOUT(±0.05)

3	外壳	铁	镀镍	
2	接触	铜	镀金	
1	基座	PBT	黑色	
序 号	品 名	材 质	电镀/颜色	备 注

深圳市虹成电子有限公司	品 名 TITLE	USB座	
	料 号 PART NO	HC-USB2.0-L195-02J	
UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30 ANGULAR: X.xx° ±1° X.x° ±3° X.° ±5°	比 列 SCALE	1:1	
	单 位 UNIT	MM	制 图 DRAW AhYe
	张 数 PART NO	1 OF 1	审 核 CHECKED 夏操云
	版 本 REV	A	批 准 APPROVE 赵亮亮

http://hcdz2017.com/

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HC-PM200-4.3H-2x8PS HC-USB3.0-C26 HC-FPC-0.5-6P-CSH20 HC-PZ254-11.5L-1x20PZ
HC-PZ254-11.5L-2x18PZ HC-PZ254-13.8L-1x6PWA HC-USB3.0-C34-P HCZZ0576-5
HC-PM254-8.5H-2x20PS HC-PZ254-11.5L-1x10PZ HC-USB2.0-L100-093P HCZZ0514-6 HC-PHB2.0-2x5A
HC-PZ127-7.2L-2x3PS HCZZ0001-2 HCZZ0001-6 HC-FPC-0.5-24P-FH20 HC-FPC-0.5-40P-FH20
HC-USB3.0-L175-2X1-J HC-USB3.0-L257-J HCZZ0451-6 HC-PM200-4.3H-2x20PZ HC-PM254-8.5H-1x21PZ
HCZZ0032-6 HCZZ0530-4 HC-PM254-5.0H-2x10PZ HCZZ0451-4 HC-FPC-0.5-10P-FH20
HC-FPC-0.5-50P-FHH20 HC-PHB2.0-2x4AW