www.lemo.com

FGG.1B.304.CLAD42Z

SUMMARY




Image is for illustrative purpose only

Wires

Low	4
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

Request a quote

Catalog

See video assembly instructions

Series	1B
Termination type	Male solder
IP rating	50
Cable Ø	3.10 - 4.20 mm
Status	active
Alternative part	
Matching parts	EGG.1B.304.CLL PHG.1B.304.CLLD42Z

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug, cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Variant	Z : Nut for fitting a bend relief
Weight	15.94 g

Performance

Configuration	1B.304 : 4 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	10 Amps

Specifications

Contact Type: Solder
Contact Dia.: 0.9 mm (0.035in)
Bucket Dia.: 0.8 mm (0.031in)

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Max. Solid Conductor: 0.34 mm^2 (AWG 22)
Max. Stranded Conductor: 0.34 mm^2 (AWG 22)
R (max): 4.8 mOhm
Vtest (contact-shell): 1450 V (AC), 2050 V (DC)
Vtest (contact-contact): 1350 V (AC), 1910 V (DC)

Others

Endurance (Shell): 5000
Temp (min / max): -55°C / +250°C
Humidity (max): <=95% [at 60 deg C /140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
Salt Spray Corrosion: >1000 hr
IP Rating: 50

DRAWINGS

Draws

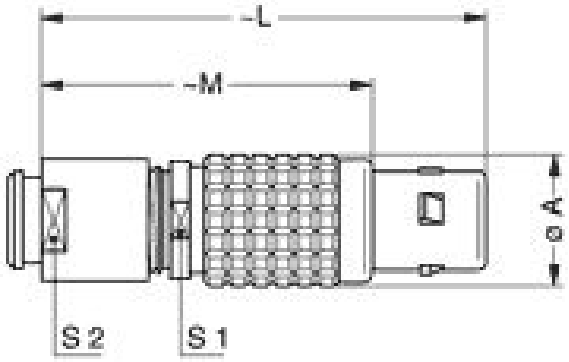





Dimensions

	A	L	M	S1	S2
mm.	12	42	31	10	9
in.	0,47	1,65	1,22	0,39	0,35

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1B.015.PA090
Caps: BFG.1B.100.PCSG

Cables

CMN.04.T28.031PGCE	PVC	GREY	
CMN.04.T28.031PGZE		Grey	
CMN.04.T28.031PNCE	PVC	Black	
CMN.04.T28.031PNZE			
CMN.04.T28.031QGC	TPR	Grey	
004 260	PTFE	White	
040 080	PVC	Black	
040 086	PVC	Blue	
040 140	PVC	Black	
040 240	PTFE	White	

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

LEMO:

FGG.0K.309.CLAC50Z FGG.1B.308.CLAZ PAC.M0.8GL.AC52R FFM.1B.131.LC FGG.2B.312.CYCD62 FGG.2T.316.CLAC80Z FMS.1M.305.XLM PKG.M0.4SL.LA EGG.1B.305.CLL EEG.0B.302.CLL EGG.0B.306.CLL FGG.0B.303.CLAD42 GMA.1B.054.DB EGG.0B.304.CLL PAC.M1.4GL.AC52R PAG.M0.8GL.AC65GZ EGG.0B.302.CLL FGG.0B.303.CYCD42 FGG.0B.304.CLAD56Z FGG.2B.302.CLAD62Z GMA.2B.071.RR PAC.M0.4GL.AC65V PKA.M1.0SL.NV FGG.0B.302.CLAD52Z FGG.1B.306.CLAZ GMA.0B.045.DG PAC.M0.4GL.AC52V DCH.91.141.PA FFS.2B.275.ZTCE31 FGG.0B.560.ZZC