STRADELLA-8-HV-HB-W

~85° wide beam for industrial applications. Variant with improved creepage distance for high voltage circuit designs.



SPECIFICATION:

Dimensions	49.5 x 49.5 mm
Height	7.1 mm
Fastening	pin, screw
ROHS compliant	yes


MATERIALS:

Component	Type	Material	Colour	Finish	Length
STRADELLA-8-HV-HB-W	Multi-lens	PMMA	clear		49.5

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15985_STRADELLA-8-HV-HB-W » Box size: 480 x 280 x 300 mm	800	160	160	6.0

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

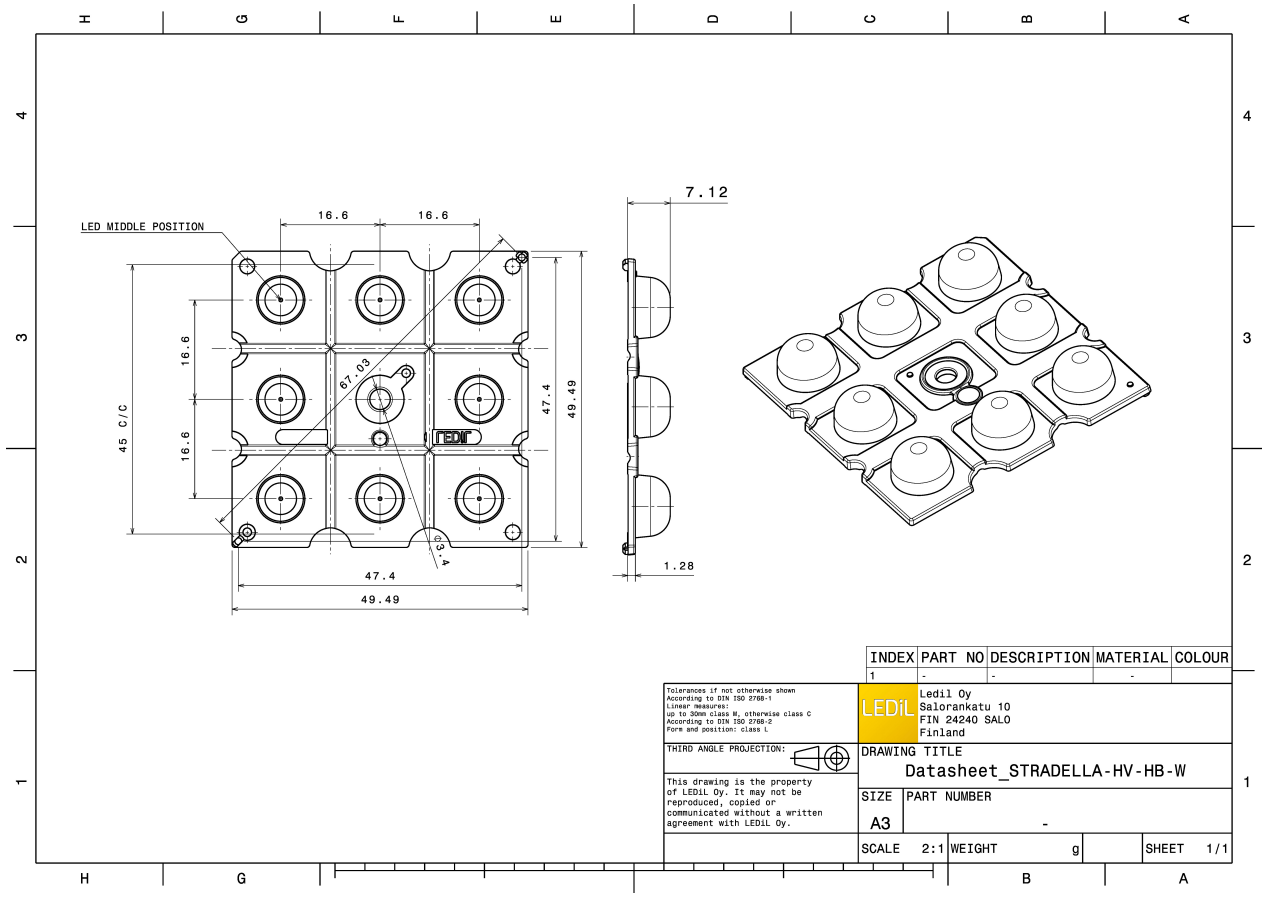

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	-	-	-	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
up to 30mm class H, otherwise class C
According to DIN ISO 2768-2
Form and position: class L

THIRD ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE
Datasheet_STRADELLA-HV-HB-W

SIZE	PART NUMBER
A3	-

SCALE	WEIGHT	SHEET
2:1	g	1/1


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):

CREE LEDs

LED	J Series 3030
FWHM / FWTM	92.0° / 133.0°
Efficiency	97 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



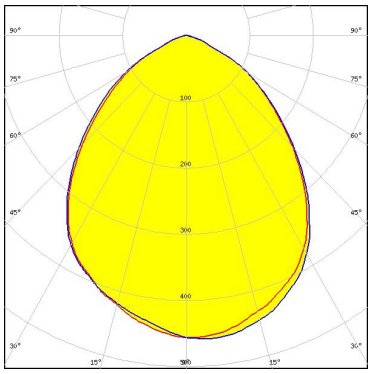


Light distribution files

CREE LEDs

LED	XD16
FWHM / FWTM	104.0° / 146.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



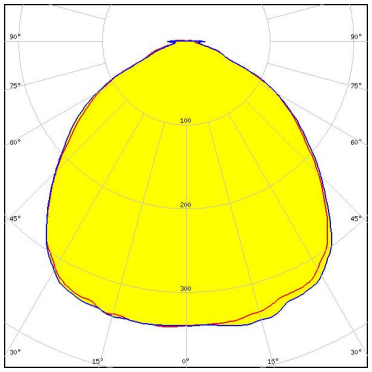


Light distribution files

CREE LEDs

LED	XT-E
FWHM / FWTM	92.0° / 141.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



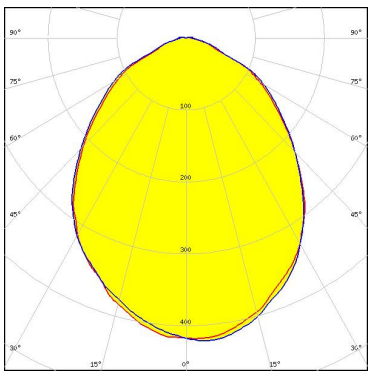

Light distribution files


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

LUMINUS

LED	SST-10-B130
FWHM / FWTM	99.0° / 137.0°
Efficiency	95 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	Deep Red
Required components:	



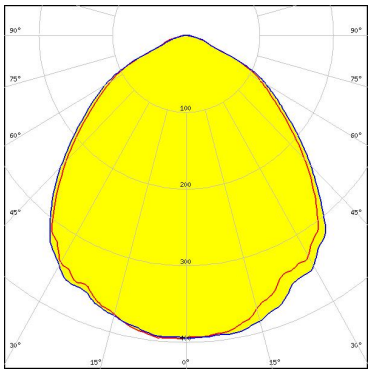


Light distribution files

NICHIA

LED	NF2W585AR
FWHM / FWTM	102.0° / 142.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



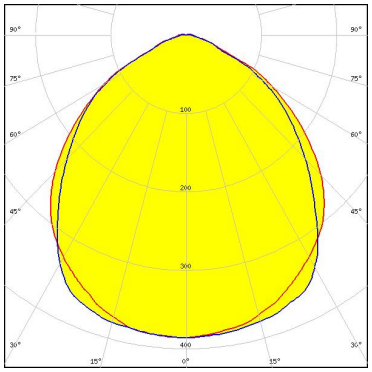


Light distribution files

OSRAM
Opto Semiconductors

LED	OSCONIQ S 3030 (QSLR31)
FWHM / FWTM	92.0° / 132.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



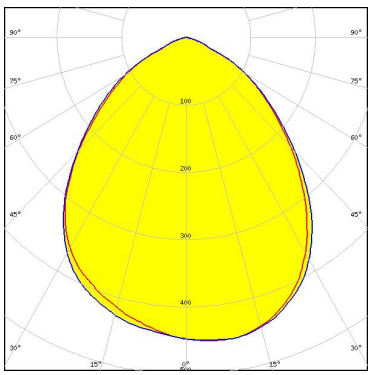

Light distribution files


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

PHILIPS

LED	Fortimo FastFlex LED 4x8up PR G5
FWHM / FWTM	90.0° / 131.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



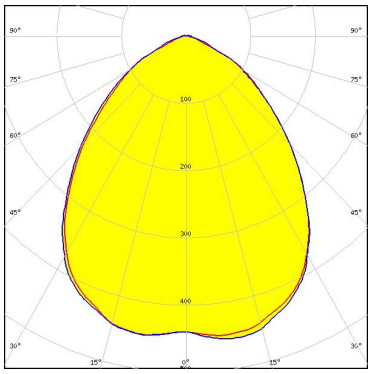


Light distribution files

SAMSUNG

LED	LH151B
FWHM / FWTM	96.0° / 139.0°
Efficiency	95 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	




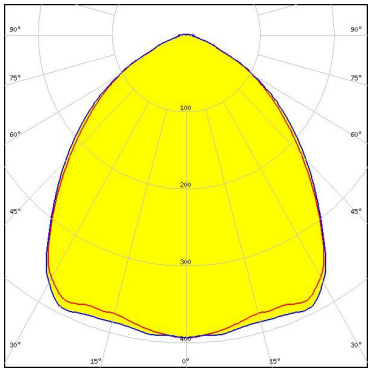


Light distribution files

SEOUL SEMICONDUCTOR

LED	SEOUL DC 3030C
FWHM / FWTM	92.0° / 132.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

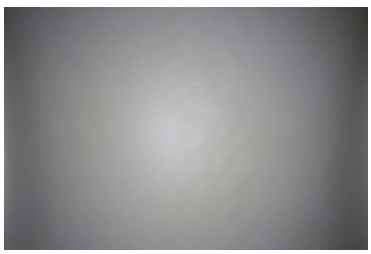

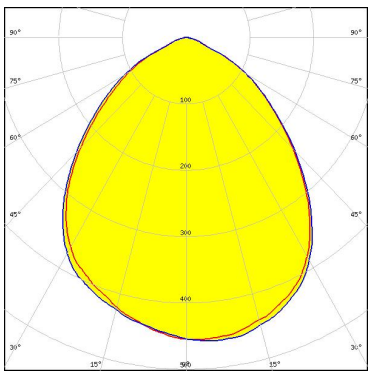

Light distribution files


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

SEOUL SEMICONDUCTOR

LED	Z5M3
FWHM / FWTM	96.0° / 139.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



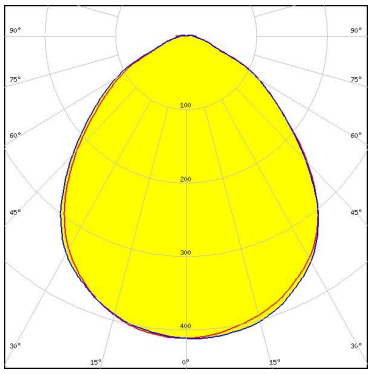


Light distribution files

SEOUL SEMICONDUCTOR

LED	Z5M4
FWHM / FWTM	94.0° / 126.0°
Efficiency	98 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



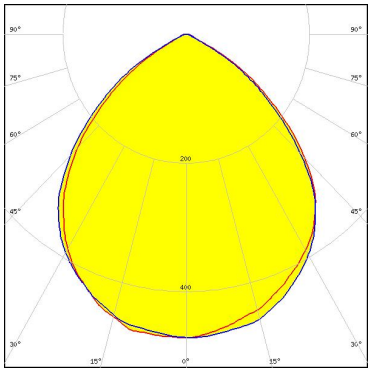

Light distribution files

SEOUL SEMICONDUCTOR

LED	Z8Y19
FWHM / FWTM	100.0° / 142.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs


LED	XP-G2 HE
FWHM / FWTM	92.0° / 132.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

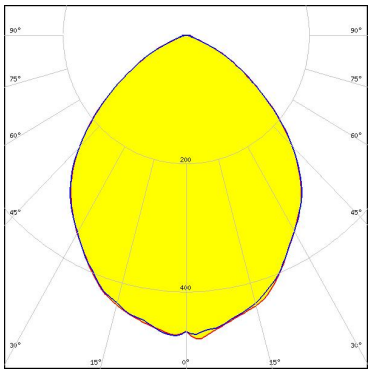

Light distribution files

CREE LEDs

LED	XP-G3
FWHM / FWTM	96.0° / 138.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

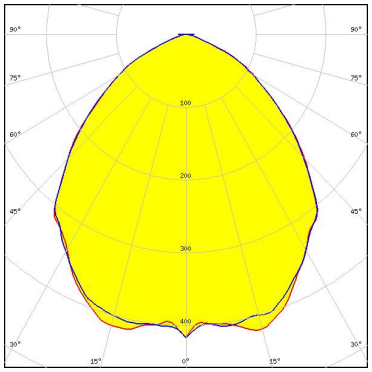

Light distribution files

CREE LEDs

LED	XP-G3
FWHM / FWTM	94.0° / 141.0°
Efficiency	91 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs

LED	XT-E
FWHM / FWTM	87.0° / 141.0°
Efficiency	92 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

LUMILEDS

LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	87.0° / 130.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

LUMILEDS

LED	LUXEON 3535L HE
FWHM / FWTM	80.0° / 131.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

LUMILEDS


LED	LUXEON CZ
FWHM / FWTM	52.0° / 122.0°
Efficiency	96 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

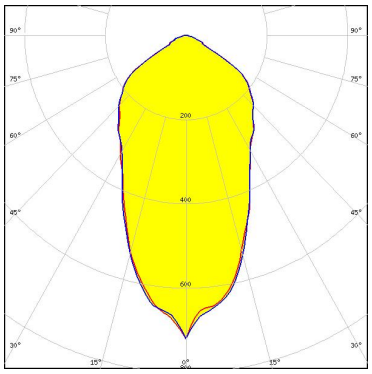

Light distribution files

LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	93.0° / 136.0°
Efficiency	97 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

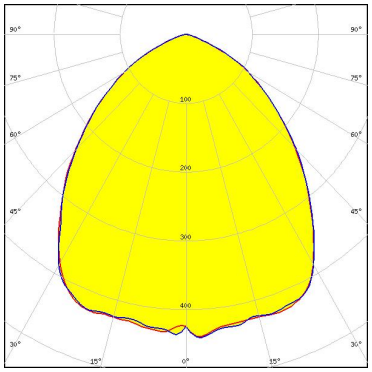

Light distribution files

LUMILEDS

LED	LUXEON HR30
FWHM / FWTM	82.0° / 130.0°
Efficiency	93 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):


LUMILEDS

LED	LUXEON TX
FWHM / FWTM	84.0° / 139.0°
Efficiency	92 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

NICHIA

LED	NVSW519A
FWHM / FWTM	93.0° / 130.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

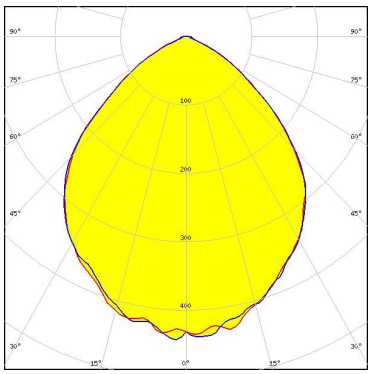

Light distribution files

NICHIA


LED	NVSxx19B/NVSxx19C
FWHM / FWTM	95.0° / 134.0°
Efficiency	91 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED	OSCONIQ C 2424
FWHM / FWTM	92.0° / 134.0°
Efficiency	97 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

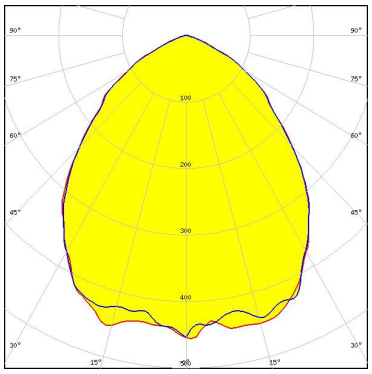

Light distribution files

OSRAM
Opto Semiconductors

LED	OSCONIQ C 3030
FWHM / FWTM	90.0° / 132.0°
Efficiency	87 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

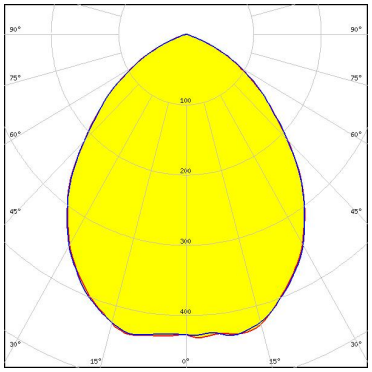


Protective plate, glass

Light distribution files

OSRAM
Opto Semiconductors

LED	OSCONIQ C 3030
FWHM / FWTM	90.0° / 134.0°
Efficiency	97 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

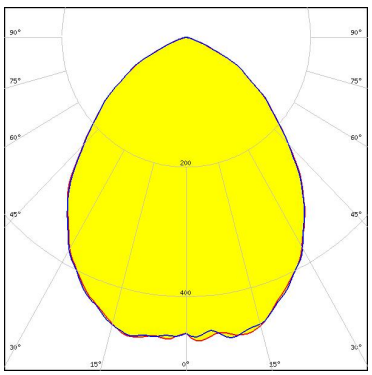


Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED	OSCONIQ P 3030
FWHM / FWTM	82.0° / 132.0°
Efficiency	97 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

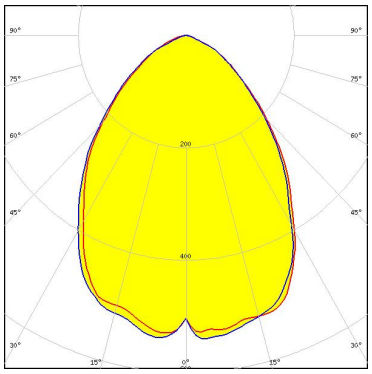

Light distribution files

OSRAM
Opto Semiconductors


LED	OSLON Pure 1414
FWHM / FWTM	92.0° / 133.0 + 134.0°
Efficiency	97 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

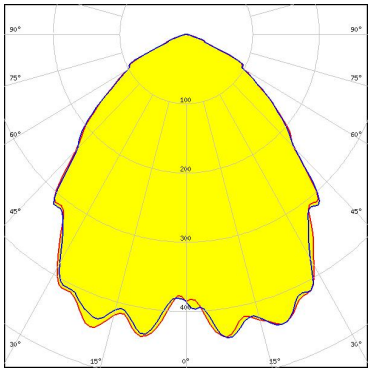

Light distribution files

OSRAM
Opto Semiconductors

LED	SFH 4715AS
FWHM / FWTM	71.0° / 109.0°
Efficiency	96 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	IR
Required components:	

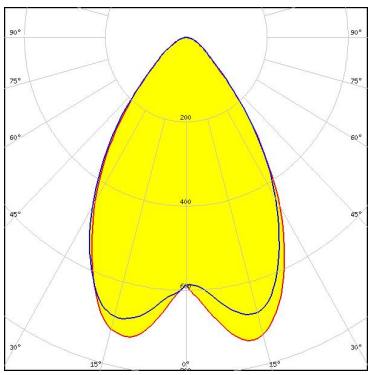


Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED	LH181A
FWHM / FWTM	97.0° / 143.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

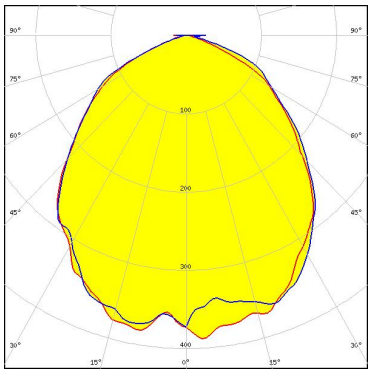

Light distribution files

SAMSUNG


LED	LH181B
FWHM / FWTM	89.0° / 135.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

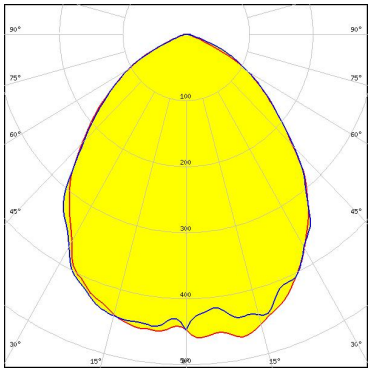

Light distribution files

SEOUL SEMICONDUCTOR

LED	Z8Y22T
FWHM / FWTM	90.0° / 137.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

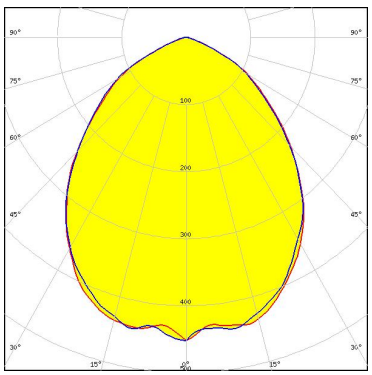

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/
where_to_buy

Shipping locations
Poznan, Poland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

LEDiL:

C12948_LENA-WAS CA12816_LXP2-RS2 F15541_JENNY-60 C14146_LENA-STD-BASE-CXA18
C16906_ALISE-70-WW FN15973_RONDA-REC-60-C FP13029_LISA2-WW-CLIP FP13031_LISA2-W-CLIP
LURR3000G3 C11191_TUIJA-3-W C12692_LENA-STD-BASE-CLL040 C18429_ADELIA-75-W
CA11391_EMILY-M2 CA18090_LEILA-Y-SS CA18093_LEILA-Y-WW C11347_REGINA
C11679_ANNA-50-7-M C13118_STRADA-SQ-A-T FA10751_LO2-RS C11716_ANNA-40-7-S
F14534_ANGELETTE-WW FCN15499_RONDA-W C13301_STRADA-2X2-T3 CA15584_ZORYA-MINI-TAPE
F14686_G2-ROSE-UV-M FCN13552_CRYSTAL-RS FCN15621_RONDA-W C17247_ELLA-30-M
CA18107_TINA-Y-O FP18205_LISA3CSP-WW-CLIP16