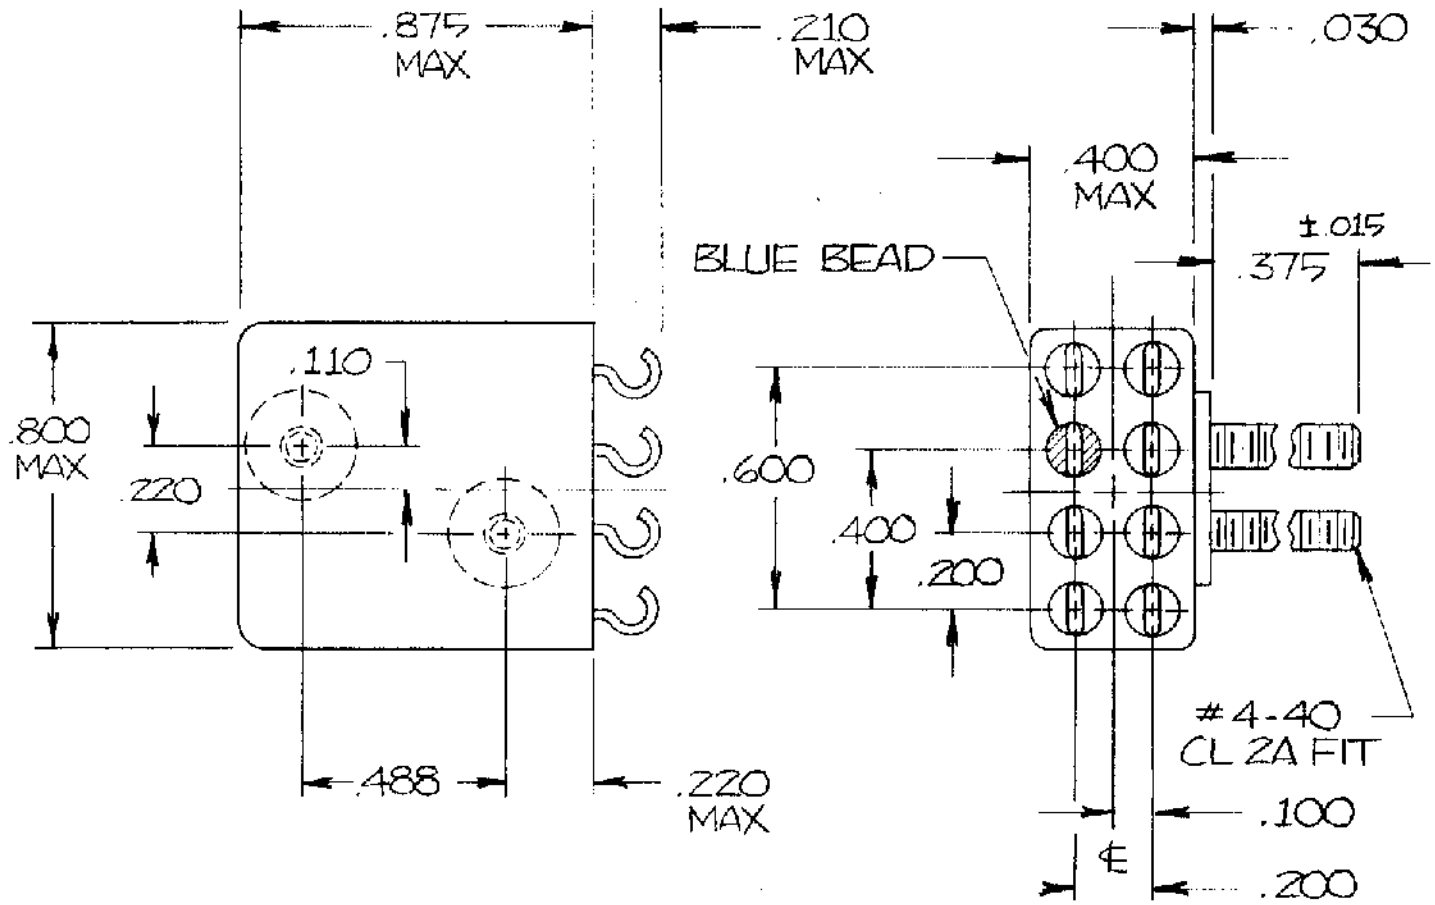


COIL:

RESISTANCE	675 Ω ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	2.3 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65° °C TO +125° C

NOTES:

CUSTOMER DATA SHEET

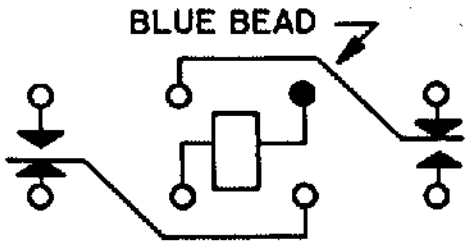

CONTACT RATING: 2A 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 1-18-90 CK. 1/18/90

Communications Instruments, Inc.

CUST. QPL
CUST. NO. M5757/10-015

TYPE "FW" RELAY

FW1167G03

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2834055-1 ROX05SJ18R 141991-2 2310537-1 RH73H2A40MKTN SBCHE64R7K U5254-000005-030PA
2377783-2 3-1393225-0 936348-1 CRGCQ2010J3K3 SMW73R0JT 1-794222-0 1-962915-1 1903112-2
1969656-1 CPF0402B37K4E1 SBCHE154R7K 1743455-2 175977-2 2380312-2 3631B101LL 650075-000
917696-1 TE50BR39J 2005330-1 MPT100C18RF 1393431-1 2-292161-3 3430B2F51RTDF