

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

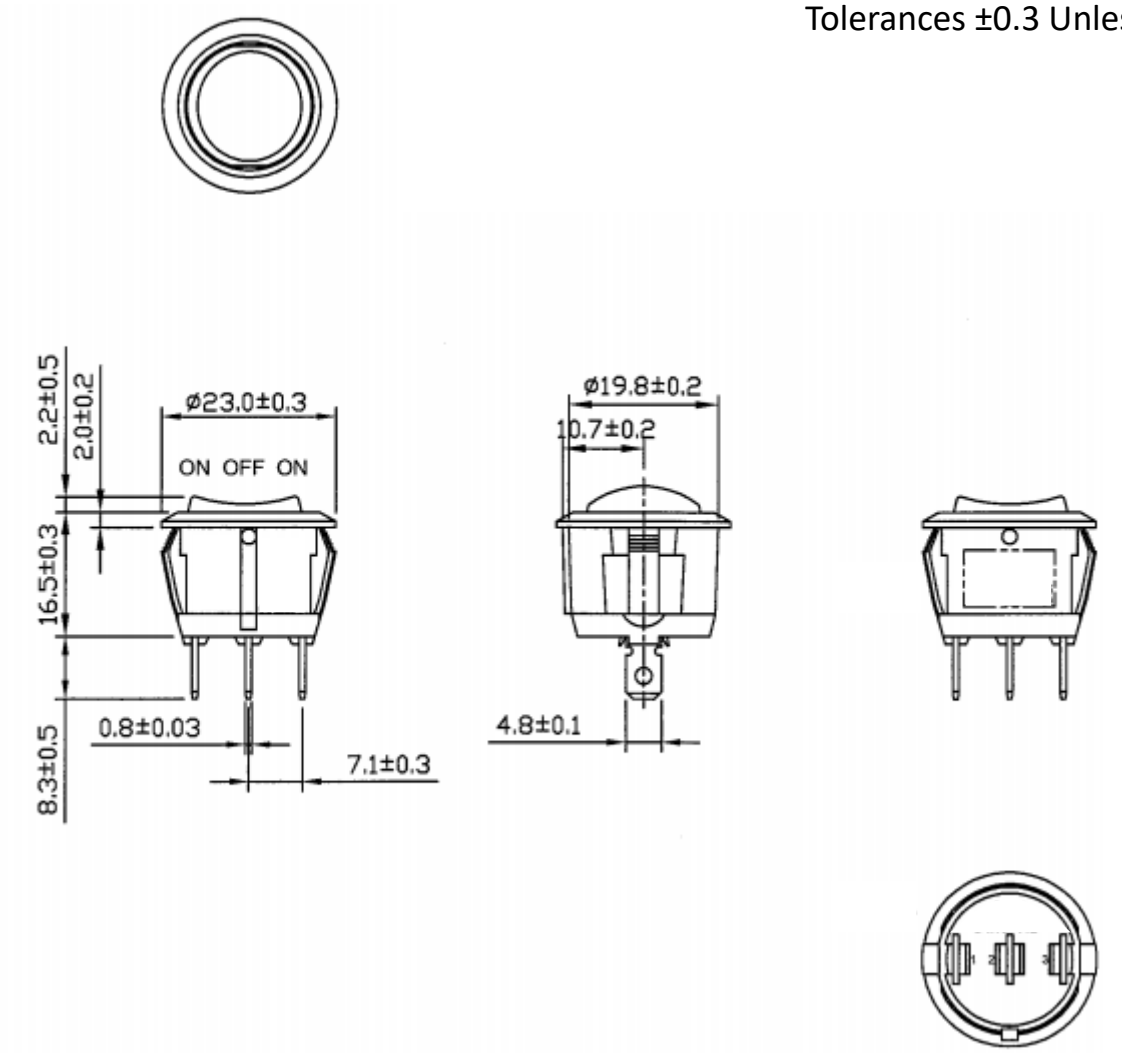


Mounting Hole

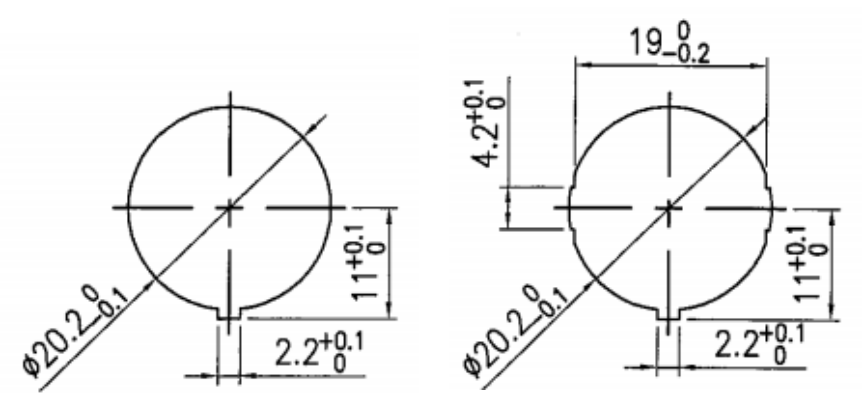

Thickness: 2.0~3.0 Thickness: 0.7~3.0

Circuit Diagram

3P SPDT ON-OFF-ON



Electrical Specifications

Rating	20A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66
Terminals	Copper alloy, Silver plating

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SRA1-2F-DC-1-NN TA1-1A-DC-4 TB1-2H-DC-6 TE1-1F-DC-1-PB SB-1B-DC-3-R PD-1E-DC-9-UL RF3-1A-DC-2-GL SRB1-1G-DC-1-NN SRD2-2F-DC-1-RNN TE6-1A-DC-1-UL PB-1A-DC-2-B PB-1B-DC-2-RIL SRA1-1A-DC-1-NN-2 SRD2-2F-DC-1-BNN RA4-2A-DC-2-AL SRD2-1G-DC-1-BNN TA2-1G-DC-6-O TA2-1A-DC-5 TC6-P1-Z TE3-1A-DC-1-AL RC-1A-DC-1-AL RD2-1A-DC-1-AL RG3-1A-DC-1-B WR1 PB-1A-DC-2-RDL SRC1-1B-DC-1-B SRD1-2A-DC-1-BGN SC-B RF1-1A-DC-2-B-3 SB-1B-DC-3-B