
IXYS

GigaMOS™ Power MOSFET


IXFN230N20T

V_{DSS} = 200V
I_{D25} = 220A
$R_{DS(on)}$ ≤ 7.5mΩ
t_{rr} ≤ 200ns

N-Channel Enhancement Mode
Avalanche Rated
Fast Intrinsic Diode



miniBLOC, SOT-227
E153432



G = Gate D = Drain
S = Source

Either Source Terminal S can be used as the Source Terminal or the Kelvin Source (Gate Return) Terminal.

Symbol	Test Conditions		Maximum Ratings	
V_{DSS}	T_J = 25°C to 175°C		200	V
V_{DGR}	T_J = 25°C to 175°C, R_{GS} = 1MΩ		200	V
V_{GSS}	Continuous		±20	V
V_{GSM}	Transient		±30	V
I_{D25}	T_C = 25°C (Chip Capability)		220	A
$I_{L(RMS)}$	External Lead Current Limit		200	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}		630	A
I_A	T_C = 25°C		100	A
E_{AS}	T_C = 25°C		5	J
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 175°C$		20	V/ns
P_D	T_C = 25°C		1090	W
T_J			-55 ... +175	°C
T_{JM}			175	°C
T_{stg}			-55 ... +175	°C
V_{ISOL}	50/60 Hz, RMS	t = 1 minute	2500	V~
	$I_{ISOL} \le$ 1mA	t = 1 second	3000	V~
M_d	Mounting Torque		1.5/13	Nm/lb.in
	Terminal Connection Torque		1.3/11.5	Nm/lb.in
Weight			30	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 3mA	200			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 8mA	3.0		5.0	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			50	μA
	T_J = 150°C			3	mA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 60A, Note 1			7.5	mΩ

Features

- International Standard Package
- miniBLOC, with Aluminium Nitride Isolation
- Isolation voltage 2500 V~
- High Current Handling Capability
- Fast Intrinsic Diode
- Avalanche Rated
- Low $R_{DS(on)}$

Advantages

- Easy to Mount
- Space Savings
- High Power Density


Applications

- Synchronous Recification
- DC-DC Converters
- Battery Chargers
- Switched-Mode and Resonant-Mode Power Supplies
- DC Choppers
- AC Motor Drives
- Uninterruptible Power Supplies
- High Speed Power Switching Applications

© 2014 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 10V, I_D = 60A, Note 1	90	150		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		24		nF
C_{oss}			2440		pF
C_{rss}			60		pF
R_{Gi}	Gate Input Resistance		1.15		Ω
$t_{d(on)}$	**Resistive Switching Times** V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = I_D = 0.5 • I_{D25} R_G = 1Ω (External)		58		ns
t_r			38		ns
$t_{d(off)}$			62		ns
t_f			17		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		358		nC
Q_{gs}			138		nC
Q_{gd}			60		nC
R_{thJC}				0.138	°C/W
R_{thCS}			0.15		°C/W

SOT-227B (IXFN) Outline

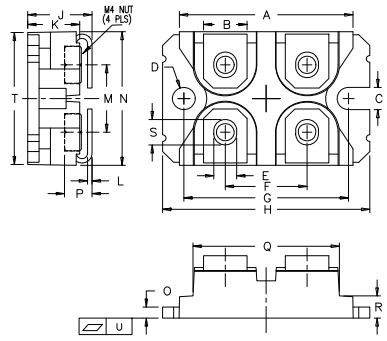

(M4 screws (4x) supplied)

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	1.240	1.255	31.50	31.88
B	.307	.323	7.80	8.20
C	.161	.169	4.09	4.29
D	.161	.169	4.09	4.29
E	.161	.169	4.09	4.29
F	.587	.595	14.91	15.11
G	1.186	1.193	30.12	30.30
H	1.496	1.505	38.00	38.23
J	.460	.481	11.68	12.22
K	.351	.378	8.92	9.60
L	.030	.033	0.76	0.84
M	.496	.506	12.60	12.85
N	.990	1.001	25.15	25.42
O	.078	.084	1.98	2.13
P	.195	.235	4.95	5.97
Q	1.045	1.059	26.54	26.90
R	.155	.174	3.94	4.42
S	.186	.191	4.72	4.85
T	.968	.987	24.59	25.07
U	-.002	.004	-0.05	0.1

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			230	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			920	A
V_{SD}	I_F = 60A, V_{GS} = 0V, Note 1			1.3	V
t_{rr}	I_F = 115A, V_{GS} = 0V			200	ns
Q_{RM}	-di/dt = 100A/μs		0.74		μC
I_{RM}	V_R = 75V		10.6		A

Note 1: Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

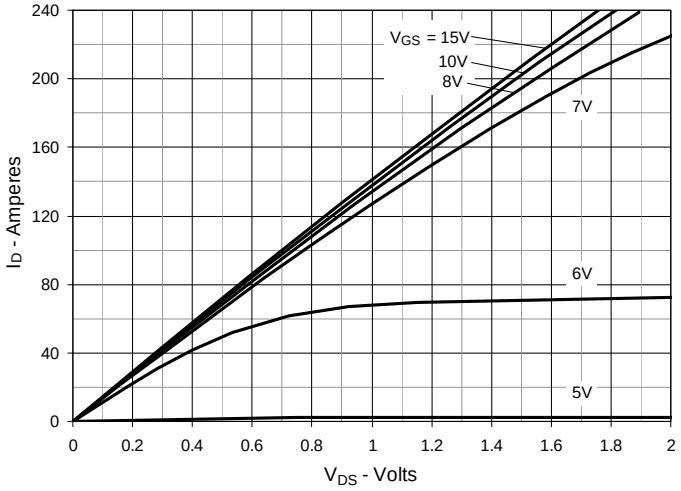


Fig. 2. Extended Output Characteristis @ T_J = 25ºC

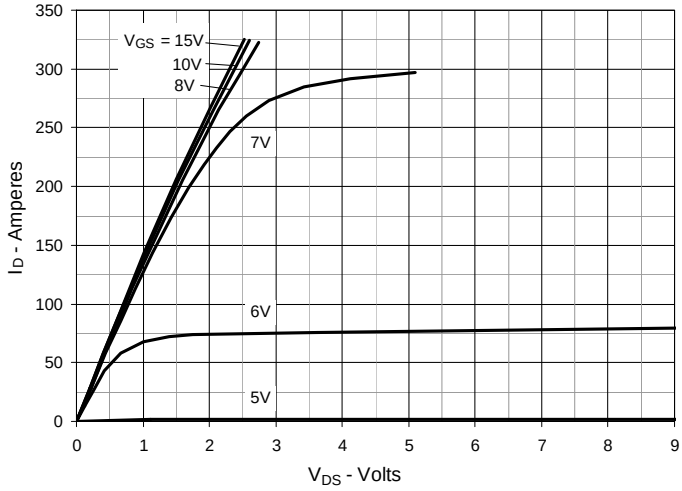


Fig. 3. Output Characteristics @ T_J = 150ºC

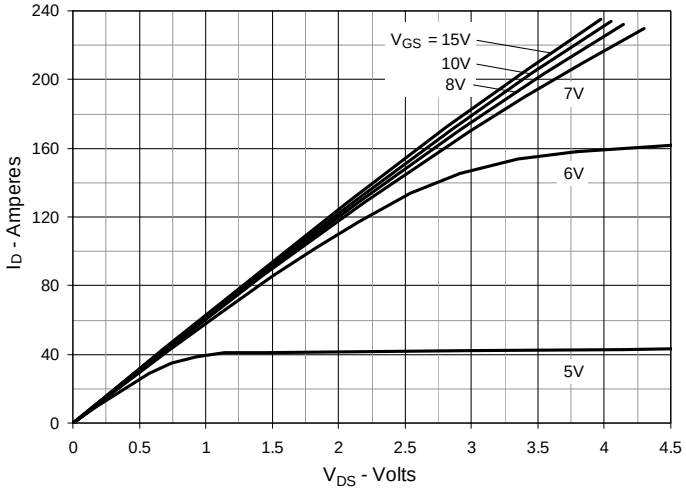


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 115A Value vs. Junction Temperature

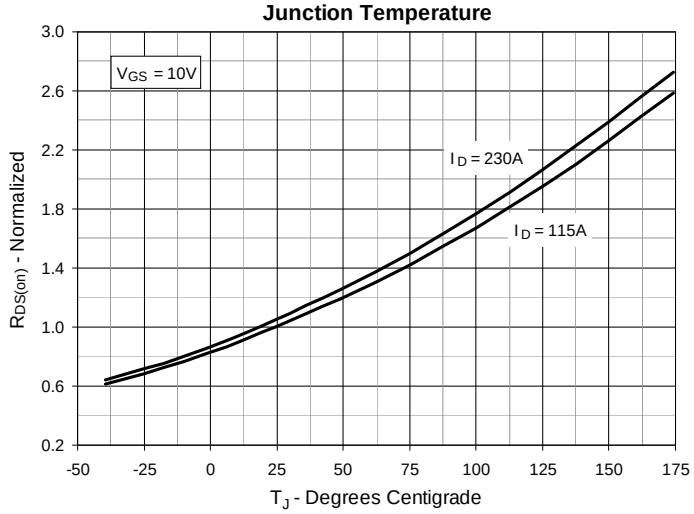


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 115A Value vs. Drain Current


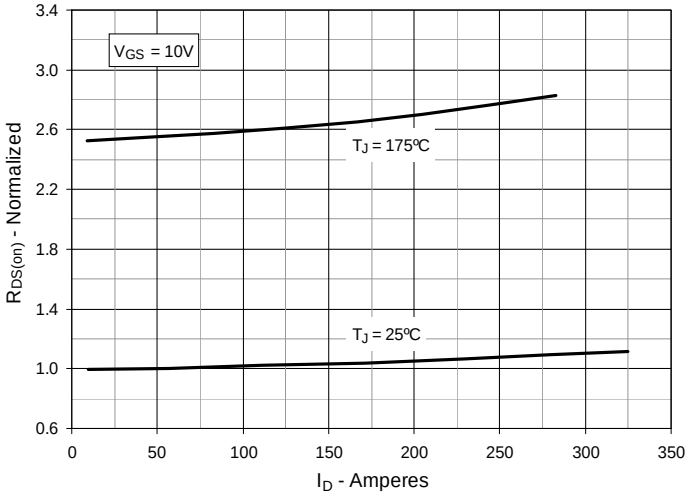


Fig. 6. Drain Current vs. Case Temperature

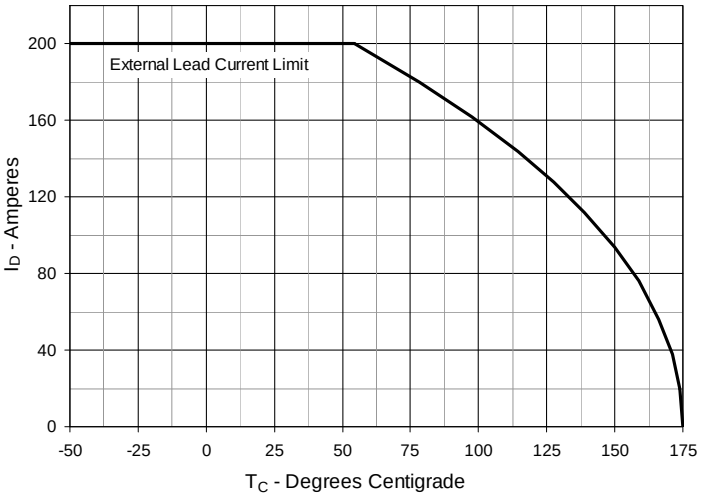

© 2014 IXYS CORPORATION, All Rights Reserved

Fig. 7. Input Admittance

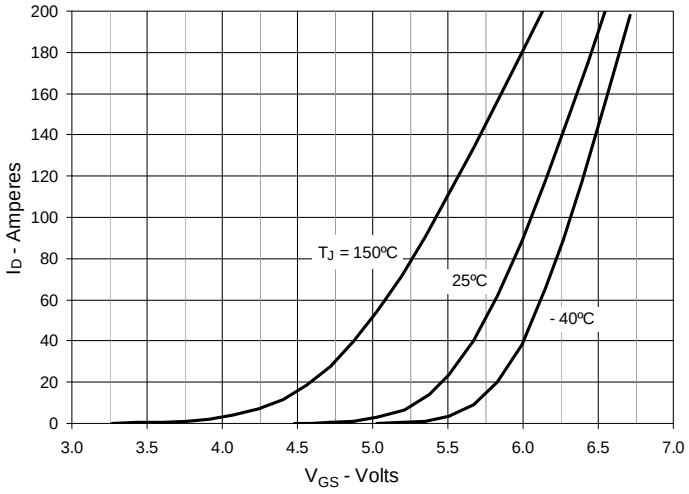


Fig. 8. Transconductance

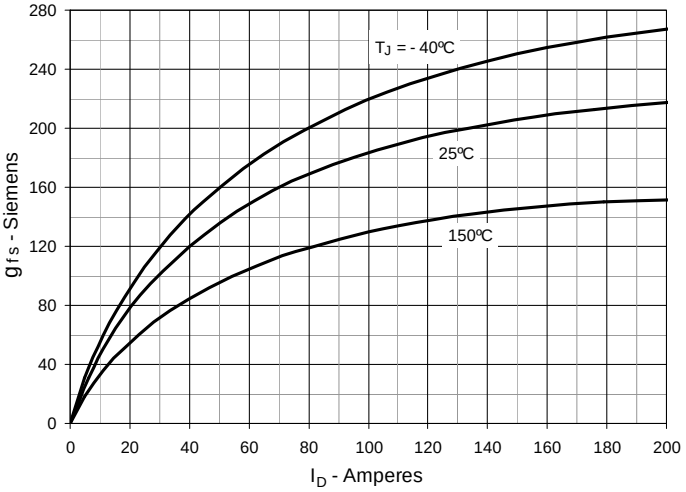


Fig. 9. Forward Voltage Drop of Intrinsic Diode

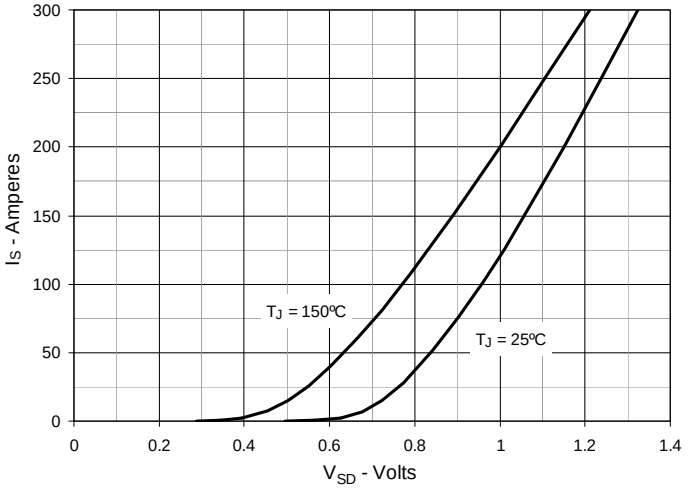


Fig. 10. Gate Charge

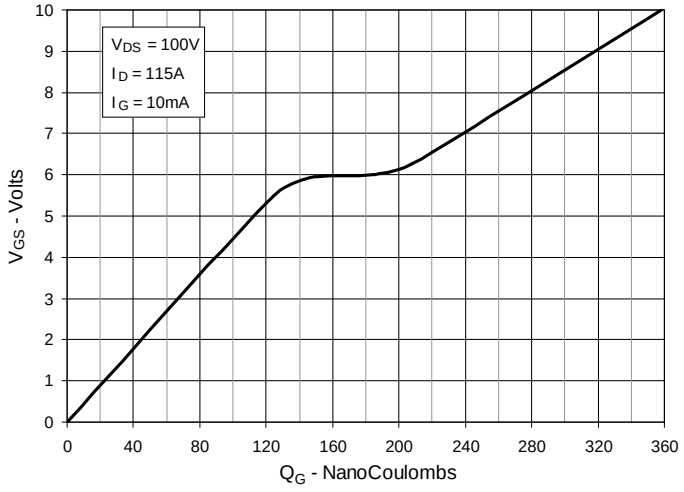


Fig. 11. Capacitance



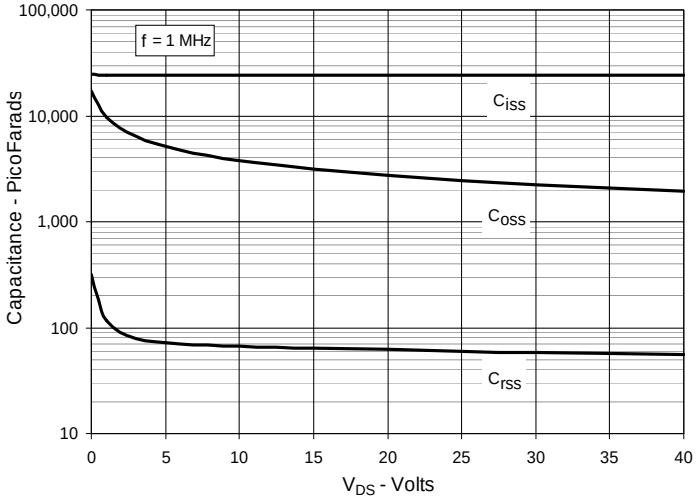


Fig. 12. Forward-Bias Safe Operating Area

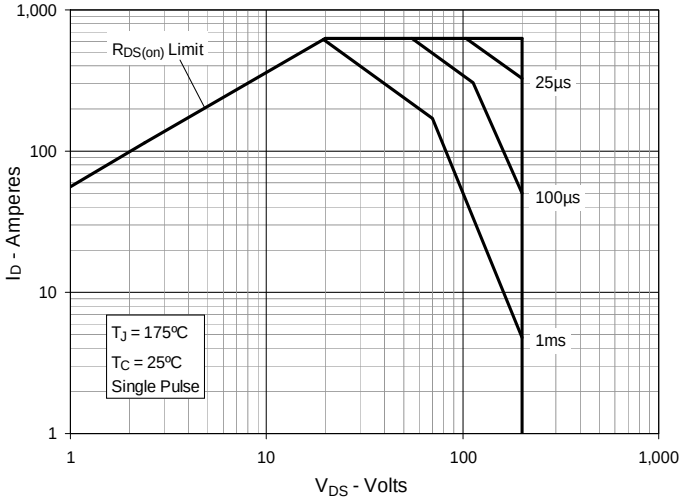

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 19. Maximum Transient Thermal Impedance

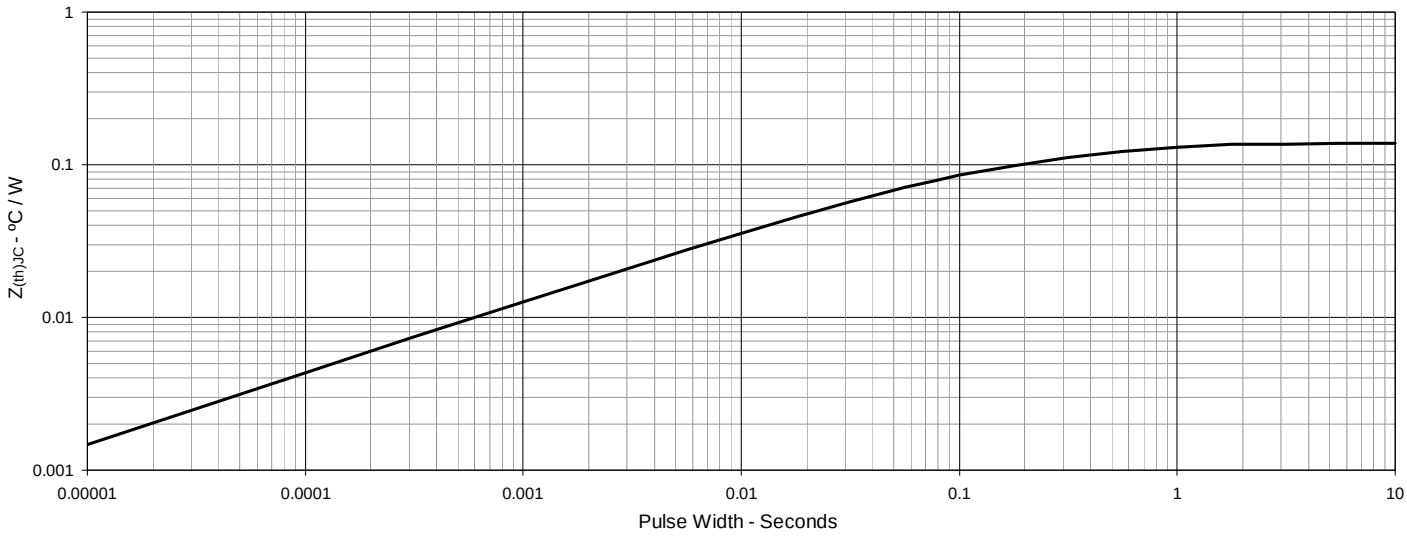

© 2014 IXYS CORPORATION, All Rights Reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Littelfuse:

1.5SMC51CA 37014000430 IXTP52P10P SM12-02HTG TP5.0SMDJ43CA 2920L600/12MR MDSR-4-22-38 PAA140S 1812L260/12MR NANOSMDC200F-2 RF1342-000 TPSMD33CA 1812L150/24MR DNA30E2200PA RF1543-000 SL1011A230A 60R250XF RF2562-000 RF2682-000 RF3304-000 03540601ZXGY 8.0SMDJ16CA P3100SBLRP RF3305-000 0233006.MXP 0242.080UAT1 03420828H 0481010.HXLP V150LA20AP 0327020.LXS