

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , . – –
© COPYRIGHT 2012 By Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.


LOC	DIST
J	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED	11MAY2012	H.M	N.Y

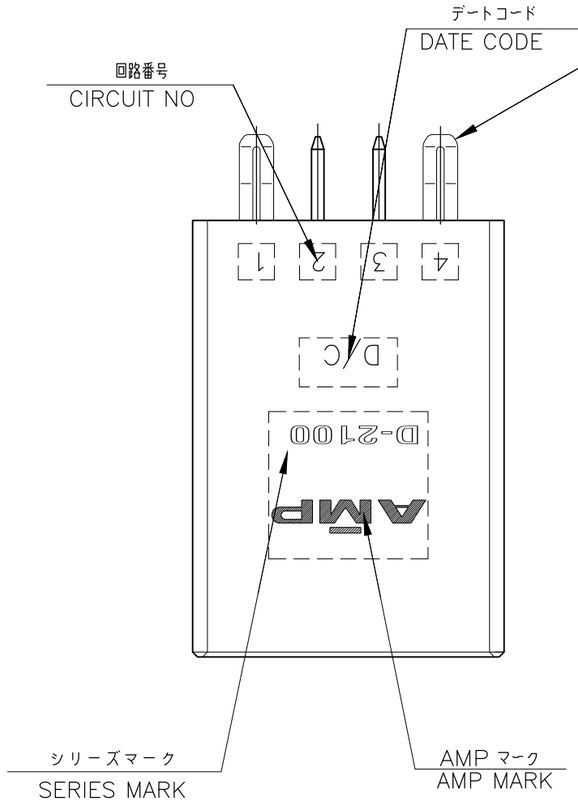


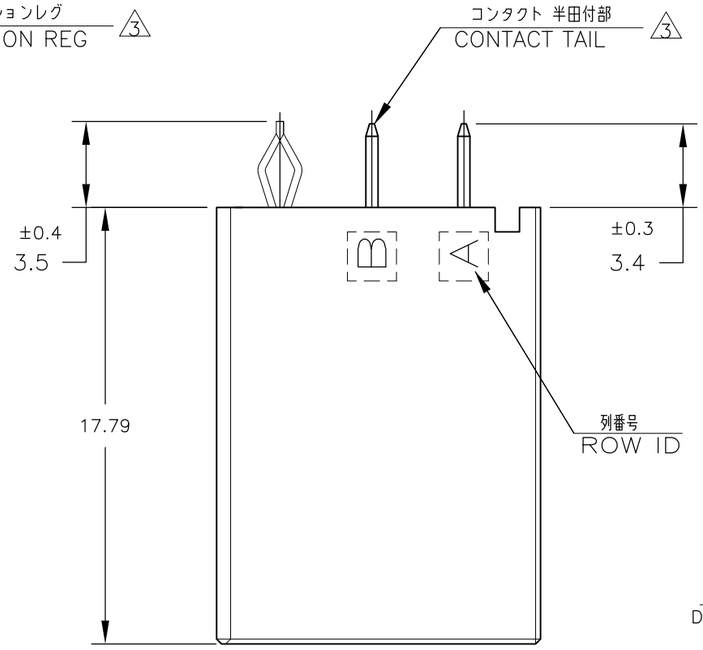

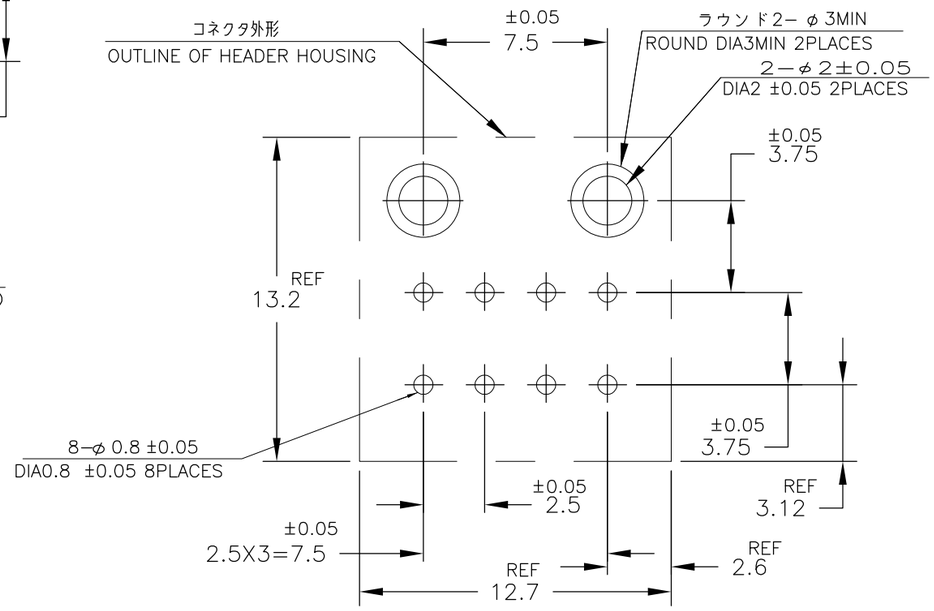


推奨基板取付け穴寸法 (公差：±0.05)
PC 基板厚：1.6 ±0.3
（コネクタ搭載面）

RECOMMENDED PC BOARD HOLE PATTERN (TOLERANCE :±0.05)
PC BOARD THICKNESS:1.6±0.3
(CONNECTOR MOUNT SIDE)

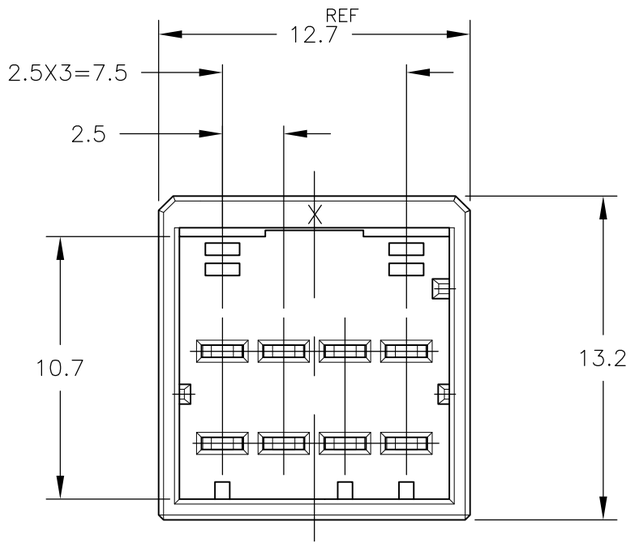

1318125−1
(KEYING X)



1318125−2
(KEYING Y)
SCALE:2−1

NOTES
1. MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC POLYESTER(94V−0)
TAB CONTACT:COPPER ALLOY
RETENTION LEG:BRASS
△2 FINISH(CONTACT AREA):0.38μm MIN GOLD PLATING OVER Ni PLATING
△3 FINISH(RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

注 記
1. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂 (94V−0)
タブ コンタクト：銅合金
リテンション レグ：黄銅
△2 めっき：コンタクト：全面Ni下地
接触部：0.38μm MIN金めっき
△3 めっき：利テンションレグとコンタクト半田付部
：ニッケル下地の上にスズめっき

Y	NATURAL	9−1318125−2
Y	BLACK	1318125−2
X	BLACK	1318125−1
KEY	COLOR	PART No.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ± 10≧ : ±0.3
2 PLC ± 30≧ > 10 : ±0.35
3 PLC ± 100≧ > 30 : ±0.4
4 PLC ±
ANGLES ±3°

MATERIAL: SEE NOTE
FINISH: SEE NOTE

DWN	I.IKEDA	07DEC1998
CHK	N.MATSUBARA	07DEC1998
APVD	I.HASEGAWA	07DEC1998
PRODUCT SPEC	108−5619	
APPLICATION SPEC	114−5258	
WEIGHT		

TE Connectivity

NAME
DOUBLE ROW HEADER ASSY 8P V−TYPE
DYNAMIC D−2100D

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C−1318125	—


CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 2 | REV D


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , . – –
© COPYRIGHT 2012 By Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC	DIST
J	—


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

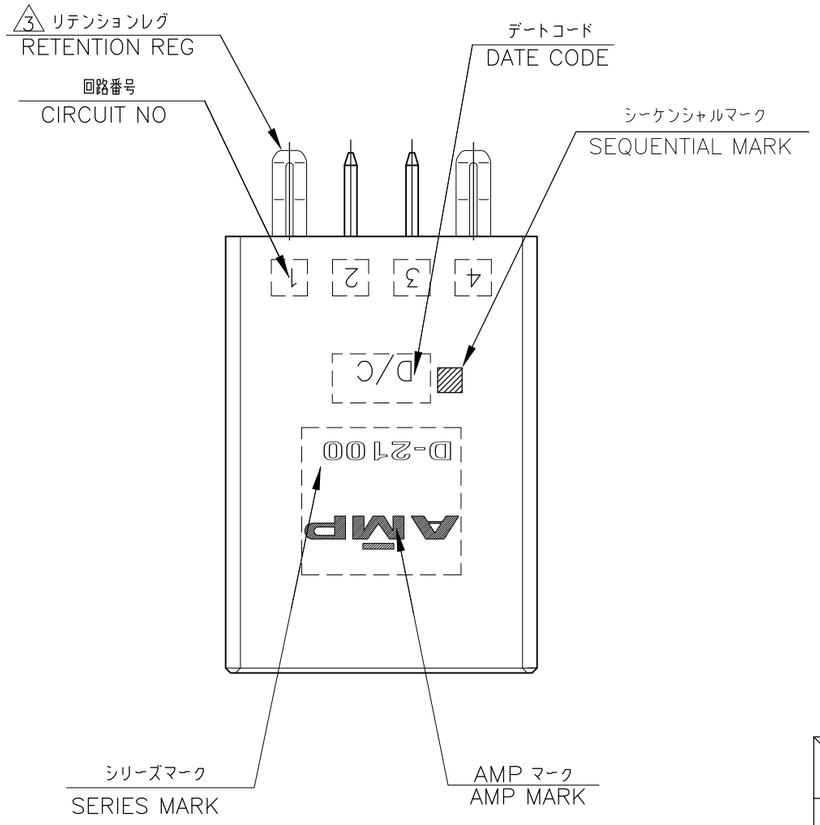

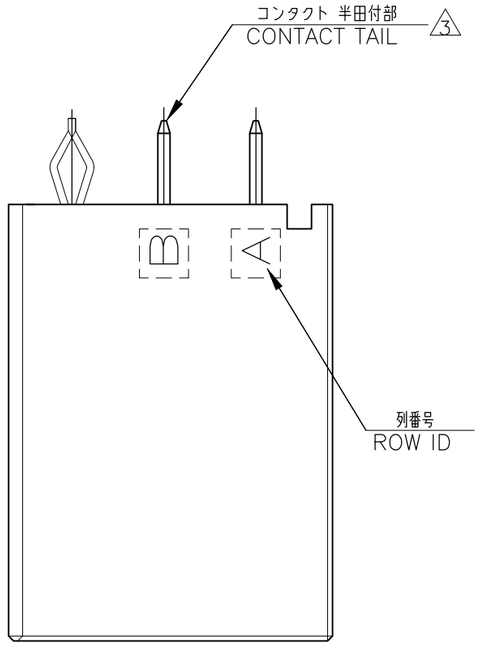


1–1318125–1,2;AS SHOWN
SEQUENTIAL TYPE

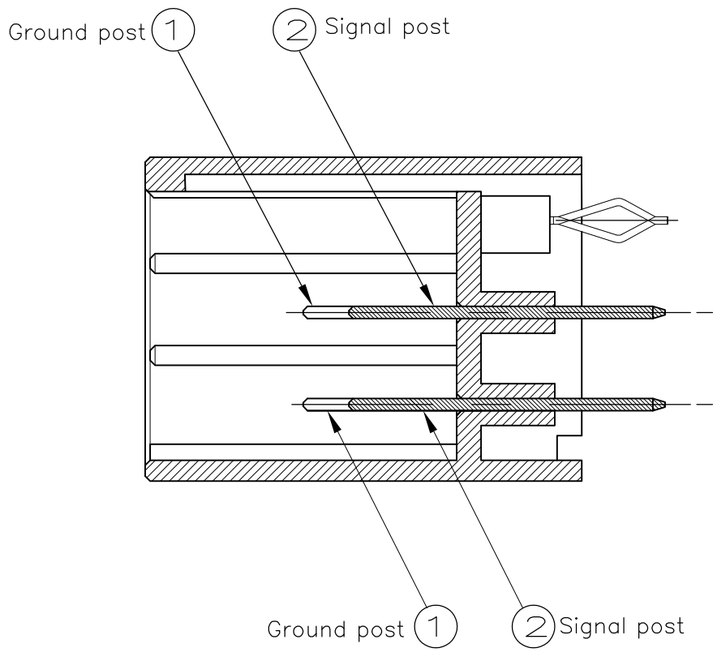


SECT A–A

	回路番号			
	1	2	3	4
列番号 B	② Signal	① Ground	② Signal	② Signal
列番号 A	② Signal	① Ground	② Signal	② Signal

POINT OF SEQUENTIAL
1–1318125–1,2

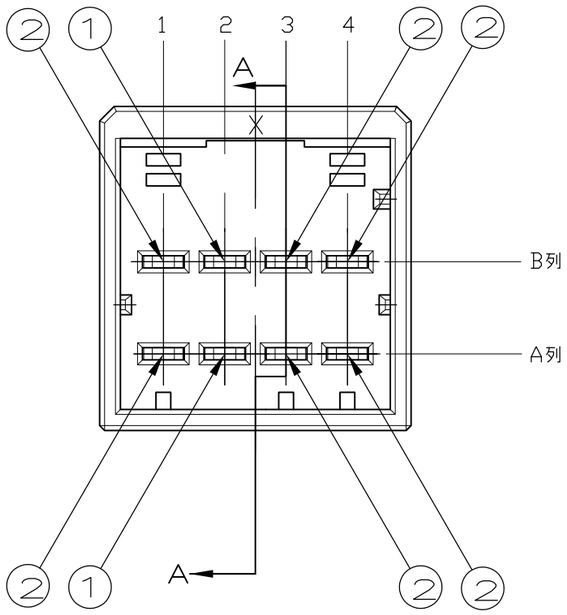

1–1318125–1
(KEYING X)



1–1318125–2
(KEYING Y)
SCALE:2–1

NOTES
1. MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC POLYESTER(94V–0)
TAB CONTACT:COPPER ALLOY
RETENTION LEG:BRASS
△2 FINISH(CONTACT AREA):0.38μmMIN GOLD PLATING OVER Ni PLATING
△3 FINISH(RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

注 記
1. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂 (94V–0)
タブ コンタクト:銅合金
リテンション レグ:黄銅
△2 めっき:コンタクト:全面Ni下地
接触部:0.38μm MIN金めっき
△3 めっき:利テンションレグとコンタクト半田付部
:ニッケル下地の上にスズめっき

KEY	COLOR	PART No.
Y	BLACK	1–1318125–2
X	BLACK	1–1318125–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ± 10≧ : ±0.3
2 PLC ± 30≧ > 10 : ±0.35
3 PLC ± 100≧ > 30 : ±0.4
4 PLC ±
ANGLES ±3°

MATERIAL: SEE NOTE
FINISH: SEE NOTE

DWN	I.IKEDA	07DEC1998
CHK	N.MATSUBARA	07DEC1998
APVD	I.HASEGAWA	07DEC1998
PRODUCT SPEC	108–5619	
APPLICATION SPEC	114–5258	
WEIGHT		

TE Connectivity

NAME
DOUBLE ROW HEADER ASSY 8P V–TYPE
DYNAMIC D–2100D

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1318125	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 2 OF 2 | REV D

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

141991-2 1969656-1 U5254-000005-030PA 2-292161-3 917696-1 936348-1 CPF0402B37K4E1 SBCHE154R7K 2377783-2 2380312-2 2834055-1 3631B101LL TE50BR39J 1393431-1 3-1393225-0 650075-000 1-962915-1 175977-2 1903112-2 CRGCQ2010J3K3 MPT100C18RF 2310537-1 RH73H2A40MKTN 3430B2F51RTDF ROX05SJ18R 1743455-2 2005330-1 SBCHE64R7K SMW73R0JT 1-794222-0